

Datasheet

RS PRO carbon water filter cartridge

Stock No: 195-2224



Technical Specifications:

10" length x 2.5" in diameter

30 deg C maximum temperature

5 litres per minute flow rate

Carbon filled

**Carbon to reduce bad taste and
chlorine**

Features & Benefits:


Benefits...

- Complete kit ready for installation
- Cartridges to remove most contaminants
- Easily installed
- 6 month cartridge reminder system
- Lifetime guarantee on housing

Replacement filter cartridges

Our customer service includes a registration and reminder service, if required we will contact you every 6 months following the purchase of your water filter and also advise you on where you can purchase your replacement cartridge. Because contaminants are trapped within the filter cartridge, you need to change cartridges on a regular basis to maintain a clean water supply. The lifespan of a cartridge is dependant on the quality of water passing through it. We recommend changing filter cartridges every 4-6 months.

Installation line drawings

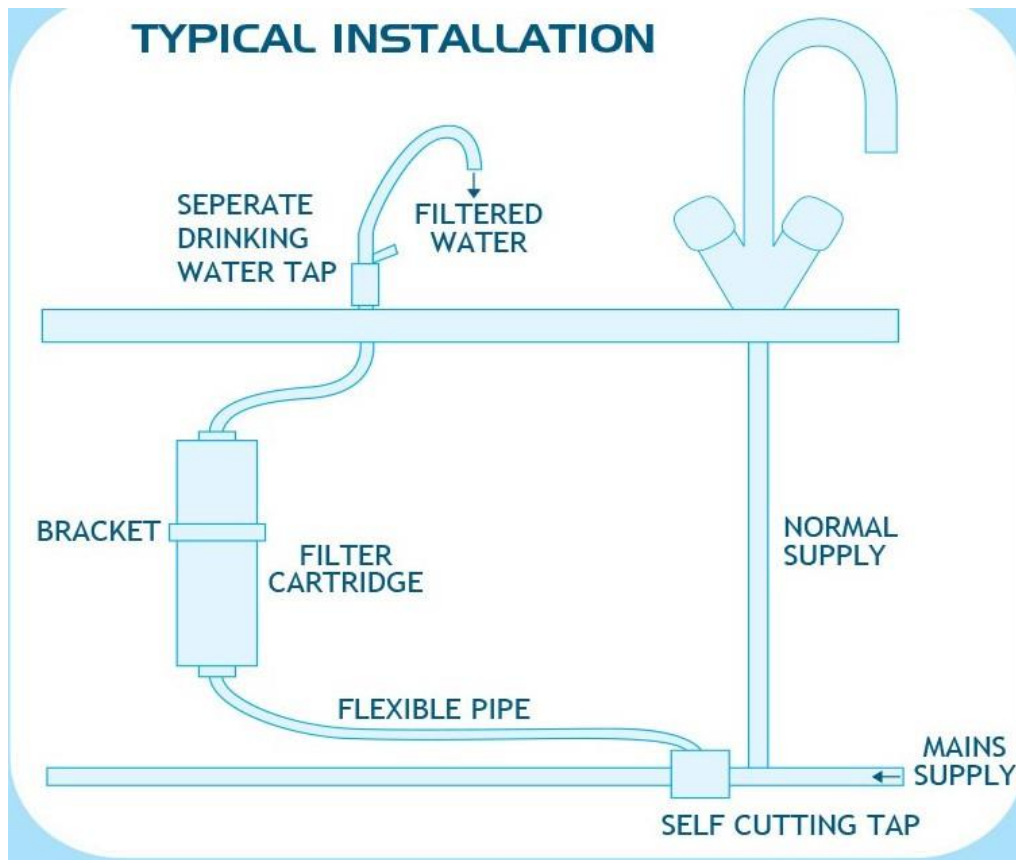

General

Cartridge replacement (recommended every 4-6 months)

1. Turn off water supply at self cutting tap.
2. Depress touch tap to release water pressure in tube.
3. Remove tube from inlet & outlet of cartridge.
4. If the replacement cartridge does not have push fit fittings, re-use fittings from old cartridge and seal using PTFE tape.
5. Note direction of flow and connect inlet and outlet flexible pipe to fittings. Push cartridge back into holding clip.
6. Turn on water, check for leaks. Flush to clear any discolouration.

Tools

- Drill & masonry bit
- Tape measure
- Screwdriver
- Plastic pipe cutter
- 12mm or 1/2" wood drill
- Adjustable spanner
- 14 & 19mm spanner