



Datasheet

RS PRO 2m USB C to DisplayPort

Stock number: 2299975


EN

The RSPRO 2m USB C to DisplayPort cables have an outer black PVC jacket and have an outer diameter of 4.8mm.

This cable is capable of 8k@60Hz or 4K @120Hz (HBR3) and supports HDR10.

USB C to DisplayPort cables are not bi-directional. The USB C connector must be connected to the source and the DisplayPort connector must be connected to the screen.

Please note: The USB C port needs to support DP Alt Mode

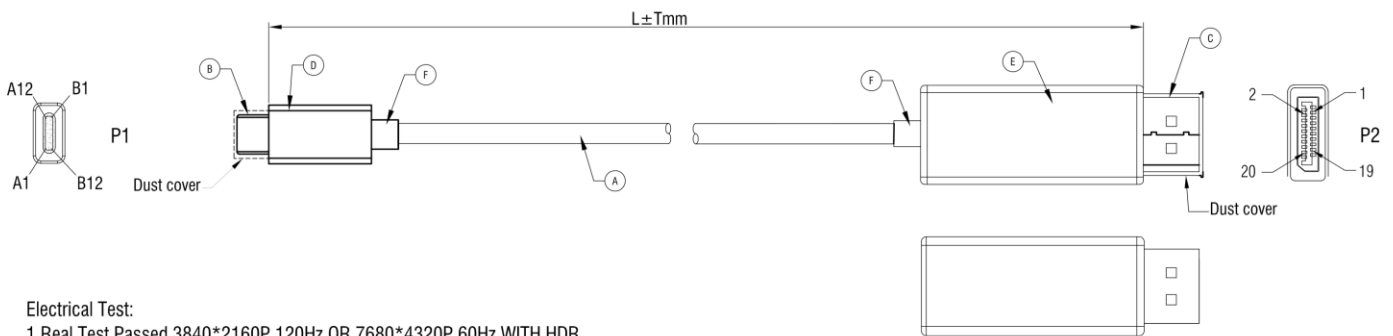

Electrical Test:
 1.Real Test Passed 3840*2160P 120Hz OR 7680*4320P 60Hz WITH HDR.
 2.Real Test Not Twinkling,Double Vision and Decolor.

F	1	BLACK 45P PVC	6	G
E		DP MALE SHELL(GREY ALLOY SHELL)	1	PCS
D		USB TYPE-C MALE SHELL(GREY ALLOY SHELL)	1	PCS
C		DP MALE(Black Insulator,Gold Plated)+PCB*A(IC:IT670FN)	1	PCS
B		USB Type-C MALE(Black Insulato,Gold Plated)	1	PCS
A		UL2725 (32#*1P+D+AL/MY)*5+32#*4C+24#*2C+AL+B OD=4.8mm,BLACK PVC JACKET.	1	PCS
NUMBER		PRODUCT SPECIFICATIONS	Quantity	Unit

RoHS / REACH / CE

rspro.com