

# **FEATURES**

- Optimized NKE
  design
- 0 Ribs on outer ring and 2 on inner ring
- Glass fibre reinforced polyamide cage
- Single row cylindrical roller bearing

# Cylindrical Roller Bearing 25x52x15mm

**RS Stock No.: 2482880** 



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.




## **Product Description**

A range of RS Pro single row Cylindrical Roller Bearings, offering versatility and overall high performance. RS Pro Cylindrical Roller bearings utilise either a Polyamide or Brass cage and optimised internal geometry to ensure adequate operation.

#### **General Specifications**

| Bearing Type   | Single Row Cylindrical Roller Bearing |
|----------------|---------------------------------------|
| Number of Rows | 1                                     |
| Material       | Steel                                 |
| Cage Material  | Glass fibre reinforced polyamide      |
| Race Type      | Cylindrical                           |
| Outer Rib Type | None                                  |
| Inner Rib Type | 2 Ribs                                |
| Bore Type      | Cylindrical                           |
| Application    | Pumps, Gearboxes, Motors              |



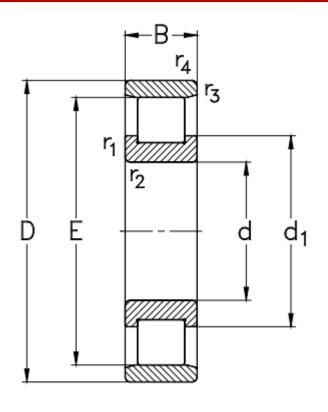

Ν...

## Mechanical Specifications

| Inside Diameter (d)        | 25mm     |
|----------------------------|----------|
| Outside Diameter (D)       | 52mm     |
| Width (B)                  | 15mm     |
| Diameter Under Rollers (E) | 46.5mm   |
| Dynamic Load Rating        | 29.5kN   |
| Static Load Rating         | 28.0kN   |
| Limiting Speed             | 16000rpm |
| Mass                       | 0.14kg   |

## **Operation Environment Specifications**

| Temperature Range | Up to 150°C |
|-------------------|-------------|



# INCLUDES WITH PRODUCT / STANDARD ACCESSORIES / CONSTRUCTIONAL DIAGRAM