

# Vinyl Insulated Ring Terminal

## Easy Entry, Butted Seam

**multicomp** PRO



Maximum Electric Current:


A.W.G.	22	20	18	16	14	12	10
AMP.	9	12	17	18	30	35	50

Max. Electrical Rating : 105°C 600 Volts Max.

Connector Material : Vinyl

Insulation Colour : 22-16A.W.G.: Red, 16-14A.W.G.: Blue, 12-10A.W.G.: Yellow

Terminal Material : Copper

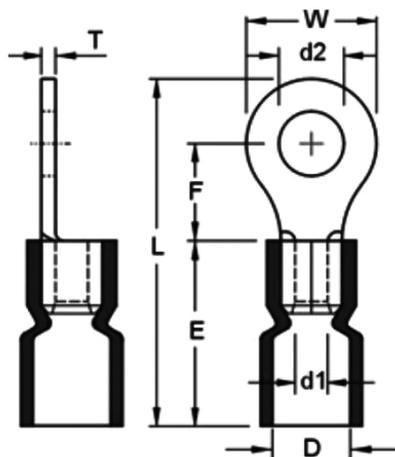

### Part Number Table

Description	Wire Range	Stud Size d2		Dimension inch(mm)							Part Number
				W	F	L	E	D	d1	T	
Vinyl Insulated Ring Terminal Easy Entry, Butted Seam	16-14 A.W.G 1.5-2.5 mm <sup>2</sup>	1/4	0.252	0.472	0.433	1.114	0.453	0.177	0.091	0.031	RVE2-6
			6.4	12	11	28.3	11.5	4.5	2.3	0.8	
	12-10 A.W.G 4-6 mm <sup>2</sup>	#6	0.146	0.283	0.24	0.937	0.555	0.248	0.134	0.039	RVE5-3.7
		#8	0.169	0.283	0.24	0.937	0.555	0.248	0.134	0.039	RVES5-4
			4.3	7.2	6.1	23.8	14.1	6.3	3.4	1	

Newark.com/multicomp-pro  
Farnell.com/multicomp-pro  
Element14.com/multicomp-pro

**multicomp** PRO

# Vinyl Insulated Ring Terminal

## Easy Entry, Butted Seam

**multicomp** PRO

Description	Wire Range	Stud Size d2		Dimension inch(mm)						Part Number	
				W	F	L	E	D	d1		T
Vinyl Insulated Ring Terminal Easy Entry, Butted Seam	12-10 A.W.G 4-6 mm <sup>2</sup>	#10	0.209 5.3	0.374 9.5	0.327 8.3	1.067 27.1	0.555 14.1	0.248 6.3	0.134 3.4	0.039 1	RVE5-5
		1/4	0.252 6.4	0.472 12	0.413 10.5	1.205 30.6	0.555 14.1	0.248 6.3	0.134 3.4	0.039 1	RVE5-6
		5/16	0.331 8.4	0.591 15	0.524 13.3	1.382 35.1	0.555 14.1	0.248 6.3	0.134 3.4	0.039 1	RVE5-8

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro  
Farnell.com/multicomp-pro  
Element14.com/multicomp-pro

**multicomp** PRO