



## CLL series Single-Acting Lock Nut Cylinder



Capacity: 50 ~ 1000 Ton  
Stroke: 50 ~ 300 mm  
Maximum Operating Pressure: 700 bar

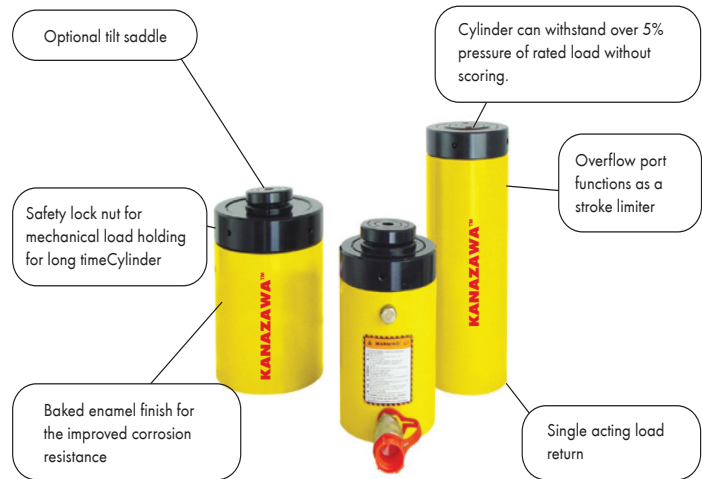

### CLL Series Selection Chart

Stock Code	Model	Capacity (Ton)	Stroke (mm)	Min Height (mm)	Outside Diameter (mm)	Effective Area (cm <sup>2</sup> )	Oil Capacity (cm <sup>3</sup> )	Thread Length (mm)	Weight (Kg)
AQ04844-K	CLL502	50	50	164	125	70.9	355	95	15
AQ04845-K	CLL504	50	100	214	125	70.9	709	95	20
AQ04846-K	CLL506	50	150	264	125	70.9	1064	95	25
AQ04847-K	CLL508	50	200	314	125	70.9	1418	95	30
AQ04848-K	CLL5010	50	250	364	125	70.9	1773	95	35
AQ04849-K	CLL5012	50	300	414	125	70.9	2127	95	40
AQ04850-K	CLL1002	100	50	187	165	132.7	664	130	30
AQ04851-K	CLL1004	100	100	237	165	132.7	1327	130	39
AQ04852-K	CLL1006	100	150	287	165	132.7	1991	130	48
AQ04853-K	CLL1008	100	200	337	165	132.7	2654	130	56
AQ04854-K	CLL10010	100	250	387	165	132.7	3318	130	64
AQ04855-K	CLL10012	100	300	437	165	132.7	3981	130	73
AQ04856-K	CLL1502	150	50	209	205	198.6	993	159	53
AQ04857-K	CLL1504	150	100	259	205	198.6	1986	159	66
AQ04858-K	CLL1506	150	150	309	205	198.6	2979	159	78
AQ04859-K	CLL1508	150	200	359	205	198.6	3972	159	92
AQ04860-K	CLL15010	150	250	409	205	198.6	4965	159	104
AQ04861-K	CLL15012	150	300	459	205	198.6	5958	159	117
AQ04862-K	CLL2002	200	50	243	235	265.6	1330	184	83
AQ04863-K	CLL2006	200	150	343	235	265.6	3989	184	117
AQ04864-K	CLL20010	200	250	443	235	265.6	6648	184	152
AQ04865-K	CLL2502	250	50	249	275	265.6	1832	216	116
AQ04866-K	CLL2506	250	150	349	275	265.6	5496	216	162
AQ04867-K	CLL25010	250	250	449	275	265.6	9160	216	210
AQ04868-K	CLL3002	300	50	295	310	456.2	2281	241	173
AQ04869-K	CLL3006	300	150	395	310	456.2	6843	241	233
AQ04870-K	CLL30010	300	250	495	310	456.2	11405	241	293
AQ04871-K	CLL4002	400	50	335	350	559.9	2800	267	250
AQ04872-K	CLL4006	400	150	435	350	559.9	8399	267	327
AQ04873-K	CLL40010	400	250	535	350	559.9	13998	267	402
AQ04874-K	CLL5002	500	50	375	400	731.1	3656	305	367
AQ04875-K	CLL5006	500	150	475	400	731.1	10967	305	466
AQ04876-K	CLL50010	500	250	575	400	731.1	18278	305	567
AQ04877-K	CLL6002	600	50	395	430	854.8	4277	330	446
AQ04878-K	CLL6006	600	150	495	430	854.8	12830	330	562
AQ04879-K	CLL60010	600	250	595	430	854.8	21383	330	679
AQ04880-K	CLL8002	800	50	455	505	1176.9	5882	387	709
AQ04881-K	CLL8006	800	150	555	505	1176.9	17645	387	870
AQ04882-K	CLL80010	800	250	655	505	1176.9	29408	387	1029
AQ04883-K	CLL10002	1000	50	495	560	1466.4	7329	432	949
AQ04884-K	CLL10006	1000	150	595	560	1466.4	21986	432	1141
AQ04885-K	CLL100010	1000	250	695	560	1466.4	36643	432	1333