


FEATURES

- Metric threads
- High mechanical strength
- Ideal for use where good insulation and corrosion resistance is required
- Suitable for use in high voltage assemblies
- Moulded from ivory coloured Nylon 6,6

RS PRO Nylon Countersunk Head Machine Screws

RS Stock No.:

2326910,2326901,2326931,2326903,2326953,
2326989,2326914,2326895,2326906,2326897,
2326919,2326912,2326943,2326964,2326982,
,2326924,2326913,2326948,2326969,2326985,
2326946,2326967,2326984,2326941,
2326962,2326907,2326921,2326926

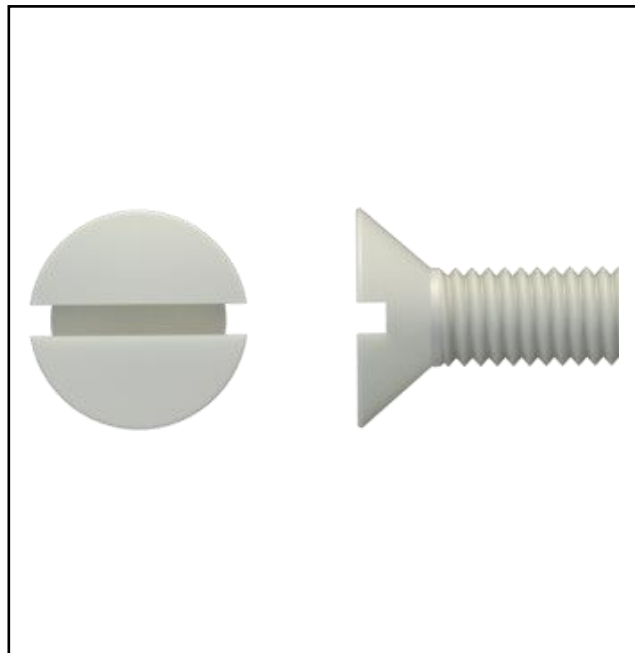

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.


Nylon Countersunk Head Machine Screws

Product Description

RS Pro machine screws are moulded from ivory coloured Nylon 6,6. This countersunk head machine screw features metric thread and high mechanical strength. The machine screw is ideal for use where good insulation and corrosion resistance is required. This screw is suitable for use in high voltage assemblies.

Material Specifications

Material	Nylon 6,6
Colour	Natural

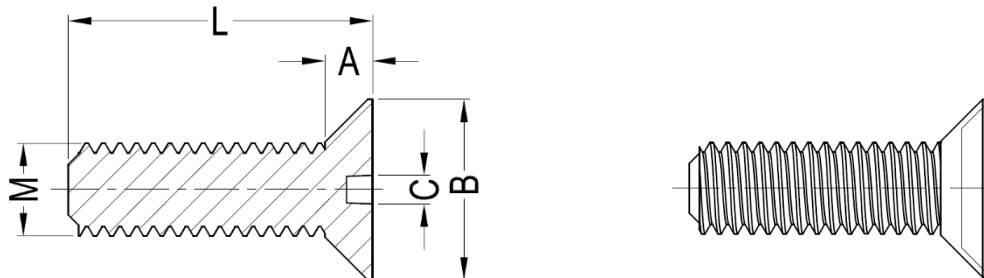

General Specifications

Thread Size (M)	RS Stock No. / Length (L)								Head Size		
	6	8	10	12	16	20	25	30	A (Head Ht.)	B (Head Dia.)	C
M2 x 0.4	2326910		2326903		2326906		2326907		1.2	3.8	0.5
M2.5 x 0.45	2326901			2326895	2326897				1.5	4.7	0.6
M3 x 0.5	2326931		2326914		2326919	2326921	2326924	2326926	1.65	5.5	1
M3.5 x 0.6					2326912		2326913		1.93	6.5	1
M4 x 0.7	2326953			2326941	2326943	2326946	2326948		2.7	8.4	1.3
M5 x 0.8				2326962	2326964	2326967	2326969		2.7	9	1.4
M6 x 1.0		2326989			2326982	2326984	2326985		3.3	11	1.8

Dimensions are in millimetres (mm)

Approvals

Standards Met	DIN 963 / ISO2009
----------------------	-------------------

Nylon Countersunk Head Machine Screws

