




## MALE- MALE Cylindrical mount



Simple and cost-effective mount. For use in compression and shear. A very large range of available size and studs.

H = Height  
 D = Diameter  
 G = Tread  
 L = Stud Length

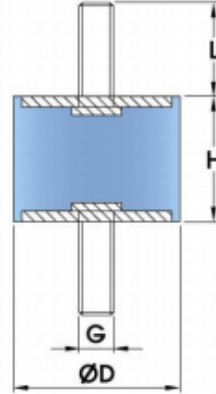

RS Code	Item Code	Description	D (mm)	H (mm)	G x L (mm)	Max Compression Load (kg)	Max Shear Load (kg)
1623251	A1515M515-2	Cyl. Mount (M/M) 15x15mm M5x15 60 ShA	15	15	M5x15	13.3	5.2
1623245	A2015M618-2	Cyl. Mount (M/M) 20x15mm M6x18 60 ShA	20	15	M6x18	25.5	9.2
1623227	A2020M618-3	Cyl. Mount (M/M) 20x20mm M6x18 70 ShA	20	20	M6x18	34.5	13.5
1623234	A2515M820-3	Cyl. Mount (M/M) 25x15mm M8x20 70 ShA	25	15	M8x20	63.5	21.1
1623238	A3020M820-2	Cyl. Mount (M/M) 30x20mm M8x20 60 ShA	30	20	M8x20	60	20.8
1623243	A4020M1025-3	Cyl. Mount (M/M) 40x25mm M10x20 70ShA	40	25	M10x20	180.2	54.2

1623240	A4025M1025-3	Cyl. Mount (M/M) 40x25mm M10x25 70ShA	40	25	M10x25	164.6	54.2
1623236	A6025M1025-3	Cyl. Mount (M/M) 60x25mm M10x25 70ShA	60	25	M10x25	417.1	99.9