




Wiha. Premium Tools
for Professionals.

Wiha SoftFinish®. The Specialist for Dry & General Applications.

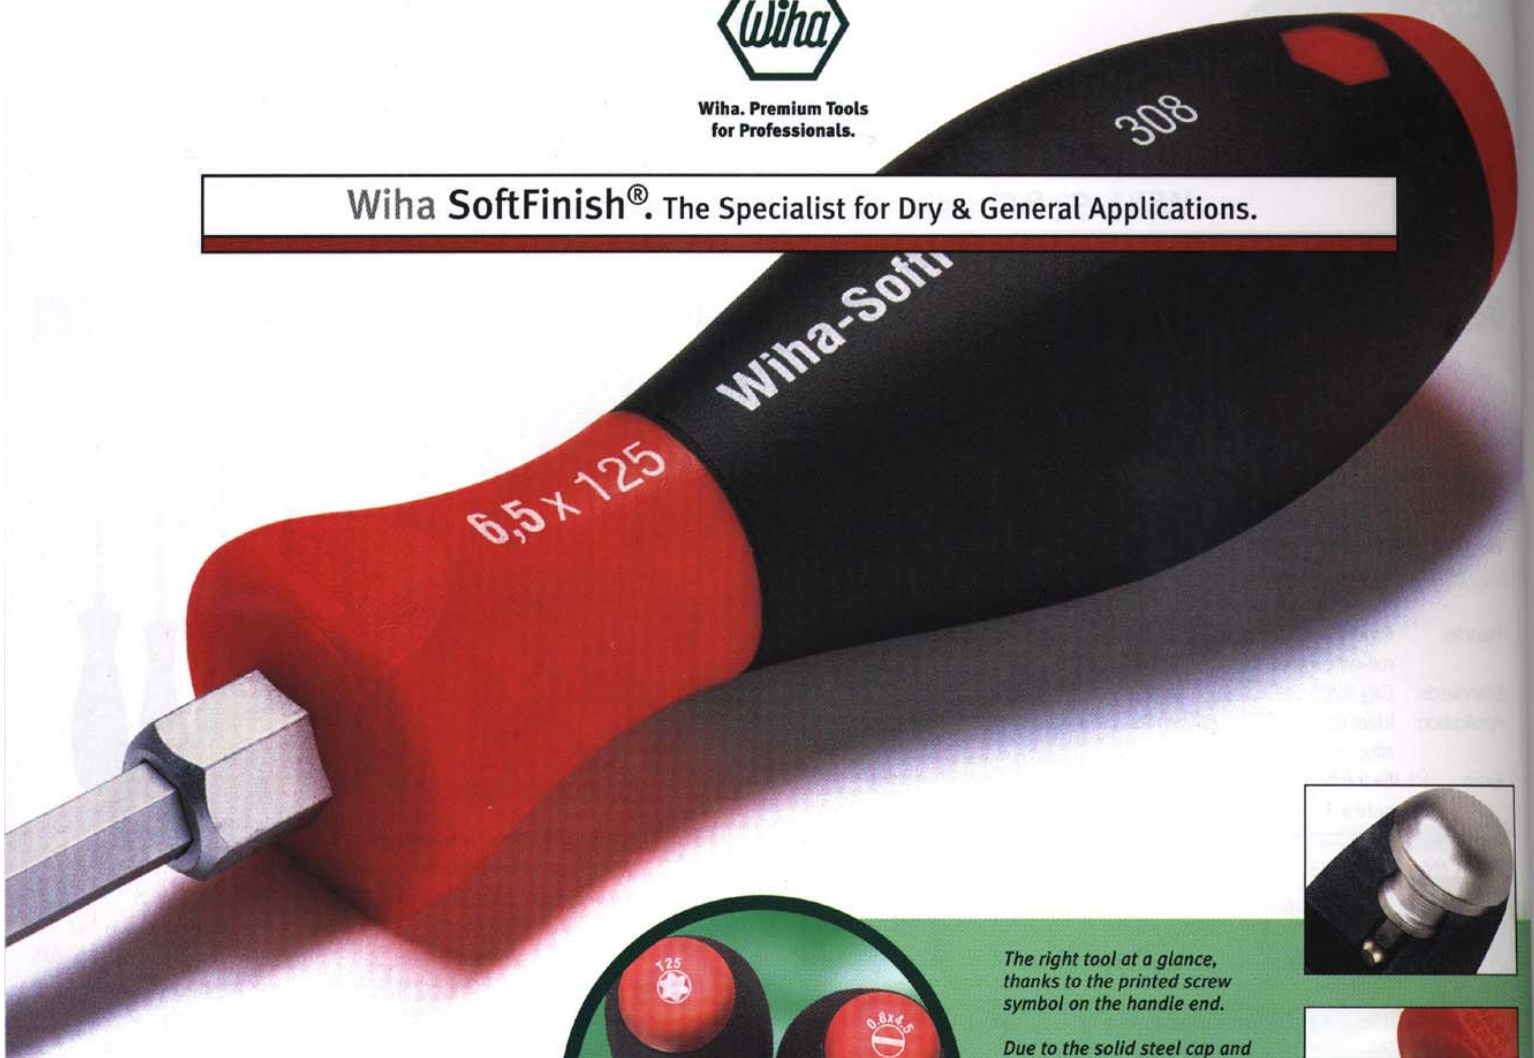

The right tool at a glance, thanks to the printed screw symbol on the handle end.

Due to the solid steel cap and hex blade extending through the handle, there is no loss of impact energy when a precise hammer blow is applied.

Blade with hex bolster for wrenches to use on particularly tight screws.




SoftFinish® Advantages:

- Multi-component SoftFinish® handle provides maximum user comfort
- Ergonomically perfect handle design
- Available in versions with round blade, hex blade or hex blade with solid steel cap
- Blade made of high quality chrome-vanadium-molybdenum steel, through-hardened and chrome plated
- Wiha ChromTop-finish on tip for a perfect fit every time
- Printed screw symbol on handle end for fast identification

The Wiha SoftFinish® zone features a solid moulded core with soft outer grip. This requires less force, yet achieves 40% more torque than conventional handles. The handle is shaped to fit comfortably in the hand, providing maximum torque forces in dry and general working conditions.

If a stuck screw has to be loosened, a precise hammer blow can be applied to the solid steel cap. Due to the hex blade extending through the handle to the steel cap, there is no loss of impact energy.

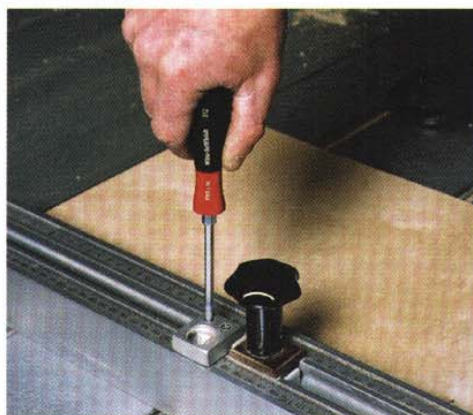



Wiha. Premium Tools
for Professionals.

Wiha SoftFinish®. The Specialist for Dry & General Applications.

For Slotted Screws.



302 Slotted Screwdriver.

Blade: Round blade.
High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop finish on tip for a perfect fit every time.

Handle: Ergonomic Wiha SoftFinish® handle, multi-component with roll-off protection.

Standards: DIN 5265, ISO 2380.

Extra: Especially for dry and general applications.

Order-No.	Ø	Blade	Blade	Blade	Blade	Blade	Blade	Blade
00684 6	2.0	65	0.4	169	2.0	23	10	
00685 3	2.5	75	0.4	179	2.5	23	10	401-7353
00686 0	3.0	80	0.5	184	3.0	23	10	830-835
00687 7	3.0	100	0.5	204	3.0	23	10	
00689 1	3.0	150	0.5	254	3.0	23	10	
00690 7	3.0	200	0.5	304	3.0	23	10	
00691 4	3.5	100	0.6	204	3.5	23	10	401-7365
26931 9	3.5	200	0.5	304	3.5	23	10	
00692 1	4.0	100	0.8	211	4.0	30	10	830-859
00694 5	4.0	150	0.8	261	4.0	30	10	
00695 2	4.0	200	0.8	311	4.0	30	5	
00696 9	4.0	300	0.8	411	4.0	30	5	
00697 6	4.5	125	0.8	236	4.5	30	10	
00698 3	5.5	125	1.0	236	5.5	30	10	
00700 3	5.5	150	1.0	261	5.5	30	10	830-872
00701 0	5.5	200	1.0	311	5.5	30	10	
00702 7	5.5	300	1.0	411	5.5	30	5	
00704 1	6.5	100	1.2	218	6.0	36	10	
00703 4	6.5	150	1.2	268	6.0	36	10	835-432
00706 5	6.5	200	1.2	318	6.0	36	5	
00708 9	8.0	150	1.2	274	7.0	41	10	
00707 2	8.0	175	1.2	299	7.0	41	10	830-902
00709 6	8.0	175	1.6	299	7.0	41	5	
00711 9	10.0	200	1.6	324	8.0	41	5	830-926
00712 6	12.0	250	2.0	374	8.0	41	5	
00713 3	14.0	250	2.5	374	11.0	41	5	

• Non-DIN sizes.

For Slotted Screws.



308 Slotted Screwdriver.

Blade: Hex blade with hex bolster for additional torque.
High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop finish on tip for a perfect fit every time.

Handle: Ergonomic Wiha SoftFinish® handle, multi-component with roll-off protection.

Standards: DIN 5265, ISO 2380.

Extra: Especially for dry and general applications.

Order-No.	Ø	Blade	Blade	Blade	Blade	Blade	Blade	Blade	
00731 7	3.5	75	0.6	186	4.0	-	30	10	
00732 4	4.5	90	0.8	201	4.0	-	30	10	
00733 1	5.5	100	1.0	213	5.0	8	36	10	401-7328
00734 8	6.5	125	1.2	238	6.0	10	36	10	
00735 5	7.0	125	1.1	238	6.0	10	36	10	401-7330
00736 2	8.0	150	1.2	268	8.0	13	41	10	
00737 9	9.0	150	1.4	268	8.0	13	41	10	401-7341
00738 6	10.0	175	1.6	293	8.0	13	41	5	
00739 3	12.0	200	2.0	318	10.0	16	41	5	
00740 9	14.0	250	2.5	368	10.0	16	41	5	

• Non-DIN sizes.



530 Slotted Screwdriver.

Blade: Hex blade extending through handle, hex bolster for additional torque, solid steel cap.
High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop finish on tip for a perfect fit every time.

Handle: Ergonomic Wiha SoftFinish® handle, multi-component with roll-off protection.

Standards: DIN 5265, ISO 2380.

Extra: Especially for dry and general applications.

Order-No.	Ø	Blade	Blade	Blade	Blade	Blade	Blade	Blade
03223 4	3.5	75	0.6	186	4.0	-	30	10
03224 1	4.5	90	0.8	201	4.0	-	30	10
03225 8	5.5	100	1.0	213	5.0	8	36	10
03226 5	6.5	125	1.2	238	6.0	10	36	10
03228 9	8.0	150	1.2	271	8.0	13	41	5
03230 2	10.0	175	1.6	296	8.0	13	41	5
03231 9	12.0	200	2.0	321	10.0	16	41	5
03232 6	14.0	250	2.5	371	10.0	16	41	5

• Non-DIN sizes.