

## AccSafe HiCut 5 Glove

High level anti cut 5 - 758127



reinforced between  
index and thumb

EN388



4X43DP

### Technical EN388



Abrasion	0	1	2	3	4	
Cut (Coup)	0	1	2	3	4	5
Tear	0	1	2	3	4	
Puncture	0	1	2	3	4	
Cut (TDM)	A	B	C	D	E	F
Impact	P	F	X			

Material	Nitrile foam coating palm & TPR knuckle
Liner	HPPE / Glass Fiber
Color	Grey / Black
Size	6/XS, 7/S, 8/M, 9/L, 10/XL, 11/XXL

### Instruction for use:

Any direct contact with sharp edges, such as glass, metal, ceramics and others materials. Oil & Gas industrial, Rigger, heavy equipment operation.

### Limits for use:

Do not use outside of the above mentioned domains. This glove is free from allergenic substances by ingredients that are neutral to the skin.

### Instructions for storage:

Store in its original packaging in a cool, dry place protected from frost and light. Avoid direct sunlight, heat, flame and source of Ozone.

### Instructions for cleaning/maintenance:


No special maintenance or cleaning is needed or recommended for this type of glove.

### Performances:

Meets the requirements of Europe, particularly in the field of ergonomics, safety, comfort, ventilation, flexibility and the standards EN388:2003 (4,5,4,4), and EN388:2016 (4,X,4,3,D,P). X standards for not tested.

### Features

- TPR (Thermoplastic Rubber) knuckle and metacarpal impact protection.
- The premium standard for precision handling in dry environments.
- High performance seamless knit yarns and fibers that offer cut level 5 with EN388:2003 and cut level D with EN388:2016.
- Micro-foam sandy nitrile coating palm offers 360° breathability.
- Optimized excellent grip delivered through micro foam sandy finish.
- Minimal penetration (strike through) leaving only the soft liner resting against the skin.

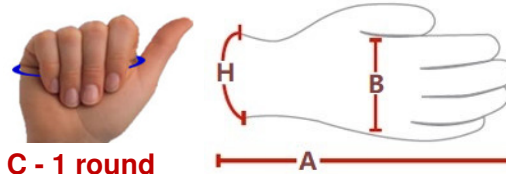

### Dimensions (inch/mm), length tolerance (+/- 5mm)

Size	6/XS	7/S	8/M	9/L	10/XL	11/XXL
A	8.6 / 220	9.0 / 230	9.4 / 240	9.8 / 250	10.2 / 260	10.4 / 265
B	3.3 / 86	3.6 / 92	3.8 / 98	4.0 / 104	4.2 / 108	4.4 / 112
C	152-178	178-203	203-229	229-254	254-279	279+
H	Blue	Green	White	Brown	Black	Yellow



### Applications

- Rigger and inspection
- Handling of small oily parts and components
- Oil and Gas industrial
- Maintenance
- Logistics & warehousing
- Heavy equipment handling & operation
- Wiring operations
- Glass works
- General works

### Washing Instructions

- Recommend washing gloves in slightly warm water not exceeding 40°C.
- A mild non-ionic laundry soap or detergent should be used.
- A 5-10 minute cycle time should be employed.
- Tumble dry on low - maximum temperature 140°F (60°C)
- Machine wash cool, up to 3 cycles, no bleach, no fabric softener, do not use dry cleaning solutions, do not iron.
- Rinse in cool water. Repeat wash and rinse if soiling is especially heavy.
- After washing the gloves may not have the same performance level as original. AccSafe® cannot accept any liability if the gloves do not have the same levels of performance prior to washing, even if it was carried out according to the instructions indicated.

## AccSafe HiCut 5 Impact Glove

High level anti cut 5 - 758127

### Care Instructions

- Used gloves maybe contaminated with infectious or hazardous substances, dispose of according to the Local Authority/Municipality Regulations, landfill or incinerate under controlled conditions. For more information on glove selection, usage and performances and for a copy of the COC please contact us as below.

### Warranty/Limitation of damages

- AccSafe® warrants that this product shall be in accordance with our standard specifications as of the date of delivery to authorized distributors/users.
- Except to the extent prohibited by law, this warranty is in lieu of all warranties, including any warranty of fitness for a particular purpose; AccSafe® liability shall be limited to the purchase price of the product at issue. Buyers and users of this product are deemed to have accepted the terms of this limitation of warranty, which may not be varied by any verbal or written agreement.

### Use

- **The glove should only be used in accordance with the pictograms printed on the glove.** Please ensure that if you are working with chemicals that the gloves have the chemical pictogram i.e. EN374 printed on the glove and are suitable for the chemical that you are exposed to. ***Further information about chemical permeation levels please contact us. This information does not reflect the actual duration of protection in the workplace and the differentiation between mixtures and pure chemicals. The chemical resistance has been assessed under laboratory conditions from samples taken from the palm only and relates only to the chemical tested. It can be different if it be used in a mixture.***
- Do not use these gloves to protect against serrated edges or blades or naked flames. If gloves are required for heat applications be sure that the glove conform to EN407 and that is tested in accordance with your requirements. Do not use these gloves if there is a risk of entanglement with moving machinery or moving machinery parts.
- Before use, inspect the gloves for any defects or imperfections and avoid wearing damaged, heavily soiled, worn or dirty (also internally) glove of any substance, this could irritate and/or infect the skin and cause dermatitis. In this event, seek medical advice from the company doctor or consult a dermatologist. After use, clean the gloves thoroughly with a dry cloth to remove any contaminants. If the gloves are to be re-worn store in such a way that the inside lining of the support can dry out easily.
- Use the gloves not exceed 3 years. The actual usage may depending on individual and work load.

### Constituents / Allergies

- Some gloves may contain ingredients which are known to be a possible cause of allergies in sensitive persons who may develop irritant and/or allergic contact reactions. If an allergic reaction should occur seek medical advice immediately.

**WARNING – THIS PRODUCT MAY CONTAIN NATURAL LATEX WHICH MAY CAUSE AN ALLERGIC REACTION; FOR MORE INFORMATION PLEASE CONTACT US.**

Copyright, all rights reserved.

ACCOLADE SAFETY PTE LTD makes no representations or warranties and there are no conditions with respect to the accuracy, reliability or application of the information herein, its products or the safety or suitability thereof, or results obtained, whether expressed or implied including, without limitation, and implied warranty or fitness for particular purpose. Buyers and users must determine the results to be obtained from the application of the information herein and the safety and suitability of our products for their own purposes, and assumed all risk, responsibility and liability for all injuries, losses or damages arising from the application of the application of the information herein or use of our products, whether or not occasioned by us negligence or based on strict product liability. We neither assume nor authorize any person to assume for it any liability in connection with the use of the information herein or its products.

All information are correct at time of printed and may change without prior notice.