

Datasheet

**Stock No: 121-7825, 121-7826, 121-7827**

## RS PRO Sockets for Miniature Power Relay




### Specifications:

- Comes with metal retaining clip
- Suitable for 121-7804, 121-7806, 121-7807, 121-7808, 121-7809, 121-7810, 121-7811, 121-7812, 121-7813, 121-7814, 121-7815, 121-7816, 121-7817, 121-7818, 121-7819, 121-7820, 121-7821, 121-7822, 121-7823, 121-7824
- 121-7825 – 2 Pole Relay  
121-7826 – 3 Pole Relay  
121-7827 – 4 Pole Relay

<b>RS Stock No</b>	<b>121-7825</b>	<b>121-7826</b>	<b>121-7827</b>
<b>Characteristics</b>	2P	3P	4P
Nominal Load	Current	16A	
	Voltage	300V	
Dielectric Strength	Between Coil and Contact	4000 V/S	
	Between Contacts	2500 V/S	
Max. Tightening Torque	1.2Nm		
Wire Size	20-14 AWG / 0.5-2.5mm <sup>2</sup>		
Ambient Temperature	-40~+85°C		
Unit Weight	46g	62g	78g
Accessories	Metal Retaining Clip		
Certification			

**Dimensions**

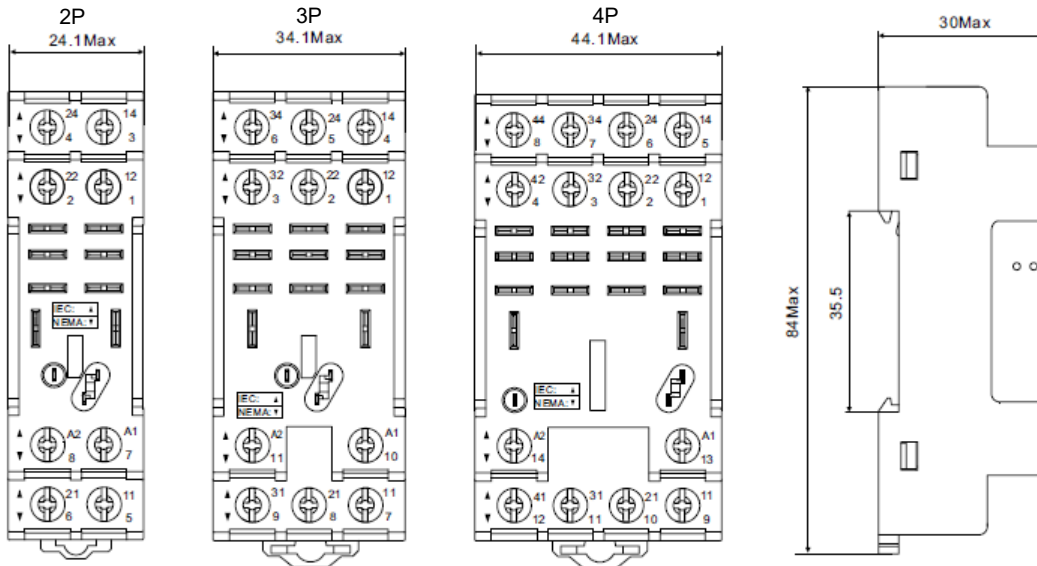

**Connection Diagram**

