



Datasheet


RS PRO 7m DisplayPort Male to Male Cable – Black - Active

Stock number: 236-9088



Our RS PRO 7 metre DisplayPort cable comes with 2 latching, 20 pin male connectors, although only 19 pins are connected, Pin 20 carries 3.3v which traditionally is not used and can cause problems with some devices, this is why only 19 pins are connected on our product.

Manufactured on UL cable UL File Number E301195 UL Style number 20276

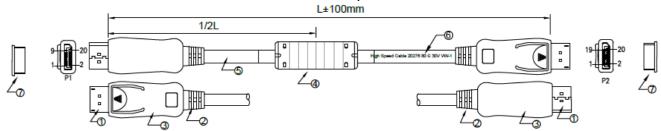

PI	N O	υT
P1		P2
1 —		1
3	ł	3
2	1	2
4	ł	 4
6	1	 6
5	1	5
7	1	 7
9	1	9
8	1	 8
10	IC	10
12	1	12
11	1	11
13	1	13
14	1	14
15	1	15
16	1	16
17	1	17
18]	18
19		19
HELL ——	<u> </u>	SHELL

7	DUST COVER	PE, COLOR: TRANSPARENT	2
6	PRINTING	High Speed Cable 20276 80°C 30V VW-1	
6	CABLE	(1/0.32BC*1P+1/0.32BC+AM)*5C+1/0.32BC*4C+AM+1/0.32BC 160/0.12ALMG+PVC OD:7.0+-0.2MM COLOR: BLACK	L
4	OUTER MOLD	BLACK PVC, IC INSIDE	1
3	OUTER MOLD	BLACK ABS	2
2	OUTER MOLD	BLACK PVC	2
0	CONNECTOR	DP MALE, GOLD PLATED PIN, GOLD PLATED SHELL	2

NOTE:

- 1.Electrical properties:
 - 1.1 Tested by (quantum data)780E handhold test Instrument for DP1.2 21.6G 480P, 720P, 1080P, 4K*2K/60HZ PASS DDC, (EDID), +5V, Hot plug. PASS 1.2 100% PC test pass DP1.2
 - 3840*2160 60HZ RGB/YUV444
 - 2. ROHS 2.0 and REACH

RoHS / REACH / CE / UKCA

rspro.com