

# MANIX Acryl Bending Machine

KOREA

MAN



ABM-500S



ABM-700

Model	ABM-500S	ABM-700
Heating capacity length	500 mm	700 mm
Wire thickness	Ø 0.9 mm	Ø 0.9 mm
Heating type	Nichrome wire	Nichrome wire
Power	AC 220~240V(50/60Hz) 150W	AC 220~240V(50/60Hz) 140W
Dimensions	580 x 275 x 125 mm	850 x 410 x 220 mm
Weight	8 kg	10 kg

MODEL	Effective Length (mm)	Voltage (V)	Max. Output (Watt)	Temperature (°C)	Max. Bending Thickness (mm) PVC Acrylic	
W-10 AW-10	3000	100	900	0~230	4	3
W-8 AW-8	2400	100	600	0~230	4	3
W-6 AW-6	1800	100	500	0~230	4	3
W-4 AW-4	1200	100	400	0~230	4	3
W-2 AW-2	600	100	100	0~230	4	3

- ⊙ Operates on low voltage to secure electrical stability
- ⊙ Straight bar and gradation on the table enable accurate repeatable operation
- ⊙ Heating level can be adjusted for different thicknesses of the materials
- ⊙ Alarm notifies the bending moment
- ⊙ Internal bimetal minimizes overheating and damages


# MANIX Hot Wire Foam Cutting Machine

MAN




HCM-2S

HCM-2S (No. 41) Specification	
Table size	560 x 315mm
Hotwire height	210mm
Hotwire angle adjustment	(Forwards and backwards) 45° (Left) 45° (Right) 20°
Hotwire size	Ø0.18mm (Nichrome wire)
Input power	Single phase 220V 50/60(Hz)
Output power	0~13V (Stepless adjustment)
Dimensions	700 x 335 x 375 mm
Weight	8.0Kg



Inclined cutting by adjusting the angle of the hot wire

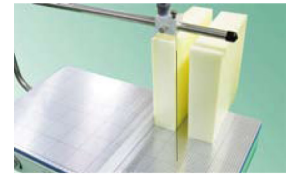

Straight line cutting of a thick material using a angle square

- ⊙ The work table can be extended to maximize the work space.
- ⊙ The nichrome wire can be adjusted in its angle, making it easy to adjust the angle of the cut surface.
- ⊙ Angled cutting is possible using the angle block.
- ⊙ Precise cutting is possible through the 0.18mm hot wire.


# WINNING Plastic Welding & Bending Machine JAPAN

WIN

NT-WJ25S  
Hot-Jet Welder  
with one  
K-1 Gun




750 watt

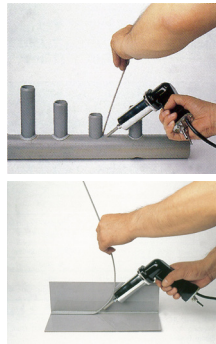


## Type 11 Tubular Heater

Equipped with Voltage regulator, temperature control, Max. 5mm

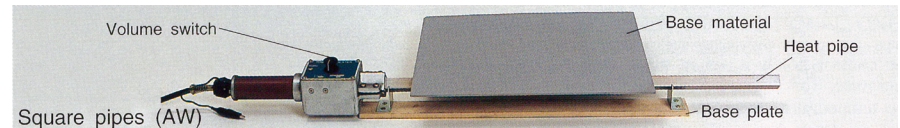

Square pipes (AW)

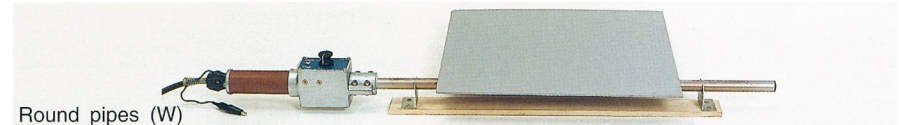


Round pipes (W)

# WU HSING & BLUEBERRY Plastic Bag Sealer

WUH

TAIWAN

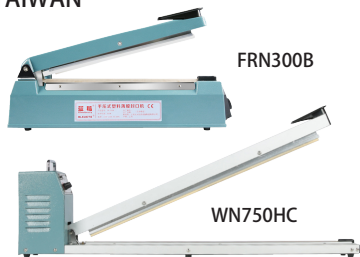

FRN300B

## Hand Type Impulse Sealer

Description: Hand sealer is ideal for a multitude of applications. Makes excellent air and water tight sealing on different materials.



WN750HC

Model	Voltage	Power	Max sealing	Weight
FRN300B	220V	800W	300×8mm	4.3kg
FRN600		400W	600×3mm	6kg
FRN800		500W	800×3mm	8kg
W300H		380W	300×2mm	3.8kg
WO520H		600W	520×2mm	6kg
WN750HC		1200W	750×2.7mm	12kg

## Foot Type Impulse Sealer

Description: Foot sealer with aluminium casting, is ideal for sealing large heavy bags. Foot sealers keep both hands free for quicker and more accurate sealing.



Model	PS350	PS650	W600
Voltage	220V		
Heating side	Upper and lower		Lower
Power	1200W	2000W	800W
Max sealing	350×8mm	650×8mm	600×2.7~5mm
Weight	21kg	34.5kg	25kg