




This drawing is copyright. No part of this work may be copied, reproduced, altered or amended, stored in a retrieval system, or transmitted in any form or by any means without the prior permission in writing of the copyright owner.

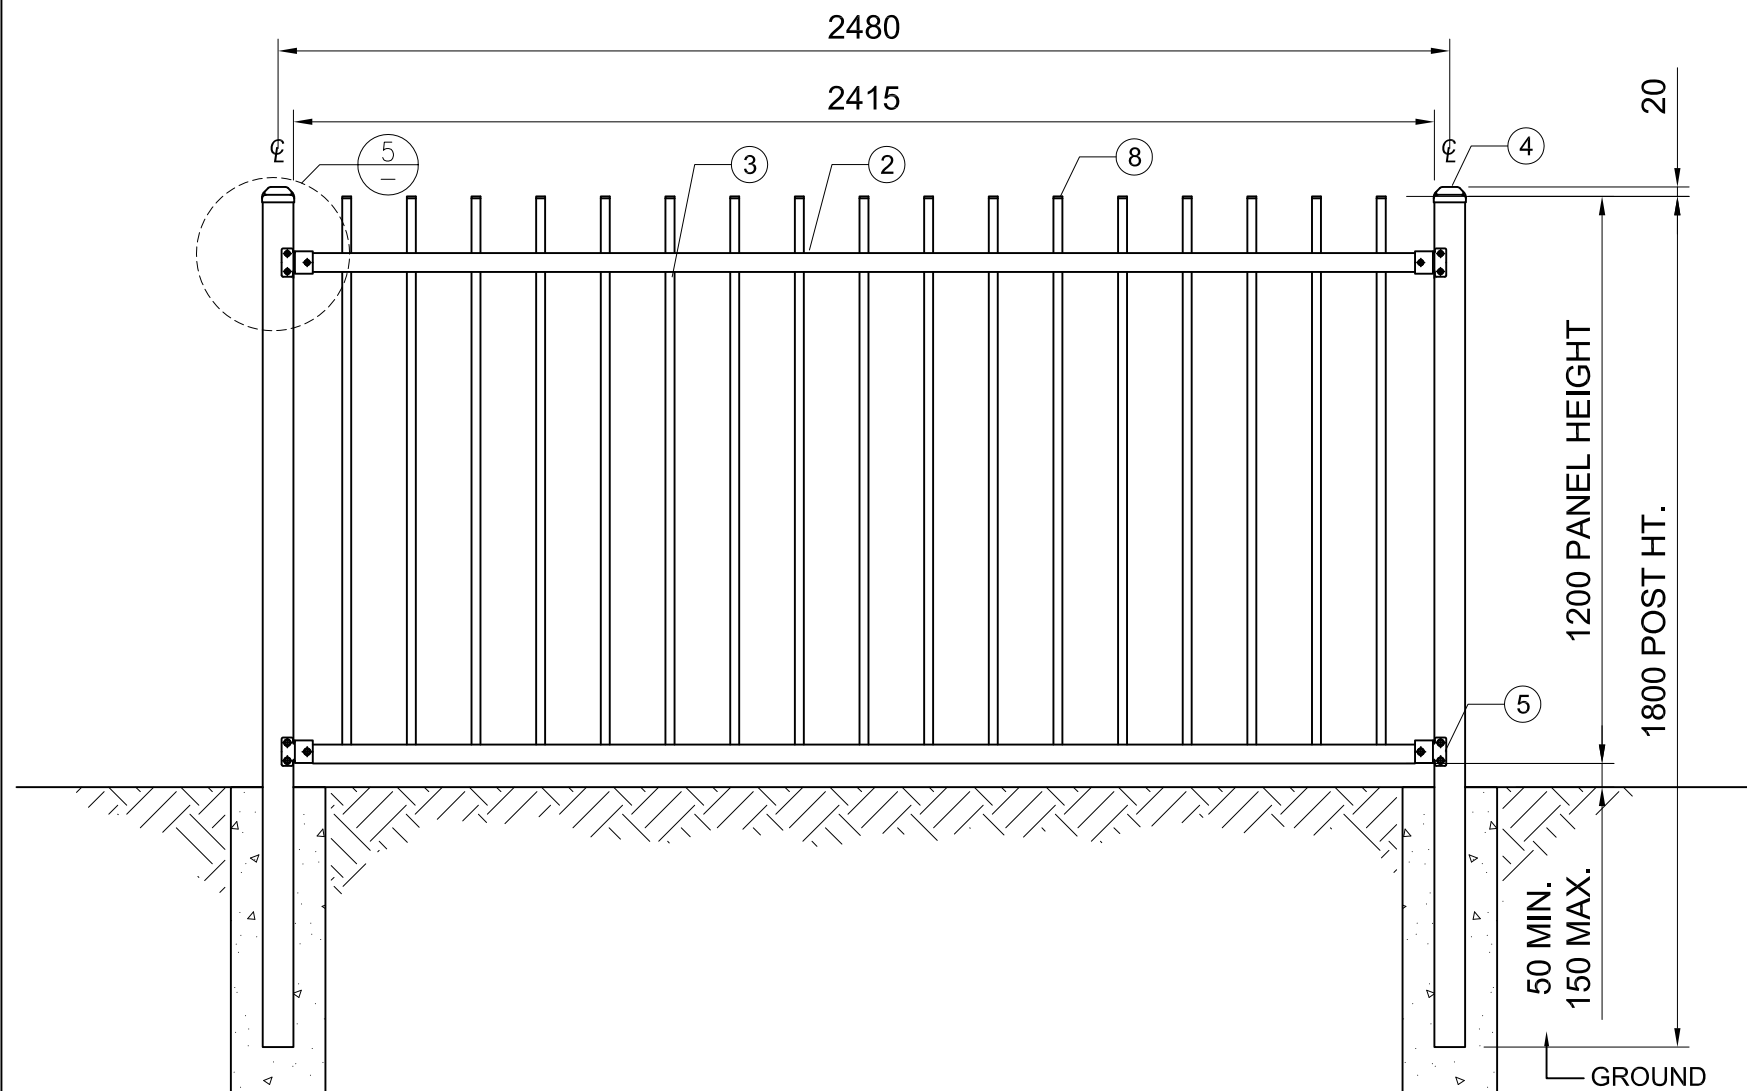


FRONT VIEW
(INSIDE PROPERTY)
SCALE 1:16

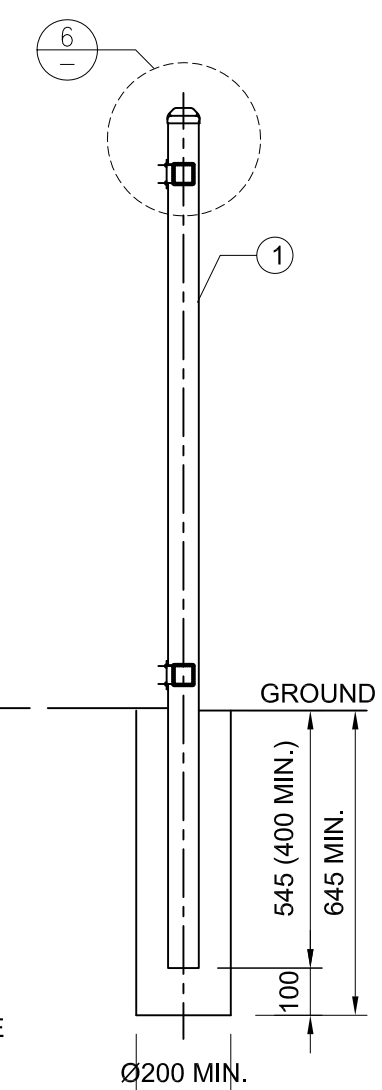

SECTION
SCALE 1:20

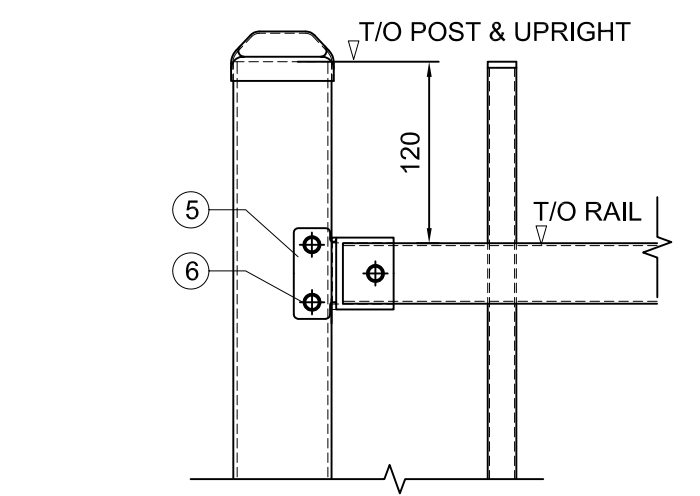

PANEL TO POST FIXING DETAIL
SCALE 1:5

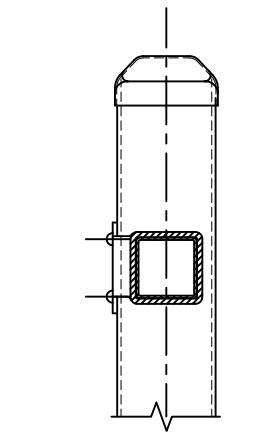

DETAIL
SCALE 1:5

GENERAL NOTES

1. CONCRETE FOOTINGS:- 20MPa MINIMUM.
2. SCREWS TO I/SIDE OF FENCE, UNLESS BRACKET RESTRICTED.
3. ALL WELDS SILICON BRONZE

* GENERAL NOTES
- ALL WELDS TO BE SILICON BRONZE.

BILL OF MATERIALS

ITEM	DESCR.	QTY.	SPEC.	MASS (ea)
1	POST	2	65 x 65 x 1.6mm SHS x 1800mm LG	14.93
2	RAIL	2	40 x 40 x 1.6mm SHS x 2400mm LG	-
3	UPRIGHT	17	Ø19 1.2mm CHS x 1200mm LG	-
4	POST CAP	2	65 x 65 STEEL CAP	0.08
5	RAIL BRACKET	4	BLUEDOG SECURITY BRACKET	0.15
6	SCREW	12	PENTAFORCE ANTI TAMPER SELF DRILLING TEX SCREW 12G	-
7	PANEL 2400	1	(REF. DWG. "89-19o-ROT-01")	41.53
8	UPRIGHT CAP	17	Ø19 PLASTIC CAP INSERTS	-

BLUEDOG FENCES AUSTRALIA
ph. (02) 9859 6700
f. (02) 9888 5533
bluedogfences.com.au

DRAWN	J.H.	25-01-14	APPROVAL STATUS cad DO NOT AMEND MANUALLY
REVIEWED	S.B.	25-01-14	
APPROVED	S.B.	25-01-14	
SCALE:	1:16, 1:5	@ A3	

© Bluedog Fences Australia Pty Ltd.		
CROWDTUFF® ROD TOP Ø19 ROUND 1200 HT. x 2400 LTH. TYPICAL ASSEMBLY		
A3	89-19o-ROT -12	-
CODE	SHEET	AMDT