

Project Name


Qty

Type

Catalog / Part Number



ADA compliant

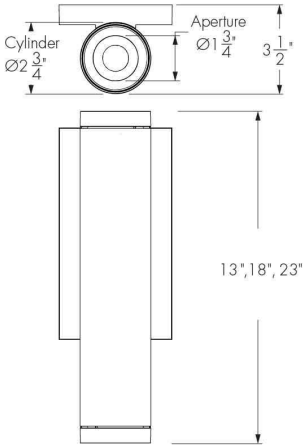

Top view

Front view

Photometric Summary


Based on Narrow Optic (Nominal 25°),
MRGBWP in Optidrive™ (White 3000K CRI 96+)

Nominal output [lm]	Delivered output [lm]	Power (120V) [W]	Efficacy [lm/W]	Power (277V) [W]	Efficacy [lm/W]
700	596	14	43	14	43

1. Consult website for latest IES files.

2. Photometric performance is measured in compliance with IESNA LM-79-24.

Optics

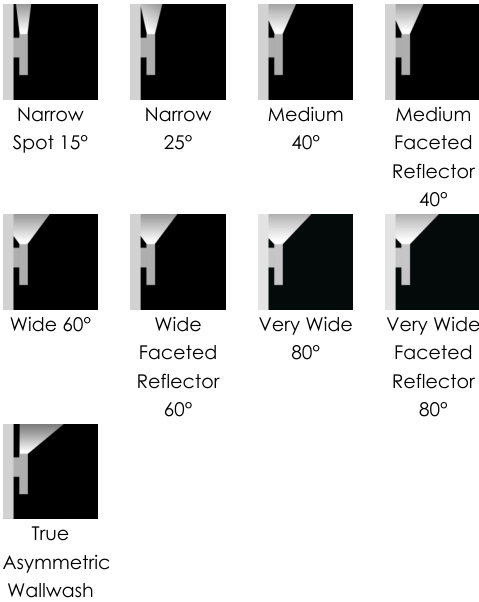

Description

The Lumencore Cylinder Opticolor+ Nano Wall Mount Indirect is a high-performance LED luminaire designed for commercial, residential, or hospitality environments. This versatile three-in-one fixture combines Dynamic RGBW Colors, Dynamic White with Dim-to-Warm, and Premium Static White, delivering the exceptional quality and precision Lumenpulse is known for. Available in a variety of finishes—or custom color options—it adapts beautifully to any space. Accessories, beam angle, and optics can be easily adjusted in the field for on-site flexibility.

Features

Mounting	Wall mount (ADA compliant)
Light Direction	Indirect lighting
Length	13 in, 18 in, 23 in
Indirect Lighting Output (Nominal Lumens)	700lm, 1000lm
Indirect Lighting Color Temperature	Opticolor+™ Mix-at-Source Red, Green, Blue Plus White Settable Range 22K to 65K, Opticolor+™ Mix-at-Source Red, Green, Royal Blue Plus White Settable Range 22K to 65K
Indirect Lighting Optics (Nominal Distribution)	Narrow Spot 15°, Narrow 25°, Medium 40°, Medium Faceted Reflector 40°, Wide 60°, Wide Faceted Reflector 60°, Very Wide 80°, Very Wide Faceted Reflector 80°, True Asymmetric Wallwash
Optical Accessories	Snoot, Half Snoot, Honeycomb Louver, Concentric Ring Louver, Clear Glass Lens, Softening Glass Lens, Prismatic Diffuser, Linear Spread Lens Narrow (1° x 40°), Linear Spread Lens Wide (1° x 60°), Beam Widening Lens (+10°), Beam Widening Lens (+20°), Beam Widening Lens (+30°), Decorative Ring
Warranty	5-year limited warranty

Color and Color Temperature



opticolor+™
Opticolor+™
Mix-at-Source
Red, Green,
Blue Plus White
Settable
Range 22K to
65K



opticolor+™
Opticolor+™
Mix-at-Source
Red, Green,
Royal Blue Plus
White Settable
Range 22K to
65K

Control

DMX/RDM

Color Rendering

CRI
90+

Finish



Matte
White



Matte
Black



Matte
Brown



Matte
Orange



Matte
Green



Matte
Blue



Matte
Silver



Glossy
White



Glossy
Black



Glossy
Yellow



Glossy
Red



Glossy
Violet



Glossy
Green



Glossy
Ivory



Concrete
Gray



Metalized
Gray



Italian
Brick Red



Parget
White



Custom
Color &
Finish

Performance

Maximum Delivered Output	Up to 851 lm Very Wide Faceted Reflector Optic 80°, MRGBWP Optidrive™ Enabled (White 3000K 96+ CRI, DMX/RDM) Up to 889 lm Very Wide Faceted Reflector Optic 80°, MRGBWP Optidrive™ Enabled (White 4000K 95+ CRI, DMX/RDM)
Maximum Delivered Intensity	Up to 3,153 cd Narrow Spot Optic 15°, MRGBWP Optidrive™ Enabled (White 3000K CRI 96+, DMX/RDM) Up to 3,191 cd Narrow Spot Optic 15°, MRGBWP Optidrive™ Enabled (White 4000K CRI 95+, DMX/RDM)
Color Consistency	3 SDCM (in white light color temperatures)
Color Rendering	CRI 90+ (White Light Only)
Lumen Maintenance	L95 55,000 hrs L70 225,000 hrs

Physical

Weight	Up to 4.75 lbs
Housing Material	Aluminum
TIR Optics Material	Clear polycarbonate
Reflector Material	Aluminum

Electrical and Control

Voltage	120-277 Volts Universal
Control	DMX/RDM Enabled Dimming 0.1%

Environmental

Environment	Damp location (interior applications only)
Operating Temperature	-4 °F to 86 °F
Ingress Protection Rating	IP20

Accessories (Order Separately)

Control Boxes	DMX/RDM enabled (Daisy Chain or Star Configuration), Ethernet enabled (Daisy Chain or Star Configuration)
Control Systems	Pharos® Designer Lighting Control Kit (PHAROS), Pharos® Expert Control Kit (EXPERT), Consult Control Systems section for details
Diagnostic and Addressing Tools	LumenID (LID)

Important

Virtual Patent Marking Notice

This website (<https://www.lmpg.com/patents-trademarks>) is provided to satisfy the virtual patent marking provisions of applicable jurisdictions. Some products listed may be covered by additional patents not referenced here.

Certifications












Fixture Dimension (ADA Compliant)

13 in

18 in

23 in

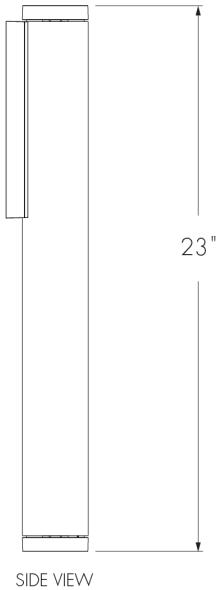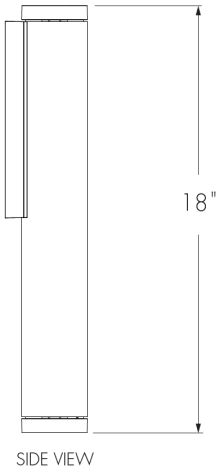
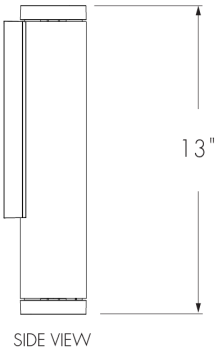



Mounting Bracket Details (ADA compliant)

Fixture 13 in

Fixture 18 in



Fixture 23 in

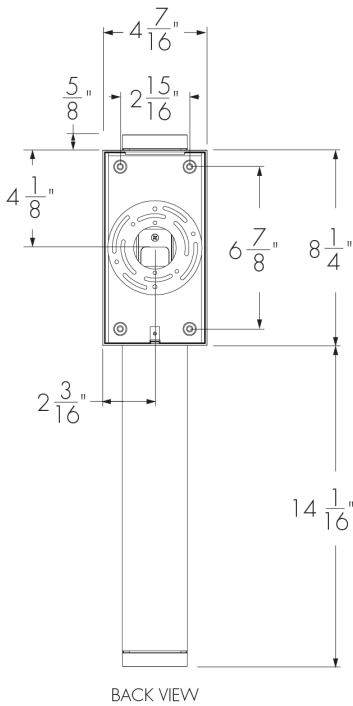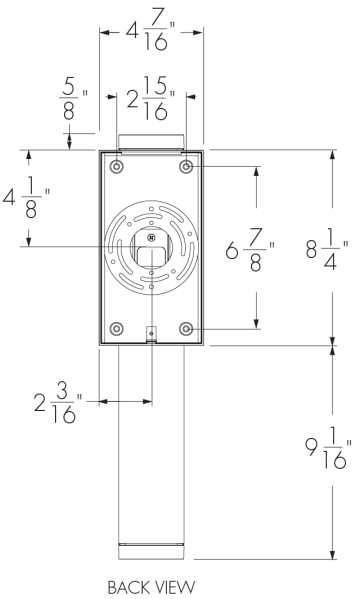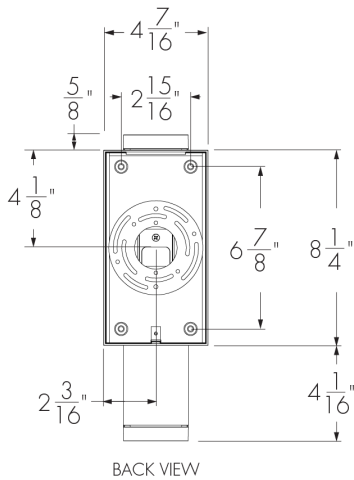

Optical Accessory Dimensions (13 in Fixture Shown)

Snoot

Half Snoot

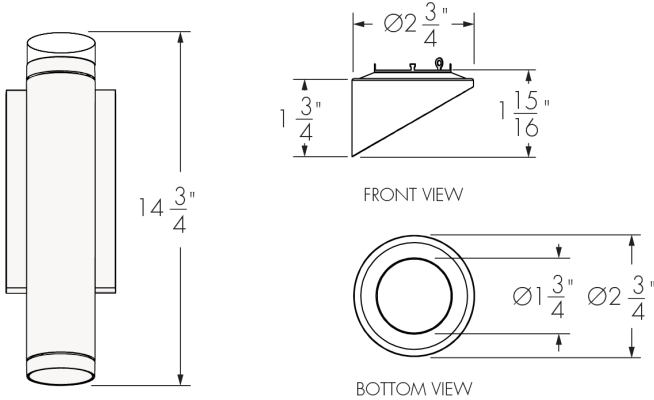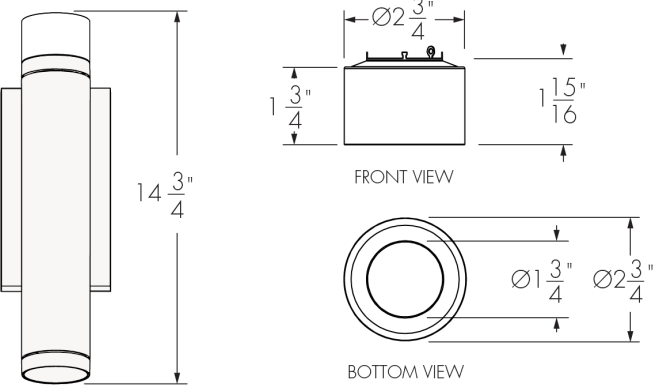

Photometric Information - Color Rendering Options Comparison, 3000K

Color sample	Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
CRI 90+	94	95	98	99	95	94	97	91	80	55	93	97	83	96	99	89

Optics

TIR Optic
NS/N



Semi-Specular Reflector
M/W/VW



Faceted Reflector
NFR/MFR/WFR/VWFR



Power Consumption

MRGBWP and MRGRBWP


Power Consumption [W]				
Output [lm]	NS (15°) - N (25°) - WW		M (40°) - MFR (40°) - W (60°) - WFR (60°) - VW (80°) - VWFR (80°)	
	120 V	277 V	120 V	277 V
700	14	14	11	11
1000	N/A	N/A	16	16

Power Consumption values are based on a MRGBWP or MRGRBWP Full On configuration.

Photometric Information - Indirect Lighting Optics


W - Wide (Nominal 60°), 4000K

Nominal output [lm]	Delivered output [lm]†					
	Full On	Red	Green	Blue	White 30K CRI 96+	White 40K CRI 95+
700	481	301	562	143	475	496
1000	775	423	767	202	766	800

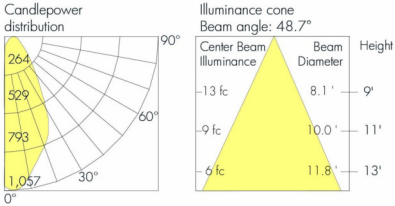


WFR - Wide Faceted Reflector (Nominal 60°), 4000K

Nominal output [lm]	Delivered output [lm]†					
	Full On	Red	Green	Blue	White 30K CRI 96+	White 40K CRI 95+
700	519	325	607	154	513	535
1000	837	456	828	218	827	864

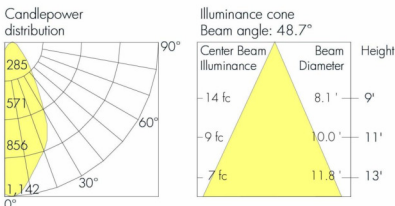


VW - Very Wide Reflector (Nominal 80°), 4000K

Nominal output [lm]	Delivered output [lm]†					
	Full On	Red	Green	Blue	White 30K CRI 96+	White 40K CRI 95+
700	494	310	578	147	488	510
1000	797	434	788	208	788	823

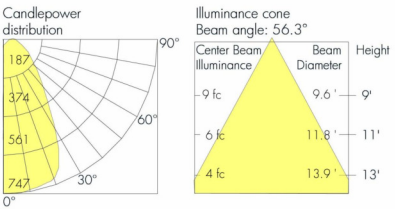

VWFR - Very Wide Faceted Reflector (Nominal 80°), 4000K


Nominal output [lm]	Delivered output [lm]†					
	Full On	Red	Green	Blue	White 30K CRI 96+	White 40K CRI 95+
700	534	335	624	159	527	551
1000	861	469	852	225	851	889

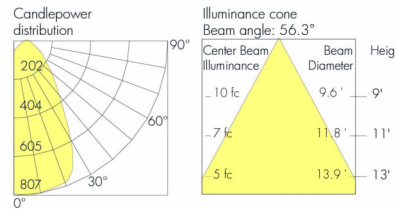

† Consult website for latest IES files. Delivered output: +/- 10% tolerance.
Photometric performance is measured in compliance with IESNA LM-79-24.


NS - Narrow Spot (Nominal 15°), 4000K

Nominal output [lm]	Delivered output [lm]†					
	Full On	Red	Green	Blue	White 30K CRI 96+	White 40K CRI 95+
700	602	307	503	123	595	621

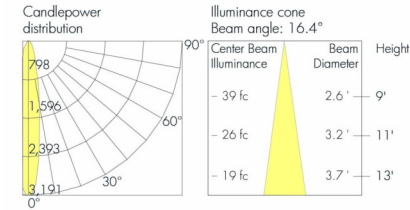


N - Narrow (Nominal 25°), 4000K

Nominal output [lm]	Delivered output [lm]†					
	Full On	Red	Green	Blue	White 30K CRI 96+	White 40K CRI 95+
700	603	308	504	124	596	623

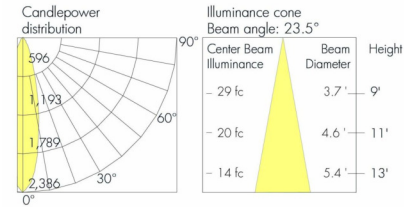


M - Medium (Nominal 40°), 4000K

Nominal output [lm]	Delivered output [lm]†					
	Full On	Red	Green	Blue	White 30K CRI 96+	White 40K CRI 95+
700	435	273	509	129	430	449
1000	702	383	694	183	694	725

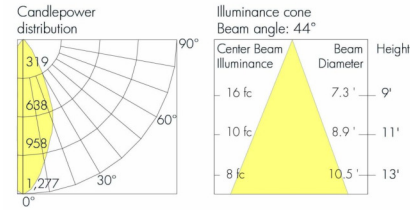

MFR - Medium Faceted Reflector (Nominal 40°), 4000K

Nominal output [lm]	Delivered output [lm]†					
	Full On	Red	Green	Blue	White 30K CRI 96+	White 40K CRI 95+
700	470	295	549	140	464	485
1000	758	413	750	198	749	782

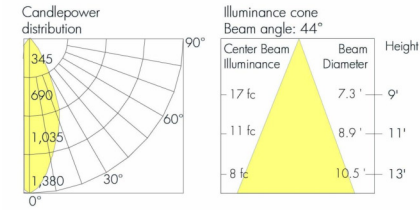


† Consult website for latest IES files. Delivered output: +/- 10% tolerance.
Photometric performance is measured in compliance with IESNA LM-79-24.

TM-30


2700K - CRI 90+

CRI 90+				
CCT	CIE		TM-30	
2700K	R _a	90	92	R _f
	R ₉	76	107	R _g




3000K - CRI 90+

CRI 90+				
CCT	CIE		TM-30	
3000K	R _a	96	91	R _f
	R ₉	94	98	R _g




3500K - CRI 90+

CRI 90+				
CCT	CIE		TM-30	
3500K	R _a	97	94	R _f
	R ₉	83	99	R _g




4000K - CRI 90+

CRI 90+				
CCT	CIE		TM-30	
4000K	R _a	95	90	R _f
	R ₉	97	97	R _g



5000K - CRI 90+

CRI 90+				
CCT	CIE		TM-30	
5000K	R _a	91	88	R _f
	R ₉	78	97	R _g



Refer to TM-30 Reference Guide for details.

Optical Accessories

SN - Snoot



LACYN - SN

XLVR - Concentric Ring Louver



LACYN- XLVR

PD – Prismatic Diffuser



LACYN - PD

HSN - Half Snoot



LACYN - HSN

CL - Clear Glass Lens




LACYN - CL

LSN - Linear Spread Lens Narrow (1° x 40°)




Horizontal Beam Distribution



Vertical Beam Distribution


LACYN - LSN

BW2 - Beam Widening Lens (+20°)



LACYN - BW2

HL - Honeycomb Louver



LACYN - HL

SL - Softening Glass Lens




LACYN - SL

LSW - Linear Spread Lens Wide (1° x 60°)




Horizontal Beam Distribution



Vertical Beam Distribution

LACYN - LSW

BW3 - Beam widening lens (+30°)



LACYN - BW3


DR - Decorative Ring



LACYN - DR

Typical Wiring Diagrams (Refer to Installation Instructions for Additional Wiring Details)


Daisy Chain Layout (DMX/RDM)

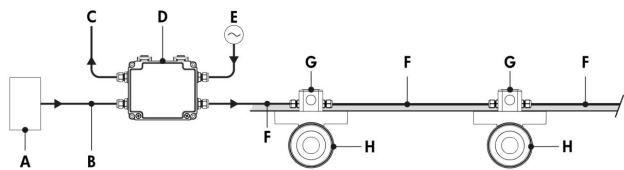

- A - DMX/RDM controller (to be ordered separately from Lumenpulse, or by others)
- B - Data input (Belden 9841 or equivalent, by others)
- C - Data output to next CBX (optional, non-isolated/non-booster)
- D - CBX-DS
- E - Power line (120-277V AC, wiring by others)
- F - Power and data output to fixture (wiring by others)
- G - 4 in Octagonal/round junction box (by others)
- H - Lumencore Cylinder Nano Wall Mount

The DMX/RDM protocol states a maximum of 64 DMX/RDM enabled fixtures on any single run.
Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
Maximum of 1 output per CBX-DS.
Each fixture requires 1, 2, 3, 4, or 5 DMX addresses depending on control mode selected onsite.
DMX terminator is required at the end of each run to maintain data integrity. Two (2x) DMX lumenterminators included per CBX-DS. See installation instructions for details.

Star Layout (DMX/RDM)

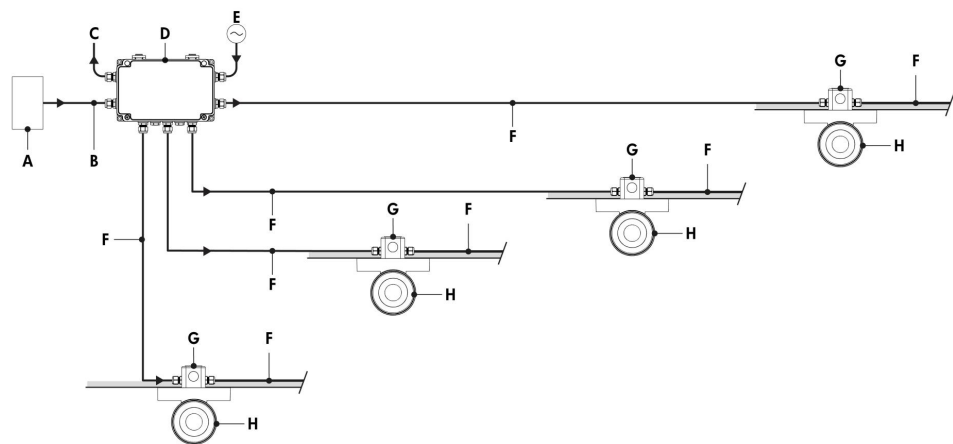


- A - DMX/RDM controller (to be ordered separately from Lumenpulse, or by others)
- B - Data input (Belden 9841 or equivalent, by others)
- C - Data output to next CBX (optional, non-isolated/non-booster)
- D - CBX-ST
- E - Power line (120-277V AC, wiring by others)
- F - Power and data output to fixture (wiring by others)
- G - 4 in Octagonal/round junction box (by others)
- H - Lumencore Cylinder Nano Wall Mount

The DMX/RDM protocol states a maximum of 64 DMX/RDM enabled fixtures on any single run.
Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
Maximum of 6 outputs per CBX-ST.
Each fixture requires 1, 2, 3, 4, or 5 DMX addresses depending on control mode selected onsite.
DMX terminator is required at the end of each run to maintain data integrity. Six (6x) DMX lumenterminators included per CBX-ST. See installation instructions for details.


Control Boxes (Order Separately)

CBX-DMX/RDM - DMX/RDM Enabled (Daisy Chain or Star Configuration)

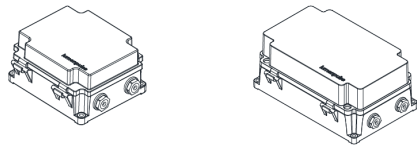

DMX/RDM control box. Up to six power and data outputs to fixtures or fixture runs. Consult CBX specification sheet and installation instructions for details. Lumenterminators provided with CBX (2x for Daisy Chain configuration, 6x for Star configuration), consult factory to order spares.

CBX-ENET - Ethernet Enabled (Daisy Chain or Star Configuration)

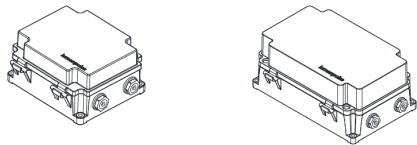

Ethernet control box. Up to four power and data outputs to fixture or fixture runs. Consult Ethernet CBX specification sheet and installation instructions for details.

Control Systems (Order Separately)

PHAROS - Pharos® Designer Lighting Control Kit



The Pharos Designer Lighting Control Kit, available for 1 or 2 DMX universes, allows for complete control of large lighting installations.

EXPERT - Pharos® Expert Control Kit



The Pharos Expert Control Kit, available for 1, 2, 4 or 6 DMX universes, allows for complete control of large lighting installations.

Diagnostic And Addressing Tools (Order Separately)

LID - LumenID



The updated LumenID (LID) is an all-in-one diagnostic and addressing solution for both DMX/RDM and Lumentalk (LT) systems. Engineered for versatility, it streamlines commissioning and troubleshooting across protocols—no need for multiple tools. Cable option may vary; please consult factory. For complete details, refer to the LID specification sheet.

How to Order

Housing ⁽¹⁾	Certification	Mounting	Light Direction	Voltage	Length	Indirect Lighting Output (Nominal Lumens)	Indirect Lighting Color Temperature ⁽³⁾	Indirect Lighting Color Rendering	Indirect Lighting Optics (Nominal Distribution)
LACYN Lumencore Cylinder Nano - Ø2 3/4 in	A UL/cUL	WM Wall mount (ADA compliant)	I Indirect lighting	120/277 120-277 Volts Universal	13 13 in 18 18 in 23 23 in	IL07 700lm IL10 1000lm ⁽²⁾	MRGBWP Opticolor+™ Mix-at-Source Red, Green, Blue Plus White Settable Range 22K to 65K ^{(4) (5)} MRGRBWP Opticolor+™ Mix-at-Source Red, Green, Royal Blue Plus White Settable Range 22K to 65K ^{(5) (6)}	CR90 CRI 90+ (White Light Only)	NS Narrow Spot 15° ⁽⁷⁾ N Narrow 25° ⁽⁷⁾ M Medium 40° MFR Medium Faceted Reflector 40° W Wide 60° WFR Wide Faceted Reflector 60° VW Very Wide 80° VWFR Very Wide Faceted Reflector 80° WW True Asymmetric Wallwash ^{(7) (8) (9)}

Notes:

1. Refer to website product configurator for all exceptions.

2. Not available with NS, N and WW optics.

3. White Channel Set Point or Warm Dimming Range is adjustable at commissioning. Consult Opticolor+ Personality Guide for details.

4. CRI 90 applies only to white light color temperatures from 2700K to 5000K.
5. Fixtures are shipped from the factory in Optidrive™ Mode. Normal Mode can be activated onsite for DMX/RDM fixtures. For DMX/RDM applications, Optidrive Mode requires a LumenID, LumenID software and onsite commissioning. Additionally, with Opticolor+™ the white CCT is configurable in the field from 2200K-8000K.

6. CRI 90 applies only to white light color temperatures from 2700K to 6500K.

7. Available up to 700 lumens.

8. Accessories not available for WW optic.

9. The color of the true asymmetric wallwash baffle matches the fixture bezel.

How to Order

Indirect Lighting Control	Indirect Lighting Accessories ⁽⁶⁾ ⁽¹²⁾ ⁽¹³⁾	Finish	Bezel	Bezel Finish
DMX/RDM DMX/RDM Enabled Dimming 0.1% ⁽¹⁰⁾ ⁽¹¹⁾	NA No Accessory	MWH Matte White	b Bezel	MWH Matte White
	SN Snoot ⁽¹⁴⁾	MBK Matte Black		MBK Matte Black
	HSN Half Snoot† ⁽¹⁴⁾	MBR Matte Brown		MBR Matte Brown
	HL Honeycomb Louver ⁽¹⁵⁾	MOR Matte Orange		MOR Matte Orange
	XLVR Concentric Ring Louver ⁽¹⁶⁾ ⁽¹⁷⁾	MGR Matte Green		MGR Matte Green
	CL Clear Glass Lens	MBL Matte Blue		MBL Matte Blue
	SL Softening Glass Lens	MSI Matte Silver		MSI Matte Silver
	PD Prismatic Diffuser ⁽¹⁸⁾	GWH Glossy White		GWH Glossy White
	LSN Linear Spread Lens Narrow (1° x 40°) ⁽¹⁹⁾ ⁽²⁰⁾	GBK Glossy Black		GBK Glossy Black
	LSW Linear Spread Lens Wide (1° x 60°) ⁽²⁰⁾ ⁽²¹⁾	GYL Glossy Yellow		GYL Glossy Yellow
	BW1 Beam Widening Lens (+10°) ⁽²⁰⁾	GLR Glossy Red		GLR Glossy Red
	BW2 Beam Widening Lens (+20°) ⁽²⁰⁾	GVI Glossy Violet		GVI Glossy Violet
	BW3 Beam Widening Lens (+30°) ⁽²⁰⁾	GGR Glossy Green		GGR Glossy Green
	DR Decorative Ring ⁽²²⁾	GIY Glossy Ivory		GIY Glossy Ivory
		CGY Concrete Gray		CGY Concrete Gray
		MLG Metalized Gray		MLG Metalized Gray
		IBR Italian Brick Red		IBR Italian Brick Red
		PWH Parget White		PWH Parget White
		CC Custom Color & Finish ⁽²³⁾		CC Custom Color & Finish ⁽²³⁾

Notes:

8. Accessories not available for WW optic.

10. A Control Box (CBX-DS or CBX-ST) and lumenID (LID) must be specified.

11. Configurable to 3, 4, or 5 channel control via RDM in the field.

12. Accessories specified in the fixture code are factory installed but can also be changed in the field. Refer to installation instructions for details. To order accessories separately, refer to the Optical Accessories section of the specification sheet.

13. Maximum of two lenses can be installed per fixture. The Snoot (SN) or Half Snoot (HSN) can be combined with any accessory. The Clear Glass Lens (CL) and Softening Glass Lens (SL) cannot be combined together. The Linear Spread Lenses (LSN and LSW) are compatible with the Snoot and Half Snoot accessories only.

14. Matte black interior surface, exterior finish matches housing color.

15. When combined with another accessory, the HL will be factory-installed in second position (furthest from the LED source).

16. Available for NS optic only.

17. Can be combined with PD accessory only.

18. Recommended to be combined with HL or XLVR accessory only.

19. Nominal 10° x 40° distribution when used with the NS optic.

20. For optimal performance, it is not recommended to mix with other accessories.

21. Nominal 10° x 60° distribution when used with the NS optic.

22. No other accessories can be combined with the decorative ring accessory. A decorative ring replaces the bezel on a fixture. Do not specify a bezel finish.

23. Longer lead times can be expected