


PRODUCT DATASHEET FOR WIRE ROPE GRIP

A wire rope grip (also known as a wire rope clip or clamp) is a mechanical fitting used to secure the loose end of a wire rope after forming a loop or eye. It is commonly applied in rigging, lifting, hoisting, and towing operations where splicing or swaging is not practical.

Product Features

- **Firm Grip** – Clamps the loose end of a wire rope securely after forming a loop or eye.
- **Strong & Durable** – Forged steel construction for heavy-duty use.
- **Rust Protection** – Hot-dip galvanized for corrosion resistance in harsh environments.
- **Easy Installation** – Quick setup without special tools: tighten nuts to secure.

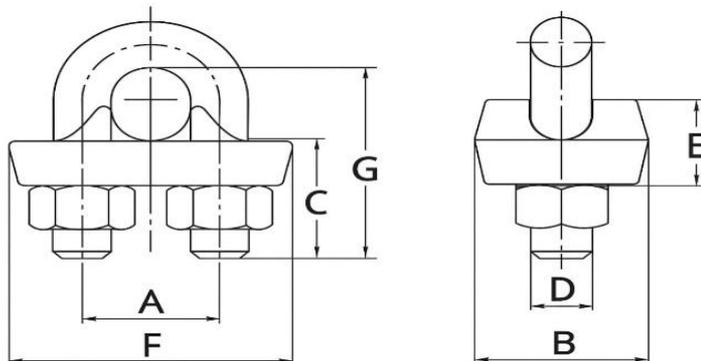

TECHNICAL PARAMETERS

WIRE ROPE CLIP- HOT DIP GALVANISED

Rope Dia Inches	A mm	B mm	C mm	D mm	E mm	F mm	G mm	Tolerance
1/4	19	29	15	5/16	16	36	26	±5%
5/16	22	33	19	3/8	18	43	35	±5%
3/8	27.5	41	20	7/16	23	49	38	±5%
1/2	30	48	25	1/2	28	58	47	±5%
5/8	33	52	32	9/16	34	63	60	±5%
3/4	38	57	36	5/8	35	72	70	±5%
7/8	44	62	41	3/4	40	80	79	±5%
1	48	66	45	3/4	45	88	89	±5%
1 1/8	51	71	51	3/4	48	91	98	±5%
1 1/4	59	80	56	7/8	56	105	108	±5%
1 3/8	60	80	56	7/8	59	106	118	±5%
1 1/2	66	87	60	7/8	62	113	125	±5%
1 3/4	78	97	70	1-1/8	74	133	146	±5%
2	86	113	76	1-1/4	83	149	164	±5%
2 1/4	98	115	81	1-1/4	81	160	181	±5%
2 1/2	105	103	87	1-1/4	94	168	195	±5%
2 3/4	111	127	90	1-1/4	124	175	211	±5%
3	120	135	98	1-1/2	113	193	252	±5%