

# 3100 Refrigerator Door Switches Splashproof



E3102AA - - -



E3111BA - - -

- ▶ Door switches
- ▶ Ratings up to 5A, 250V ac
- ▶ Splashproof
- ▶ Changeover, momentary ON and momentary OFF
- ▶ Choice of actuators



5A 250Vac 25T85 5E4 (50,000 Operations)



UL CSA 5A 250Vac  
UL 85°C, file E45221, CSA file LR10990

*In house test*

200W 250Vac Lampload (1,000,000 operations)



RoHS compliant

μ contact gap.  
Technical data on pages 4 & 5.  
Sealed terminals option available. Call sales for details.

## E 3102 A A - - -


TERMINAL FUNCTION ACTUATOR BODY COLOUR, ETC

▶ TERMINAL	▶ FUNCTION	▶ ACTUATOR	▶ BODY	▶ OPTIONS
<p><b>E</b></p> <p>4.8 x 0.5</p> <p>For sealed terminals call sales</p>	<p><b>3101</b></p> <p>ON - OFF (momentary ON)</p> <p><b>3102</b></p> <p>ON - OFF (momentary OFF)</p> <p><b>3111</b></p> <p>ON - ON (momentary 1 side)</p>	<p><b>A</b></p> <p>17.6 max</p> <p><b>B</b></p> <p>15.6 max</p> <p><b>C</b></p> <p>23.0 max</p> <p><b>D</b></p> <p>17.1 max</p>	<p><b>A</b></p> <p>Panel cut-out Panel thickness 1.0 - 2.5mm</p>	<p><b>Finish</b> Gloss finish only</p> <p><b>Colour</b> White is standard</p> <p>Call sales for custom colours. A full range is available for large orders.</p>

### Dimensions (mm) ("A" actuator shown)

- 3101** uses terminals 1,2
- 3102** uses terminals 1,2
- 3111** uses terminals 1,2,3

For details of actuator travel and switching angles call sales.

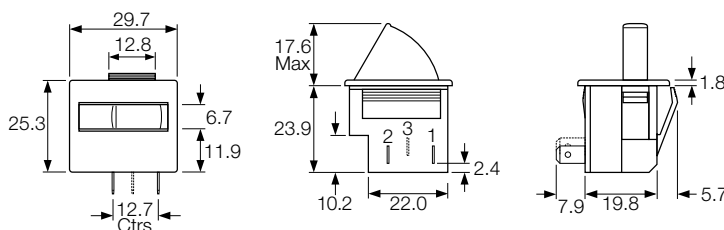

refrigerator switches