RF Single Color Remote Controller

09.2807S.04134
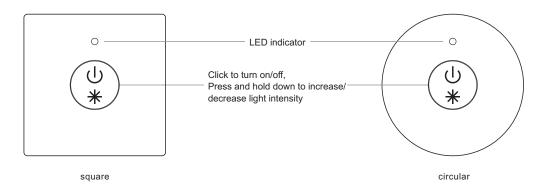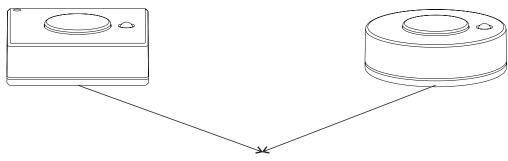
FC CE RoHS COMPLIANT UL TÜV

Important: *Read All Instructions Prior to Installation*

Function introduction

LED indicator

Click to turn on/off,
Press and hold down to increase/
decrease light intensity

square

circular

Front side

If the remote is out of power,
you can open the back cover and replace the battery(CR2025).

Back side

Product Data

Output	RF signal
Operation Frequency	868/915/434MHz
Power Supply	3V(CR2025 battery)
Operating temperature	0-40°C
Relative humidity	8% to 80%
Dimensions	32x32x9.8mm

• Control 1 zone
• Single color controller
• Memory Function
• Compatible with all universal series RF receivers
• 1 receiver can be paired by max 8 different remote controls.
• Waterproof grade: IP20

Safety & Warnings

• This device contains a button lithium battery that shall be stored and disposed properly.
• DO NOT expose the device to moisture.

Operation

1. Pair with RF receivers:

Click "Learning Key" on RF receiver → Click ⏻✳ button on RF remote → LED lights connected with the RF receiver will flicker once → The receiver is paired with remote successfully.

2. How to delete the pairing:
Press and hold down "Learning Key" on the receiver for over 3 seconds until connected LED lights flicker twice, which means the pairing is deleted successfully.