

# Compact Telehandlers

TF33.7-115EE4






PERFORMANCE AND FEATURES	TF33.7-115EE4		
<b>Performance</b>			
Total unladen weight (lb)	14330		
Maximum capacity (lb)	7300		
Lifting height (ft)	21' 7"		
Maximum reach (ft)	11' 5"		
Maximum operating height (ft)	17' 3"		
Maximum operating reach (ft)	4' 6"		
Capacity at maximum height (lb)	5000		
Capacity at maximum reach (lb)	2900		
Lateral boom movement (inch)	-		
Tilting correction (%)	-		
Boom sections	2		
<b>PowerTrain</b>			
Turbo motor	DEUTZ TCD3.6		
Displacement/cylinders	3600/4		
Engine Power (kW/HP)	85/115		
Anti-pollution technology	TIER 4 - SCR + DOC		
Reversible fan	●		
Maximum speed (mph)	25		
Fuel tank (gal)	22.5		
AdBlue tank (gal)	3.2		
Hydrostatic transmission	● - 2V		
EPD	Plus		
Auto-revving joystick	●		
Axles - Reducers	Axial, Epicyclic		
Machine brakes	Dry disc		
Automatic parking brake	●		
<b>Hydraulic</b>			
Hydraulic pump	LS+FS		
Flow rate/pressure (gal/min - psi)	33 - 3046		
Hydraulic tank	22.5		
Hydraulic outlet at the top of the boom	●		
Rear hydraulic outlets	○		
<b>Cab</b>			
Cab configuration	ECO		
ASCS Adaptive Stability Control System	Light		
FOPS LIV II cab	●		
ROPS cab	●		
Cab commands	Electronic joystick		
Tilting Cab	-		
Reverse shuttle	Dual reverse		
<b>Configuration</b>			
Cab suspension	-		
Boom suspension	○		
Suspension on axles	-		
Work headlights on cab	●		
Sun blind	○		
Tac-lock	●		
Provision for a platform	○		
Two floating forks	●		
Inching-Control	●		
Four-wheel drive	●		
Four-wheel steering	●		
Three steering modes	●		
Standard tyres	400/70-20"		
Optional tyres	405/70-24, 400/70-24"		
Stabilisers	-		
Turret rotation	-		
Type approval as an agricultural tractor	-		
Approval with PNEUMATIC braking	-		
Approval with HYDRAULIC braking	○		
PTO	-		
3-point linkage	-		

- Not Available  
● Standard  
○ Optional

## Load charts

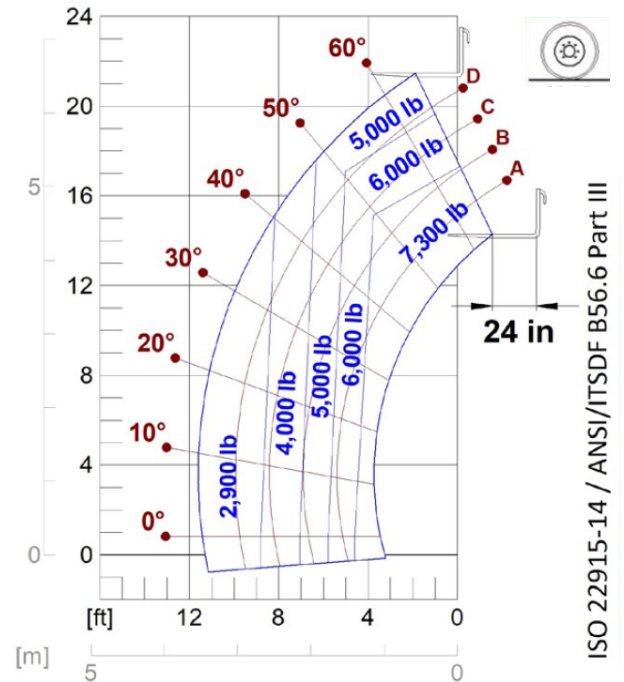


TF33.7-115EE4

## Dimensions



	TF33.7EE		
A (inch)	169.7		
B (inch)	38.2		
C (inch)	107.9		
D (inch)	23.6		
E (inch)	153.9		
F (inch)	11.4		
H (inch)	82.7		
M (inch)	39.8		
P (inch)	83.5		
R (inch)	154.7		
S (inch)	183.5		
Z (inch)	33.5		

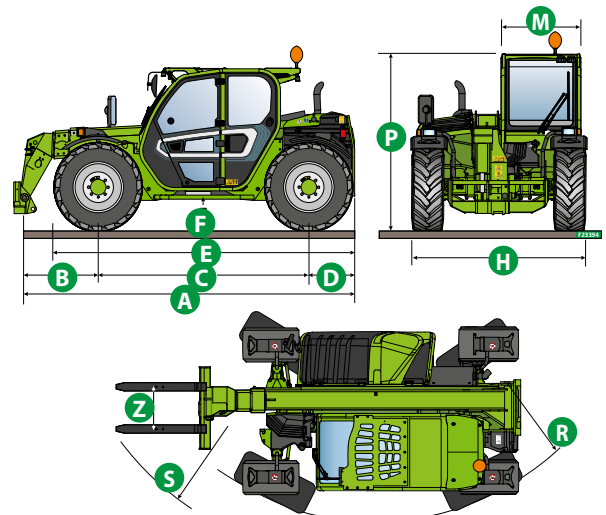

**Your Merlo dealer**



**TF33.7-115EE4:**

... - VIN: ... - SAV: ... - ...

**MERLO S.P.A.**

Via Nazionale, 9

12010 S. Defendente di Cervasca, (Cuneo) Italia

Tel. +39 0171 614111

Fax +39 0171 684101

[info@merlo.com](mailto:info@merlo.com)

[www.merlo.com](http://www.merlo.com)

