
# Compact Telehandlers

## Regulatory area: EE

## TF30.7



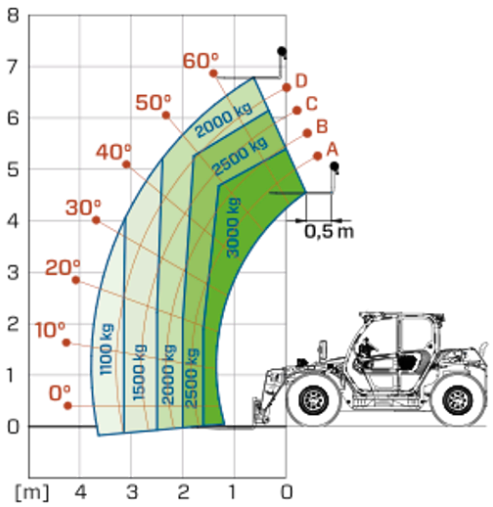


| MODEL | TF30.7EE | TF30.7LEE |
|---|---|---|
| Length (mm) | 4510 | 4510 |
| Wheelbase (mm) | 2800 | 2800 |
| Ground clearance (mm) | 300 | 263.5 |
| Width (mm) | 2000 | 2000 |
| Cab width (mm) | 1010 | 1010 |
| Height (mm) | 2120 | 2000 |
| Fork steering range (mm) | 3820 | 3820 |

| MODEL | TF30.7EE | TF30.7LEE |
|---|---|---|
| **PERFORMANCE** | | |
| Unladen weight (kg) | 6650 | 6650 |
| Maximum load capacity (kg) | 3000 | 3000 |
| Lift height (m) | 6.7 | 6.7 |
| Maximum reach (m) | 3.7 | 3.7 |
| Boom side-shift (mm) | — | — |
| Frame levelling (%) | — | — |
| Boom section | 2 | 2 |
| **POWERTRAIN** | | |
| Engine | DEUTZ TCD2.9HP | DEUTZ TCD2.9HP |
| Range/Cylinders (l) | 2.9/4 | 2.9/4 |
| Engine power (kW/HP) | 75/101.7 | 75/101.7 |
| Anti-pollution technology | Tier 3 | Tier 3 |
| Reversible Fan | ○ | ○ |
| Maximum speed (km/h) | 40 | 40 |
| Fuel tank capacity (l) | 90 | 90 |
| AdBlue tank capacity (l) | — | — |
| Hydrostatic transmission EPD | ● | ● |
| Electronic joystick | ● | ● |
| Axles | Axial | Axial |
| Brakes | Dry discs | Dry discs |
| **HYDRAULIC** | | |
| Delivery / pressure (bar-l/min) | 100-250 | 100-250 |
| Hydraulic oil tank capacity (l) | 55 | 55 |
| **CAB** | | |
| ASCS | Light | Light |
| FOPS/ROPS Cab | ● | ● |
| Tilting cab | — | — |
| **CONFIGURATION** | | |
| Hydropneumatic Suspension CS Merlo | — | — |
| Frame suspension | — | — |
| Permanent four-wheel drive | ● | ● |
| Three steering way | ● | ● |
| Standard tyres | 400/70-20" | 400/70-20" |
| Hydraulically controlled stabilizers | — | — |
| Turret rotation | — | — |
| PTO (rpm) | — | — |
| 3-point rear linkage (kg) | — | — |

— NOT AVAILABLE • ● STANDARD • ○ OPTIONAL

**Your Merlo dealer**

**MERLO S.P.A.**
Via Nazionale, 9
12010 S. Defendente di Cervasca, (Cuneo) Italia
Tel. +39 0171 614111
info@merlo.com www.merlo.com

Release 21/10/2026 - 6:48

Data, specifications and illustrations contained in this document are indicative and not binding. Merlo S.p.A. pursues a policy of continuous research and development; therefore, products may differ from those described or be subject to change without prior notice. The products shown may include optional equipment.