
Medium Capacity Telehandlers

Regulatory area: EU

TF38.10TT



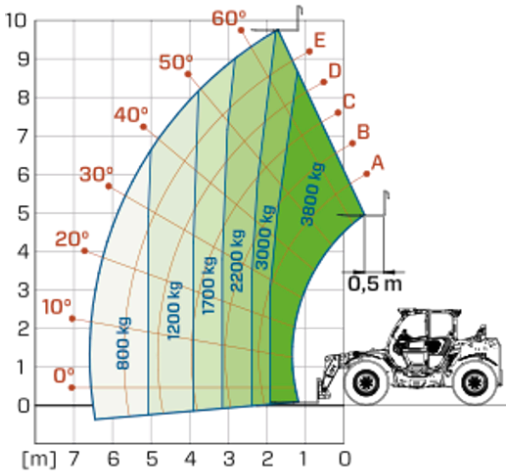

MODEL	TF38.10TT-136	TF38.10TTCS-136	TF38.10TTCS-136-CVT
Length (mm)	4785	4785	4785
Wheelbase (mm)	2840	2840	2840
Ground clearance (mm)	460	460	460
Width (mm)	2310	2310	2310
Cab width (mm)	1010	1010	1010
Height (mm)	2540	2540	2540
Fork steering range (mm)	4800	4800	4800

MODEL	TF38.10TT-136	TF38.10TTCS-136	TF38.10TTCS-136-CVT
PERFORMANCE			
Unladen weight (kg)	8600	8800	8800
Maximum load capacity (kg)	3800	3800	3800
Lift height (m)	9.7	9.7	9.7
Maximum reach (m)	6.6	6.6	6.6
Boom side-shift (mm)	+/- 180	+/- 180	+/- 180
Frame levelling (%)	+/- 8	+/- 8	+/- 8
Boom section	3	3	3
POWERTRAIN			
Engine	PERKINS 904	PERKINS 904	PERKINS 904
Range/Cylinders (l)	3.6/4	3.6/4	3.6/4
Engine power (kW/HP)	100/136	100/136	100/136
Anti-pollution technology	Stage V - SCR + DOC + DPF	Stage V - SCR + DOC + DPF	Stage V - SCR + DOC + DPF
Reversible Fan	●	●	●
Maximum speed (km/h)	40	40	40
Fuel tank capacity (l)	140	140	140
AdBlue tank capacity (l)	16	16	16
Hydrostatic transmission EPD	●	●	CVTronic
Electronic joystick	●	●	●
Axles	Drop portal	Drop portal	Drop portal
Brakes	Dry discs	Dry discs	Dry discs
HYDRAULIC			
Delivery / pressure (bar-l/min)	139-250	139-250	139-250
Hydraulic oil tank capacity (l)	100	100	100
CAB			
ASCS	Light	Light	Light
FOPS/ROPS Cab	●	●	●
Tilting cab	–	–	–
CONFIGURATION			
Hydropneumatic Suspension CS Merlo	–	●	●
Frame suspension	–	–	–
Permanent four-wheel drive	●	●	●
Three steering way	●	●	●
Standard tyres	400/70-24"	400/70-24"	400/70-24"
Hydraulically controlled stabilizers	–	–	–
Turret rotation	–	–	–
PTO (rpm)	–	–	–
3-point rear linkage (kg)	–	–	–

– NOT AVAILABLE • ● STANDARD • ○ OPTIONAL

Your Merlo dealer

MERLO S.P.A.
Via Nazionale, 9
12010 S. Defendente di Cervasca, (Cuneo) Italia
Tel. +39 0171 614111
info@merlo.com www.merlo.com

Release 14/09/2026 - 7:18

Data, specifications and illustrations contained in this document are indicative and not binding. Merlo S.p.A. pursues a policy of continuous research and development; therefore, products may differ from those described or be subject to change without prior notice. The products shown may include optional equipment.