


NTN BEARING CORPORATION OF AMERICA

Head Office

1600 E. Bishop Court, P.O. Box 7604

Mount Prospect, IL 60056-7604, U.S.A.


Phone: 847-298-7500

Fax: 847-699-9744

Toll Free: 800-323-2358

Email: mkt@ntnamerica.com
Website: www.ntnamericas.com


Item # UELT209D1, Take-Up Unit, Cast Housing, Eccentric Locking Collar, UELT Type

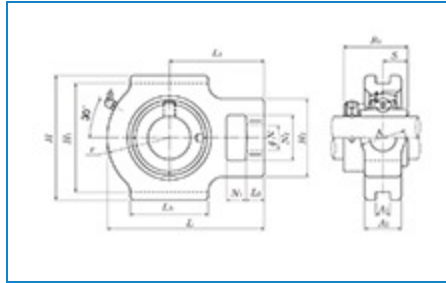
[Order Now](#) | [Technical Specifications](#) | [Dimensional Specifications](#)
Order Now
Ordering Options
FIND A DISTRIBUTOR
CONTACT NTN CUSTOMER SUPPORT SPECIALIST
ORDER THROUGH NTN DOL (AUTHORIZED DISTRIBUTORS ONLY)
Technical Specifications
Type

Take-Up Unit

Bearing Type	Ball Bearing
Locking Device	Eccentric Locking Collar
Seal Type	Contact
Seal Material	Nitrile Rubber
Bearing Number	UEL209D1
Housing Number	T209D1
Housing Material	Cast Iron
Performance	Light Duty
Dynamic Load Rating	7300 lbf 32500 N 32.50 kN
Static Load Rating	4600 lbf 20400 N 20.40 kN
Rotational Speed [Max]	3500.0 RPM
Weight	5.500 lb 2.500 kg
Operating Temperature Range	-40 to 250 °F -40 to 120 °C
Lubrication	Relubricatable

Dimensional Specifications

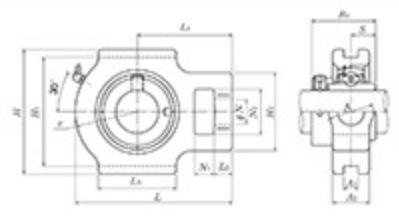

Take-Up Unit, Cast Housing, Eccentric Locking Collar, UELT Type - Dimensions

d	1.7717 in 45.000 mm
---	------------------------

L	5.7187 in 145.0 mm
H	4.5937 in 117.0 mm
H1	4.0156 in 102.0 mm
H2	3.2812 in 83.0 mm
L1	3.4687 in 88.0 mm
L2	0.7187 in 18.0 mm
L3	3.2812 in 83.0 mm
N	1.1562 in 29.0 mm
N1	0.7500 in 19.0 mm
N2	1.9375 in 49.0 mm
A	1.9375 in 49.0 mm
A1	0.6299 in 16.0 mm
A2	1.3750 in 35.0 mm
r	2.2500 in 57.0 mm
B1	2.2165 in 56.300 mm
S	0.8425 in 21.400 mm
F	0.1929 in 4.900 mm

