


















Specifications (Series luminaires)




	Voltage (V)	230V
Hz	Frecuency (Hz)	50-60Hz
Φ	Power factor (Cos fi)	>0,9
	Dimming	No
	IP Tightness index	IP20
	IP installed Sealing rating	40
	Body color	White
	Diffuser Material	PMMA P
	Body	FE
K	Colour temperature	3.000K
	CRI Colour rendering index	>80
	UGR	<19
	Measures	600x600mm
	Mounting position	Empotrar
Φ_{LUM}	Flux (lm)	3.618lm
	Electrical isolation	CII
	Lifetime	(L70B50>) 50.000h

References




	W_{LED}	W		ϕ	ϕ_{LED}	ϕ_{LUM}	K		
470759	40W	36W	1000mA	>0,9	4.316lm	3.618lm	3.000K	575 x 575	No

Dimensions

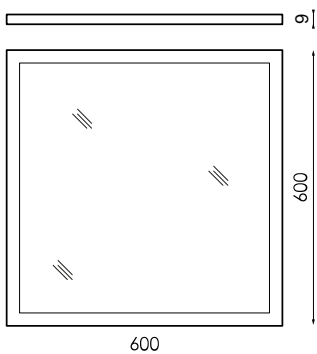

Photometry

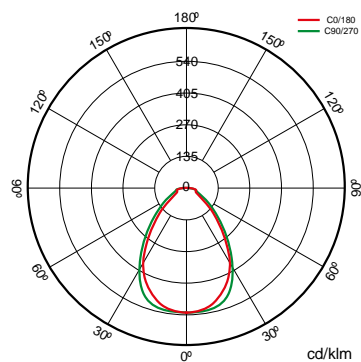

On request



Emergency kit 1h



Dali-Bluetooth

Accessories



964562

FRAME WH
RECESSED PLASTER
SILENT LED 60X60CM




164092

WH SURFACE
DRAWER SILENT
LED 60X60CM



207638

TRANS POWER
CABLE 3X0.75 1M 1PC



472500

SUSPENSION KIT
1.5M SILENT LED (4
UNITS)



397391

RECESSED CEILING
FRAME HIDDEN
PROFILE SILENT I
60X60



537933

ADJUSTABLE
POWER CABLE
TRANS 5X0.75 1M 1PC



Solutions

S



CTE Pack

description



Regulation for the contribution of natural light to comply with the requirements of the CTE. Independent control of two lines of dimmable DALI luminaires with sensor to install in a luminaire or surface box. Preconfigured for easy operation.



CLASSROOMS Pack

description



Regulation by contribution of natural light and stand alone presence. Lighting control system to meet CTE requirements and optimize energy use by taking advantage of natural light and automatic shutdown in case of absence.



BLUETOOTH Pack

description



Device that enables DALI luminaire control through any Bluetooth® terminal via free APP that offers us control of flow regulation, color, scene configuration, behavior linked to schedules.

Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es

Info



UGR <19 with R(%):70/70/30,S(m2)<36 y h(m)≥2,8.