













Specifications (Series luminaires)



	Voltage (V)	24V
Hz	Frecuency (Hz)	50/60Hz
	IP Tightness index	IP65
K	Colour temperature	RGBW
	CRI Colour rendering index	>RGBW
	Opening angle	120°
	Measures	5.000x12x0mm
	Operating temperature	-
	Flux (lm)	max. 0lm
	Electrical isolation	CIII
	Lifetime	(L70B50>)50.000h
	Lifetime	(L70B50>)50.000h




References



	W	K		
471381	19,2W	RGBW RGBW	RGBW	5.000x12x0mm

Dimensions

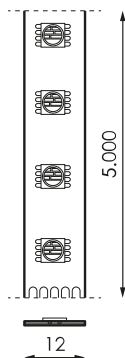

Photometry



Info



Pérdida de intensidad para más de 10m (7,2W/m-14,4W/m).
 Pérdida de intensidad para más de 5m (19,2W/m). La vida útil de nuestras tiras de led es de 50.000h siempre que la temperatura ambiente no supere los 25°C. Con el fin de garantizar la vida del led para nuestras tiras $\geq 9,6W$, es obligatorio colocarlo sobre una superficie que disipe el calor que generan.

Info



Un pixel por cada 10cm.