
















## Specifications (Series luminaires)

	<b>Voltage (V)</b>	230V
Hz	<b>Frecuency (Hz)</b>	50-60Hz
$\Phi$	<b>Power factor (Cos fi)</b>	0.9
	<b>Dimming</b>	DALI
	<b>IP Tightness index</b>	IP65
	<b>IK Impact resistance</b>	IK07
	<b>Body color</b>	White
	<b>Diffuser Material</b>	PC-O
	<b>Body</b>	PC
K	<b>Colour temperature</b>	4.000K / 6.500K
	<b>CRI Colour rendering index</b>	>80
	<b>Measures</b>	600x84x71mm
	<b>Weight</b>	0.68Kg
	<b>Operating temperature</b>	-10°C~+35 °C
$\Phi_{LUM}$	<b>Flux (lm)</b>	2.414/2.533lm
	<b>Electrical isolation</b>	CII
	<b>Lifetime</b>	(L70B50>) 50.000h




## References




	$W_{LED}$	W	$\phi_{LED}$	$\phi_{LUM}$	K		
<b>521031</b>	20W	18W	2.943/3.090lm	2.414/2.533lm	4.000K / 6.500K	>80	600x84x71mm

## Dimensions

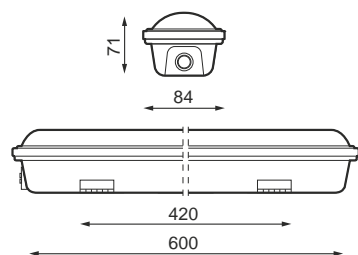

## Photometry

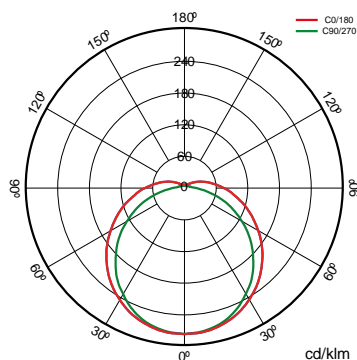

## Info



Not suitable for your exposure to uva rays.

---

## Solutions

---

S



### Cora Industry

---

#### description




Cora Industry LITE is the new standalone lighting control system, which is ideal for any industrial installation. With simple, quick, intuitive installation, Cora Industry Lite represents a turning point in development in the industry, providing renewal, control and full management of lighting in factories and warehouses. It has a built-in light sensor, regulates the flux emitted by the luminaires to compensate for the contribution from natural light and achieves optimal energy use by continually monitoring the light level to adjust the luminaires to the levels set.

---

#### Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web [www.prilux.es](http://www.prilux.es)

**Info** 

Connecteur rapide.