















Specifications (Series luminaires)




	Electrical isolation	CIII
	Voltage (V)	12V acV
Hz	Frecuency (Hz)	50-60Hz
	Dimming	No
	IP Tightness index	IP68
	IK Impact resistance	IK08
	Body color	White
	Body	ABS
K	Colour temperature	3.000K/3.000K
	Opening angle	100°
	Measures	Ø280x130mm
	Lifetime	(L70B50>) 50.000h

References

	W		K	
498180	20W	1650mA	3.000K	Ø280x130mm
539104	20W	1650mA	5.000K	Ø280x130mm
539111	18W	1500mA	RGB	Ø280x130mm
539128	18W	1500mA	RGB	Ø280x130mm

Dimensions

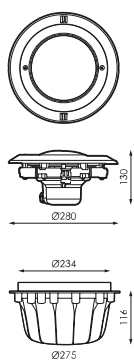

Photometry

Accessories



442374

RGB CONTROLLER
WITH MAX. 20 LAMPS



534062

TRANSFORMER
300W 12VAC IP65



534352

TRANSFORMER
500W 12VAC IP65



Info



Possibility of changing lamps with up pool. Through a rolled up inside the niche cable can remove the lamp out of the water so you can change it without draining the pool. Maximum depth of installation is 2 meters.