

















Specifications (Series luminaires)




	Electrical isolation	CII
	Voltage (V)	220-240V
Hz	Frecuency (Hz)	50-60Hz
	Dimming	No
	IP Tightness index	IP20
	Body color	White
	Diffuser Material	PC
	Body	PC
K	Colour temperature	3.000K-6.500K
	CRI Colour rendering index	80
	Opening angle	120°
	Measures	225x29,5mm
	Mounting position	Empotrar
	Flux (lm)	1.851lm
	Lifetime	(L70B50-) 25.000h

References



	W	ϕ_{LUM}	K					
590532	18W	1.798lm	3.000K	>80	White	200mm	225x29,5mm	No
590549	18W	1.851lm	4.000K	>80	White	200mm	225x29,5mm	No
590556	18W	1.851lm	6.500K	>80	White	200mm	225x29,5mm	No

Dimensions

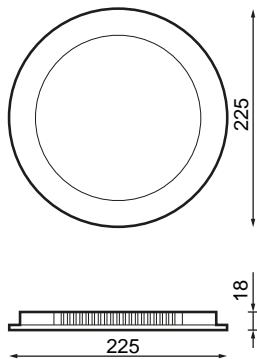

Photometry



Info



PCB Module made in aluminium in order to make easily the dissipation of temperature . Internal polycarbonate board to improve the light reflection. Perimetral light.



Accessories



590587

BRENO BASIC
ACCESSORY 18W
SURFACE 225X32MM
WHITE