





## Applications



Offices



Classrooms



Retail



Home



Large surfaces



Hotels



Restaurants












Health care






## Certifications



## Specifications (Series luminaires)




	<b>Voltage (V)</b>	230V
Hz	<b>Frecuency (Hz)</b>	50-60Hz
	<b>Dimming</b>	No
	<b>IP Tightness index</b>	IP20
	<b>IP installed Sealing rating</b>	40
	<b>Body color</b>	White
	<b>Diffuser Material</b>	PMMA P
	<b>Body</b>	FE
K	<b>Colour temperature</b>	3.000K/4.000K
	<b>CRI Colour rendering index</b>	>80
	<b>UGR</b>	<19

	<b>Measures</b>	300x1.200mm
	<b>Mounting position</b>	Empotrar
	<b>Flux (lm)</b>	3.618lm
	<b>Electrical isolation</b>	CII
	<b>Lifetime</b>	(L70B50>) 50.000h





Prilux guarantees a  $\pm 10\%$  tolerance in light flux measurements.
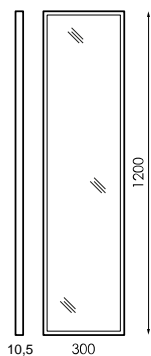
## Dimensions




## References



	W <sub>LED</sub>	W		$\phi_{LED}$	$\phi_{LUM}$	K		
<b>478052</b>	40W	36W	1000mA	4.316lm	3.618lm	3.000K	275 x 1.175	No
<b>478069</b>	40W	36W	1000mA	4.953lm	4.026lm	4.000K	275 x 1.175	No
<b>483933</b>	40W	36W	1000mA	4.953lm	4.026lm	4.000K	275 x 1.175	No

## Accessories



kit 1h



Dali-Blue



**207591**

FRAME BL RECESS  
PLASTER SILENT LED  
120X30CM

**207874**

WH SURFACE  
DRAWER SILENT  
LED 120X30CM

**207638**

TRANS POWER  
CABLE 3X0.75 1M 1PC

**472500**

SUSPENSION KIT  
1.5M SILENT LED (4  
UNITS)



**537933**





























## Solutions

S



### CTE Pack

#### description



Regulation for the contribution of natural light to comply with the requirements of the CTE. Independent control of two lines of dimmable DALI luminaires with sensor to install in a luminaire or surface box. Preconfigured for easy operation.



### CLASSROOMS Pack

#### description



Regulation by contribution of natural light and stand alone presence. Lighting control system to meet CTE requirements and optimize energy use by taking advantage of natural light and automatic shutdown in case of absence.



### BLUETOOTH Pack

#### description



Device that enables DALI luminaire control through any Bluetooth® terminal via free APP that offers us control of flow regulation, color, scene configuration, behavior linked to schedules.

#### Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web [www.prilux.es](http://www.prilux.es)



---

## Rules

---



UGR <19 with R(%):70/50/20, S(m2)<30 and h(m)>3,15.

## Info



UGR <19 with R(%):70/70/30,S(m2)<36 y h(m)≥2,8.