

1 2 3 4 5



<<<< CUSTOMER APPROVAL >>>>

THIS DRAWING IS BEING SUBMITTED FOR YOUR APPROVAL OF THIS DESIGN ON YOUR APPLICATION AND REQUIRMENTS.

A SIGNATURE IS REQUIRED BEFORE AN ORDER CAN BE PROCESSED.

APPROVED BY _____ APPROVAL DATE _____/_____/_____

REV	DESCRIPTION	DATE	SIGNATURE	CHECKED
XXX	XXX	00/00/00	XXX	XXX

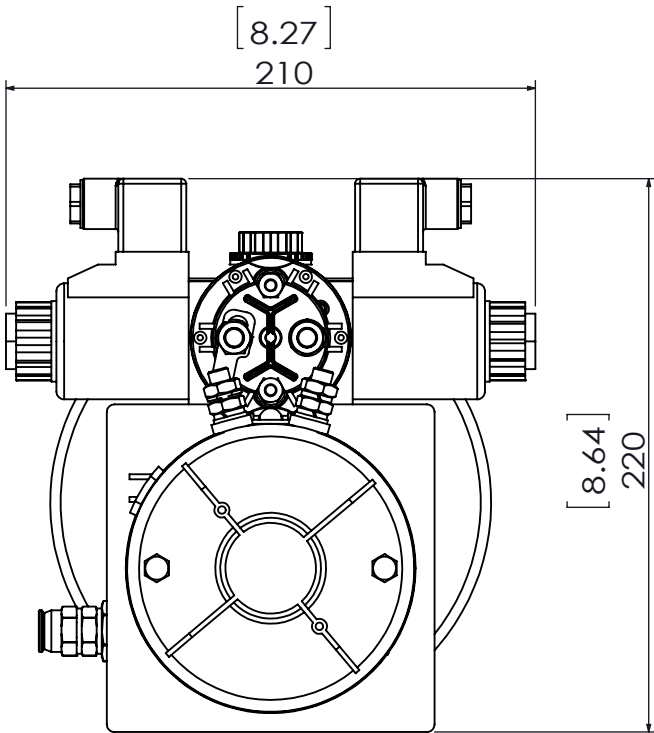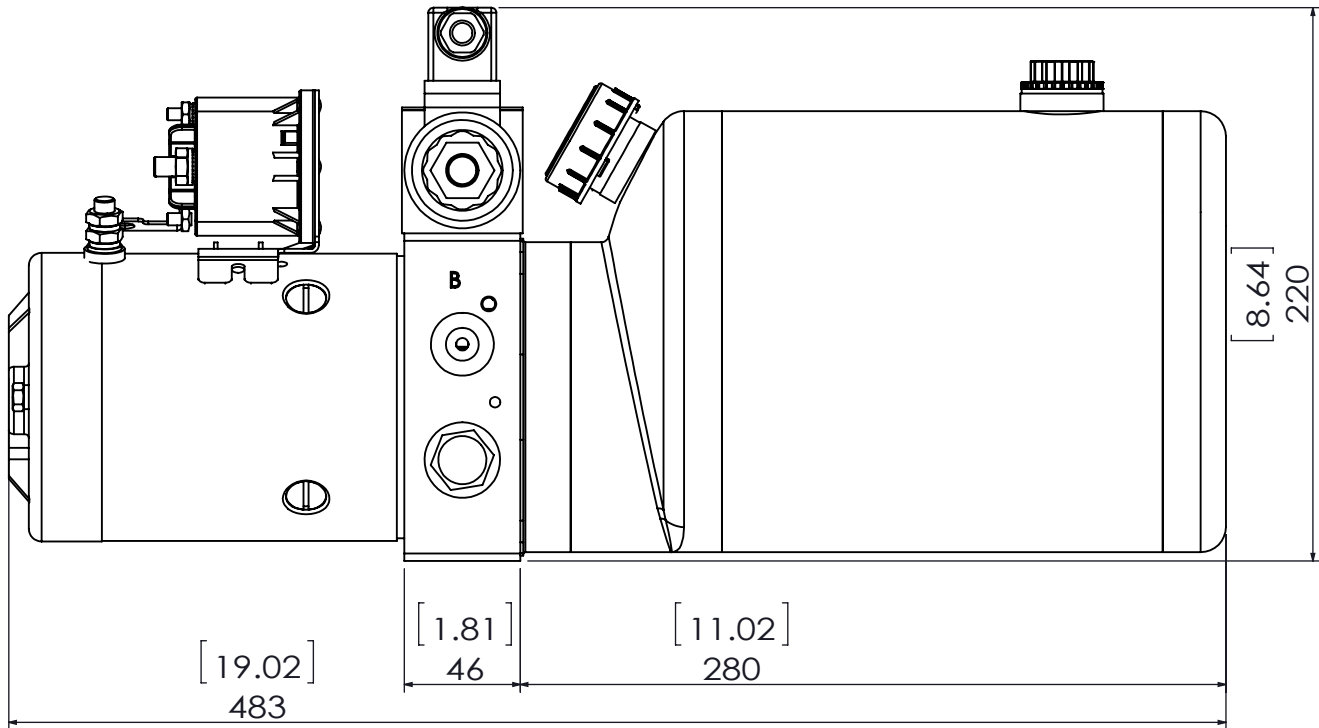

Network 标签


MODEL 16DA131ZH211A

Relief Valve Setting 2500PSI

Motor(KW) 1.6KW Voltage 12V

Pump Disp 2.1ML Flow 5.2LPM

Tank Usable 3.8 Litres

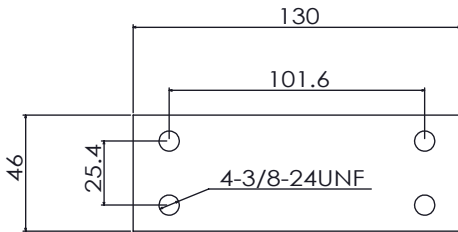

SPECIFICATIONS

ELECTRICAL MOTOR	416A-2P-A,DC12V,1.6KW
FLOW RATE	5.5LPM@1500psi
MAX. PRESSURE	3000psi
RELIEF SETTING	2500psi
GEAR PUMP DISP.	G210T 2.1mL/REV
RESERVOIR	LS1A,STEEL, 1GAL
REMOTE CONTROL	N/A
MOUNTING	VERTICAL OR HORIZONTAL
PORTING	SAE6#



DESIGNED BY KMC	CHECKED BY X	APPROVAL DATE. 2014/01/23
---------------------------	-----------------	-------------------------------------

REFER TO		
CUSTOMER 16DA131ZH211A	FILE NAME 16D130-029.Rev.E	SCALE 1 : 3

HYDRAULIC POWER UNIT

16D130-029

REVISION E SHEET 1 : 3

