

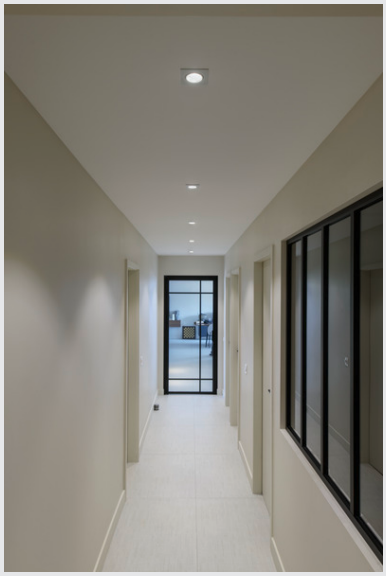


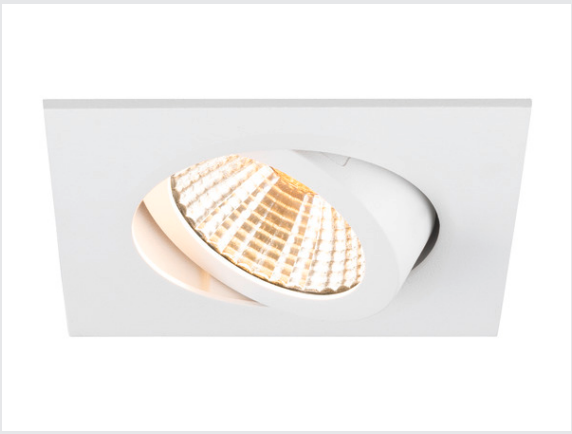

# NEW TRIA® UNIVERSAL 68

**recessed ceiling light, 2500/3000/4000K, 38°, IP 20, square, white**

Discover the new generation of our NEW TRIA® recessed ceiling light with even more modularity for an individual lighting experience. Top sellers such as the NEW TRIA® UNIVERSAL 68 are available as a complete set. Lighting design options are provided by the integrated multi-wattage LED MODULE, which is variable in terms of output and light intensity and available with different beam angles (38°/60°). While the CCT switch allows easy selection between 2500K, 3000K and 4000K, the pivot range ensures flexible alignment of the light. In black or white, the high-quality housing blends harmoniously into any room ambience. And thanks to the 68mm mounting ring supplied, the downlights can also be installed quickly and simply.




## TECHNICAL DATA

| | |
|---|---|
| **Item no.** | 1007437 |
| **Rotating or tilting** | Tiltable |
| **IP Code** | IP 20 |
| **Assembly** | Recessed |
| **Assembly details** | Ceiling |
| **Dimmable** | Yes |
| **Dimming technology** | Leading edge,trailing edge |
| **Primary nominal voltage** | 220-240V ~50/60Hz |
| **Secondary power / voltage** | 100-180 mA |
| **Safety class** | II |
| **Wattage** | 8.6 W |
| **Minimum ambient temperature** | -20 °C |
| **Maximum ambient temperature** | 35 °C |
| **Number of luminaires at LS B16A** | 128 |
| **Number of luminaires at LS C16A** | 212 |
| **Level of inrush current** | 10 A |
| **Duration of inrush current** | 100 µs |
| **Stroboscopic effect (SVM)** | 0.02 |
| **Lumen** | 540/600/600 lm |
| **Colour temperature** | 2500/3000/4000 Kelvin |
| **Beam angle** | 38 ° |
| **Color** | white |

| | |
|---|---|
| 1807470 |  |

| | |
|---|---|
| **CRI** | 90 |
| **LXXBXX data** | L80B10 |
| **Service life** | 50000 h |
| **Risk Group** | 1 |
| **Length** | 8.2 cm |
| **Width** | 8.2 cm |
| **Height** | 3.4 cm |
| **Net weight** | 0.21 kg |
| **Gross weight** | 0.225 kg |
| **Shape of cut-out** | round |
| **Installation depth** | 4 cm |
| **Installation diameter** | 6.8 cm |
| **BIG WHITE Page** | 136 |