
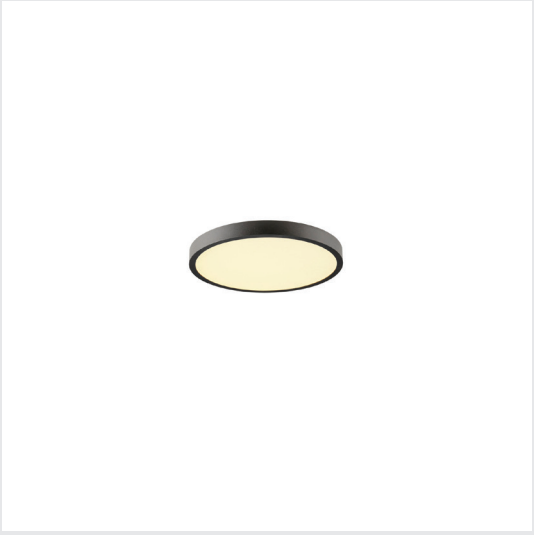


MEDO 2 SLIM 30 | CL, DALI

MEDO 2 SLIM 30, CL, DALI, Ceiling Surface-Mounted Luminaire, 3000/4000 K, 8.6 W, 85°, black

The MEDO 2 SLIM 30 is a surface-mounted ceiling luminaire suitable for indoor use. It has a power consumption of 8.6 watts and offers a colour temperature of 3000 or 4000 Kelvin with a beam angle of 85 degrees. The luminaire features a DALI 2 dimming function and touch control, allowing flexible light adjustment. The housing is made of aluminium and steel, with the luminaire measuring 29.5 cm in diameter and 4.9 cm in height. It has an IP20 protection rating and an impact resistance class of IK03. These technical specifications make the MEDO 2 SLIM 30 a functional solution for various indoor lighting requirements.



Item no.	1011701
IP Code	IP20
Impact resistance class	IK03
Assembly	Surface
Assembly details	Ceiling,Wall,
Dimmable	true
Dimming technology	DALI 2Touch
Number of through-wires	50
Primary nominal voltage	220-240V ~ 0/50/60Hz
Secondary power / voltage	200 mA
Safety class	I
Wattage	9 W
Maximum ambient temperature	45°C
Number of luminaires at LS B16A	139.0
Number of luminaires at LS C16A	139.0
Level of inrush current	2.71 A
Duration of inrush current	38 µs
Beam angle	85°
Color	black
CRI	90
UGR ≤	19
LXXBXX data	L80B10
Service life	100 000 h
Risk Group	0
Height	4.9 cm
Diameter	29.5 cm
Net weight	2.1 kg
Gross weight	3.1 kg
BIG WHITE Page	200

Accessories

1011779	MEDO 2 SUSPENSION KIT, 1.5 m Pendant Length, Central, black
1011780	MEDO 2 SUSPENSION KIT, 1.5 m Pendant Length, Central, white
1011781	MEDO 2 SUSPENSION KIT, 5 m Pendant Length, Central, black
1011782	MEDO 2 SUSPENSION KIT, 5 m Pendant Length, Central, white
1011783	MEDO 2 SUSPENSION KIT, 3 m Pendant Length, Parallel, black
1011784	MEDO 2 SUSPENSION KIT, 3 m Pendant Length, Parallel, white