04 Recessed Spots Adjustable LED>The Interchangeable Rings Range

11104K/B/W

Aluminium



3W/5W COB LED adjustable recessed spot with interchargeable rings.

Ring must be ordered separately.

Requires 350/500mA driver.


Complies with standard EN60598-1 and any other specific standards.

IP20 80 CRI ADJUSTABLE DIMMABLE DARK LIGHT QUICK FIX

Downloads

IES

Dimensions

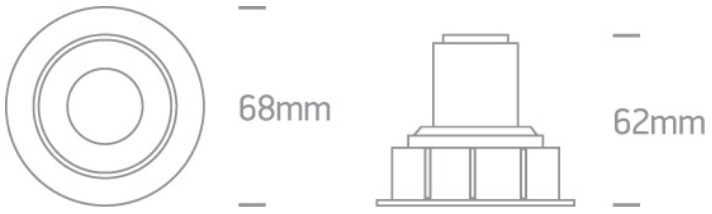

Must be ordered separately



050100/B



050100/BS



050100/C



050100/CU



89004



89004T

Physical Specification

Item Group	04 Recessed Spots Adjustable LED
Family	The Interchangeable Rings Range Aluminium
Order Code	11104K/B/W
Colour	Black
Material	Aluminium
Shape	Circular
Height	62mm
Diameter	68mm
Cutout Hole Diameter	60mm
Recessed Ceiling	Yes
Depth Required	80mm
Indoor	Yes
Adjustable	1 Direction

Electrical Characteristics

Fitting

Input Type	Constant Current
Input Current	350mA/500mA
Safety Class	III
Power(Watts)	3/5W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Cree
LED Number	1
Cable Length	40cm
F Mark	F

Illumination Data

Colour Temperature	3000K
Lumen Output	400lm@5W
Light Efficiency	80lm/W
CRI	80
Beam Angle	35°
Illumination Diagram	
Dark Light	Yes

Packing Info

Box Length	8,5cm
Box Width	8cm
Box Height	8cm
Box Weight	0.176kg
Pcs/Carton	50
Barcode	5291889054108
HS Code	9405413990

Certification & Warranty

Warranty	5 years