
06 Downlights Fixed LED>The Budget Downlight Range Aluminium

10103T/W/C

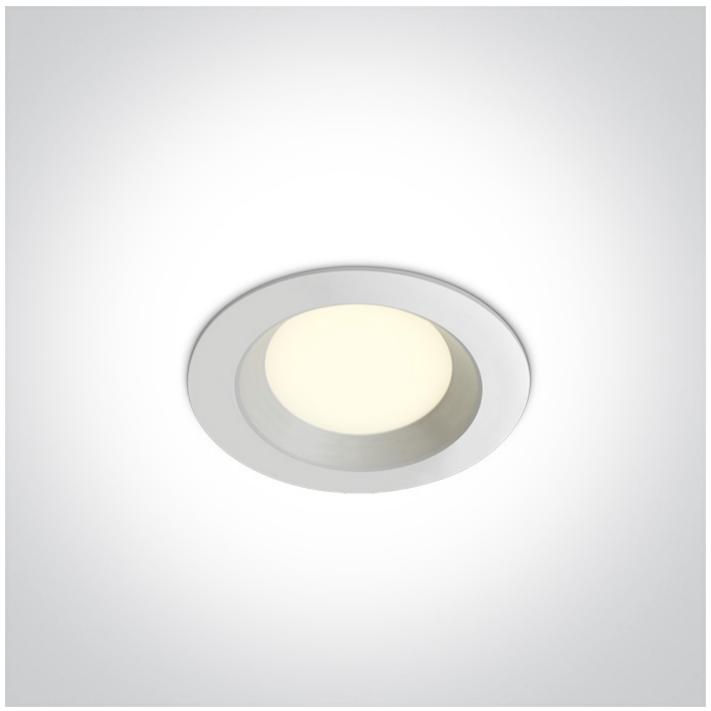

3W SMD LED recessed downlight, budget range, IP20.

Complete with 250mA driver.


Complies with standard EN60598-1 and any other specific standards.

IP20 80 CRI CE

Downloads


IES

Dimensions

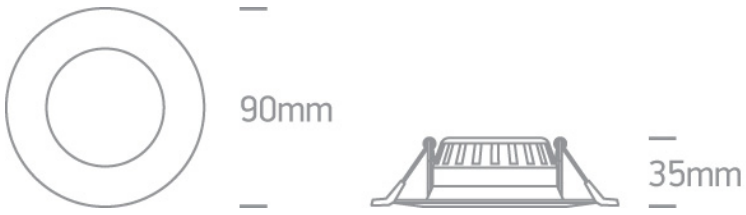

Gallery





Physical Specification

Item Group	06 Downlights Fixed LED
Family	The Budget Downlight Range Aluminium
Order Code	10103T/W/C
Colour	White
Material	Aluminium
Shape	Circular
Height	35mm

Diameter	90mm
Cutout Hole Diameter	68mm
Recessed Ceiling	Yes
Depth Required	50mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	⧈
Power(Watts)	3W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F

Fitting

Input Type	Constant Current
Input Current	250mA
Voltage	9V
Safety Class	III
Power(Watts)	2,5W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Sanan

LED Number	6
F Mark	

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	2-3W
Power Factor	0,5
Constant Current	Yes
Output	250mA
Voltage Range	8-12V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	Kegu

Illumination Data

Colour Temperature	4000K
Lumen Output	220lm
Light Efficiency	73,33lm/W
CRI	80
Beam Angle	120°
Illumination Diagram	

Packing Info

Box Length	9,5cm

Box Width	9,5cm
Box Height	6cm
Box Weight	0,125kg
Pcs/Carton	100
Barcode	5291889045755
HS Code	9405409900

Certification & Warranty

Warranty	2 Years
Weee Directive	Yes