05 Downlights Fixed>The IP54 Downlights CCT V

10113B/W/V



13W LED CCT Variable recessed downlight, IP54. Suitable for bathroom installations.

Complete with non-dimmable driver.


Complies with standard EN60598-1 and any other specific standards.

IP54 CCT V 80 CRI CE

Downloads


IES CE

Dimensions

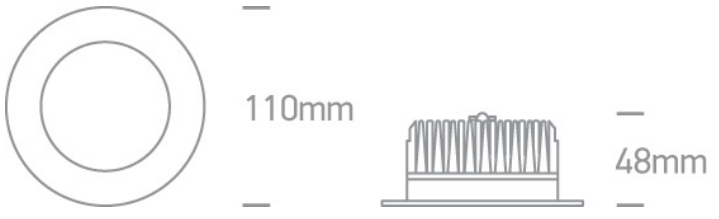

Gallery





Physical Specification

Item Group	05 Downlights Fixed
Family	The IP54 Downlights CCT V
Order Code	10113B/W/V
Colour	White
Material	Die Cast
Diffuser Material	Plastic
Shape	Circular

Height	48mm
Diameter	110mm
Cutout Hole Diameter	95mm
Recessed Ceiling	Yes
Depth Required	70mm
Indoor	Yes
Outdoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	⧈
Power(Watts)	13W
IP Rating	IP54
Light Source	LED built in
Dimmable	No
F Mark	F

Fitting

Input Type	Constant Current
Input Current	300mA
Safety Class	III
IP Rating	IP54
Light Source	LED built in
LED Type	SMD 2835

F Mark	

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Constant Current	Yes
Output	300mA
IP Rating	IP20
Safety Class	
Dimmable	No
Brand	0

Illumination Data

Colour Temperature	3000K-4000K-5000K
Lumen Output	950lm
Light Efficiency	73lm/W
CRI	80
Beam Angle	90°
Illumination Diagram	

Packing Info

Box Length	11,5cm
Box Width	11,5cm
Box Height	9cm
Box Weight	0.312kg
Pcs/Carton	24
Barcode	5291889082354
HS Code	9405413990

Certification & Warranty

Warranty	2 years