
12 Wall & Ceiling LED>Linear Outdoor Series Double Sided

67526B1/AN/W

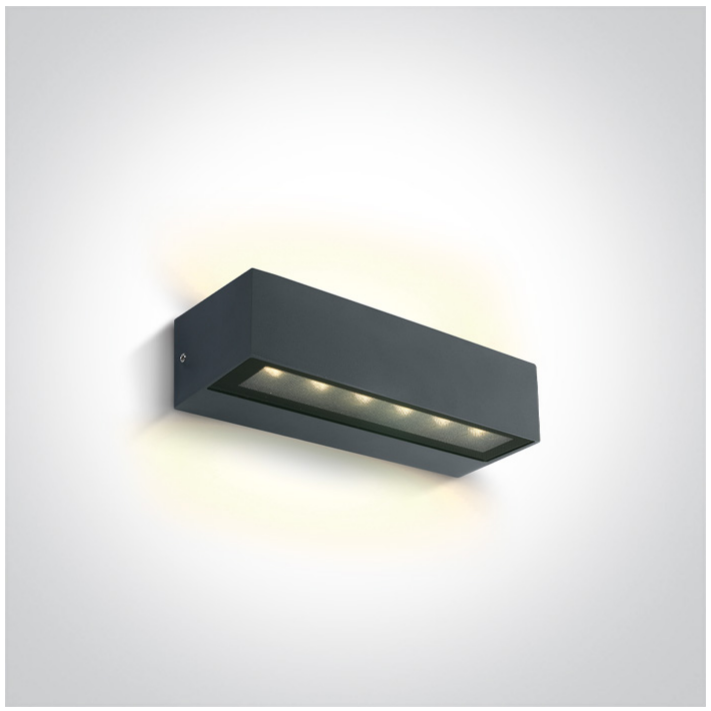

2x6W Wall light, IP65.

Complete with 300mA driver.

Complies with standard EN60598-1 and any other specific standards.

IP65 IK07 80 CRI CE

Downloads

IES

Dimensions



Physical Specification

Item Group	12 Wall & Ceiling LED
Family	Linear Outdoor Series Double Sided
Order Code	67526B1/AN/W
Colour	Anthracite
Material	Die Cast
Shape	Rectangular
Length	222mm
Width	70mm
Height	50mm
Surface Wall	Yes
Indoor	Yes
Outdoor	Yes

Adjustable	No
IK Rating	7

Electrical Characteristics

Gear	Built In

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	2x6W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
F Mark	

Fitting

Input Type	Constant Current
Input Current	300mA
Voltage	35,12V
Power(Watts)	10,54W
IP Rating	IP65
Light Source	LED built in
LED Type	SMD 3030
LED Brand	Osram

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes

60 Hz	Yes
Power(Watts)	7,2-12W
Power Factor	0,9
Constant Current	Yes
300mA	24-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Brand	Eaglerise
Protection	0

Illumination Data

Colour Temperature	3000K
Lumen Output	720lm
Light Efficiency	60lm/W
CRI	80
Illumination Diagram	

Packing Info

Box Weight	1.000kg
Pcs/Carton	12
Barcode	5291889075776
HS Code	9405413990

Certification & Warranty

Warranty	2 years