
05 Downlights Fixed>The IP65 Frameless Range

10115CF/C

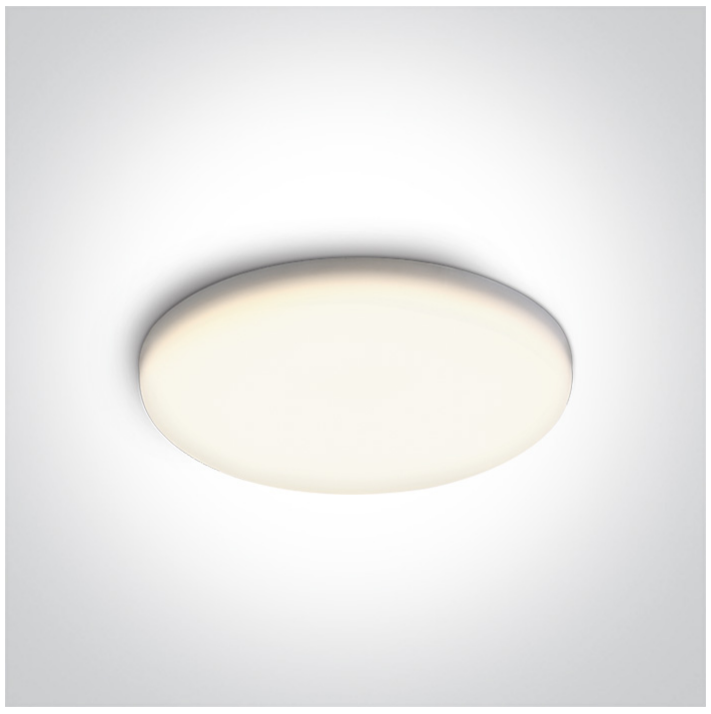

15W LED frameless downlight, IP65. Suitable for Indoor/Outdoor installation and bathroom.

Complete with 500mA driver.

Complies with standard EN60598-1 and any other specific standards.

IP65 IK08 90 CRI CE

Downloads

IES CE

Dimensions



Gallery



Physical Specification

Item Group	05 Downlights Fixed
Family	The IP65 Frameless Range
Order Code	10115CF/C
Colour	White
Material	Die Cast
Diffuser Material	PC
Shape	Circular

Height	22mm
Diameter	155mm
Cutout Hole Diameter	135mm
Recessed Ceiling	Yes
Depth Required	50mm
Indoor	Yes
Outdoor	Yes
Adjustable	No
IK Rating	8

Electrical Characteristics

Gear	External-Included

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	⧈
Power(Watts)	15W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
F Mark	F

Fitting

Input Type	Constant Current
Input Current	500mA
Voltage	22,5V
Safety Class	III
Power(Watts)	11,25W
IP Rating	IP65

Light Source	LED built in
LED Type	SMD 4014
LED Brand	Zhaochi
F Mark	

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	8,5-12W
Power Factor	0,9
Constant Current	Yes
500mA	17-24V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	Kegu


Illumination Data

Colour Temperature	4000K
Lumen Output	1250lm
Light Efficiency	83,33lm/W
CRI	90
Beam Angle	120°
Illumination Diagram	

Packing Info

Box Length	21cm
Box Width	19,5cm
Box Height	3cm
Box Weight	0.420kg
Pcs/Carton	20
Carton Length	43cm
Carton Width	37cm
Carton Height	22cm
Carton Weight	9,3Kg
Barcode	5291889057116
HS Code	9405413990

Energy Label

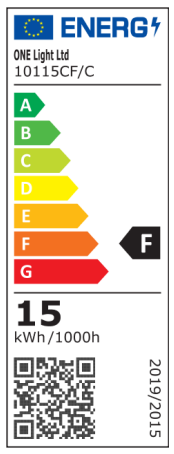

Energy Class	F
Energy Consumption	15kWh/1000h

Certification & Warranty

Warranty	2 years