06 Downlights Fixed LED>The Budget Downlight Range Aluminium

10124T/W/W



24W SMD LED recessed downlight, budget range, IP20.

Complete with 600mA driver.


Complies with standard EN60598-1 and any other specific standards.

IP20 80 CRI CE

Downloads

IES

Dimensions

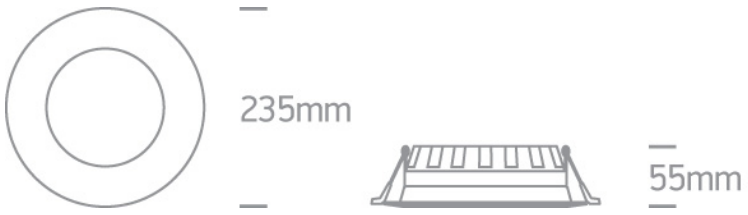

Gallery





Physical Specification

Item Group	06 Downlights Fixed LED
Family	The Budget Downlight Range Aluminium
Order Code	10124T/W/W
Colour	White
Material	Aluminium
Shape	Circular
Height	55mm

Diameter	235mm
Cutout Hole Diameter	210mm
Recessed Ceiling	Yes
Depth Required	75mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	⧈
Power(Watts)	24W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F

Fitting

Input Type	Constant Current
Input Current	600mA
Voltage	36V
Safety Class	III
Power(Watts)	21,6W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Sanan

LED Number	48
F Mark	

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	14,5-23,2W
Power Factor	0,95
Constant Current	Yes
600mA	25-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	Kegu

Illumination Data

Colour Temperature	3000K
Lumen Output	1700lm
Light Efficiency	70,83lm/W
CRI	80
Beam Angle	120°
Illumination Diagram	

Packing Info

Box Length	24,5cm
Box Width	24,5cm

Box Height	6cm
Box Weight	0,64kg
Pcs/Carton	20
Barcode	5291889045816
HS Code	9405409900

Certification & Warranty

Warranty	2 Years
Weee Directive	Yes