# 04 Recessed Spots Adjustable LED>The Interchangable Rings Range 11107K/W/W

Aluminium



6,5W COB LED adjustable recessed spot with interchargeable rings.

Ring must be ordered separately.

Requires 700mA driver.


Complies with standard EN60598-1 and any other specific standards.




## Downloads




## Dimensions

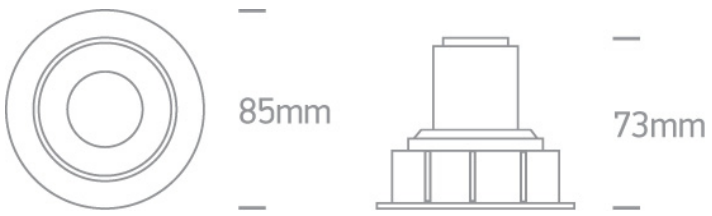


## Must be ordered separately


050102/B


050102/BS


050102/C


050102/CU


050102/W


89008A


89008AT

## Physical Specification

| | |
|---|---|
| Item Group | 04 Recessed Spots Adjustable LED |
| Family | The Interchangable Rings Range Aluminium |
| Order Code | 11107K/W/W |
| Colour | White |
| Material | Aluminium |
| Shape | Circular |
| Height | 73mm |
| Diameter | 85mm |
| Cutout Hole Diameter | 76mm |
| Recessed Ceiling | Yes |
| Depth Required | 100mm |
| Indoor | Yes |
| Adjustable | 1 Direction |

## Electrical Characteristics

### Fitting

| | |
|---|---|
| Input Type | Constant Current |
| Input Current | 700mA |
| Voltage | 9,3V |
| Safety Class | III |
| Power(Watts) | 6,5W |
| IP Rating | IP20 |
| Light Source | LED built in |
| LED Type | COB |
| LED Brand | Cree |
| LED Number | 1 |
| Cable Length | 40cm |
| F Mark | F |

## Illumination Data

| | |
|---|---|
| Colour Temperature | 3000K |
| Lumen Output | 550lm |
| Light Efficiency | 84lm/W |
| CRI | 80 |
| Beam Angle | 35° |
| Illumination Diagram |  |
| Dark Light | Yes |

## Packing Info

| | |
|---|---|
| Box Length | 9,5cm |
| Box Width | 9,5cm |
| Box Height | 8,5cm |
| Box Weight | 0.280kg |
| Pcs/Carton | 30 |
| Barcode | 5291889054160 |
| HS Code | 9405413990 |

## Certification & Warranty

| | |
|---|---|
| Warranty | 5 years |