
05 Downlights Fixed>LED Downlights

50122D/W/C

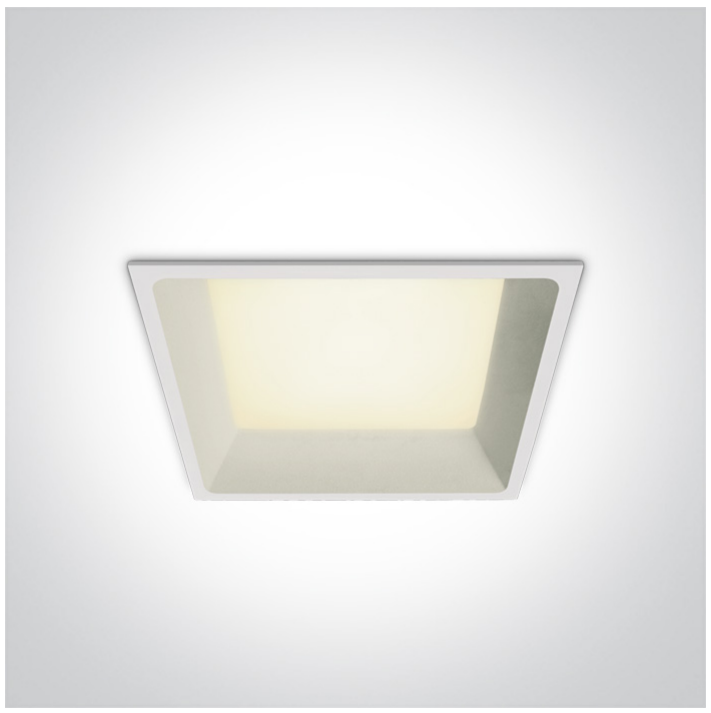

22W Dark Light LED Downlight .

Supplied with 500mA non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.

IP20 80 CRI DARK LIGHT CE

Downloads

IES

Dimensions

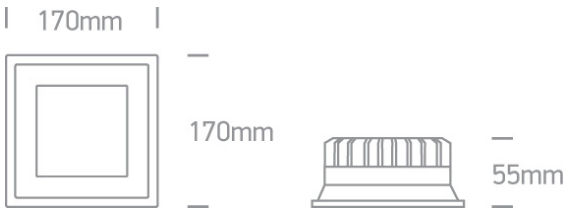

Physical Specification

Item Group	05 Downlights Fixed
Family	LED Downlights
Order Code	50122D/W/C
Colour	White
Material	Die Cast
Shape	Rectangular
Length	170mm
Width	170mm
Height	55mm
Cutout Hole Width	160mm
Cutout Hole Length	160mm
Recessed Ceiling	Yes

Depth Required	75mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	22W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting

Input Type	Constant Current
Input Current	500mA
Voltage	40V
Safety Class	
Power(Watts)	20W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Sanan

Gear

Gear Type	Led Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	12,5-20W
Power Factor	0,9
Constant Current	Yes
500mA	25-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	-30? ~ +50?
Housing Material	Plastic
Brand	Lifud

Illumination Data

Colour Temperature	4000K
Lumen Output	1870lm
Light Efficiency	85lm/W
CRI	80
Beam Angle	100°
Illumination Diagram	
Dark Light	Yes

Packing Info

Box Weight	0.660kg
Pcs/Carton	20
Barcode	5291889060802
HS Code	9405413990

Certification & Warranty

Warranty	2 years