13 Plafo>The Floating Plafo Aluminium

# 62160FB/W/W



60W LED slim plafo light, IP20, suitable for residential and commercial application.

Complete with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.




## Downloads




## Dimensions

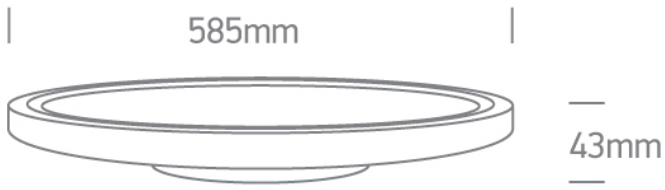


## Physical Specification

| | |
|---|---|
| Item Group | 13 Plafo |
| Family | The Floating Plafo Aluminium |
| Order Code | 62160FB/W/W |
| Colour | White |
| Material | Aluminium |
| Shape | Circular |
| Height | 43mm |
| Diameter | 585mm |
| Surface Ceiling | Yes |
| Indoor | Yes |
| Adjustable | No |

## Electrical Characteristics

| | |
|---|---|
| Gear | External-Included |

### Fitting + Driver

| | |
|---|---|
| Input Voltage | 220-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| Safety Class |  |
| Power(Watts) | 60W |
| IP Rating | IP20 |
| Light Source | LED built in |
| Dimmable | No |
| F Mark |  |

### Fitting

| | |
|---|---|
| Input Type | Constant Current |
| Input Current | 1500mA |
| Voltage | 39V |
| Safety Class |  |
| Power(Watts) | 58,5W |
| IP Rating | IP20 |
| Light Source | LED built in |
| LED Type | SMD 2835 |
| LED Brand | Sanan |
| F Mark |  |

### Gear

| | |
|---|---|
| Gear Type | Led Driver |
| Input Voltage | 220-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |

| | |
|---|---|
| Power(Watts) | 37,5-63W |
| Power Factor | 0,9 |
| Constant Current | Yes |
| 1500mA | 25-42V |
| IP Rating | IP20 |
| Safety Class |  |
| Dimmable | No |
| Ambient Temp | 40°C |
| Operating Temp | 80°C |
| Housing Material | Plastic |
| Output Terminal | Cable |
| Fast Connector | Yes |
| Fast Connector Type | Other |
| Brand | Lifud |

## Illumination Data

| | |
|---|---|
| Colour Temperature | 3000K |
| Lumen Output | 5300lm |
| Light Efficiency | 88,33lm/W |
| CRI | 90 |
| Illumination Diagram |  |

## Packing Info

| | |
|---|---|
| Box Weight | 5.000kg |
| Pcs/Carton | 3 |
| Barcode | 5291889057437 |
| HS Code | 9405413990 |

## Certification & Warranty

| | |
|---|---|
| Warranty | 3 years |