13 Plafo>The LED Plafo Outdoor

67280AN/W/W



24W LED plafo light, IP65, ideal for both indoor and outdoor installation.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.

IP65 IK08 80 CRI CE

Downloads

IES CE

Dimensions

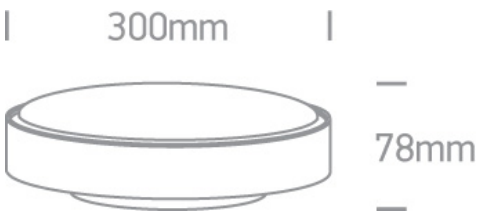

Physical Specification

Item Group	13 Plafo
Family	The LED Plafo Outdoor
Order Code	67280AN/W/W
Colour	White
Material	Plastic
Diffuser Material	PC
Shape	Circular
Height	83mm
Diameter	300mm
Surface Ceiling	Yes
Indoor	Yes
Outdoor	Yes

Adjustable	No
IK Rating	8

Electrical Characteristics

Gear	Built In

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	⧈
Power(Watts)	24W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
F Mark	▽F

Fitting

Input Type	Constant Current
Input Current	600mA
Voltage	38V
Power(Watts)	22,8W
IP Rating	IP65
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Epistar
LED Number	121
F Mark	▽F

Gear

Gear Type	Led Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	15,6-26W
Power Factor	0,9
Constant Current	Yes
600mA	26-43,5V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Eaglerise

Illumination Data

Colour Temperature	3000K
Lumen Output	1440lm
Light Efficiency	60lm/W
CRI	80
Illumination Diagram	

Packing Info

Box Length	30,5cm
Box Width	30,5cm
Box Height	8,5cm
Box Weight	1.230kg
Pcs/Carton	10
Barcode	5291889043300
HS Code	9405114090

Certification & Warranty

Warranty	2 years