


Propiedades - Properties

Descripción


Panel fabricado a partir de dos placas de microfibras poliéster - no contaminante - reciclable - aislante térmico - retardante al fuego - resistente a la humedad - resistente a impactos - fácil de instalar y limpiar.

- ⑩ Placa de microfibras poliéster 9 mm
- ⑩ Polyester fiber panel 9 mm

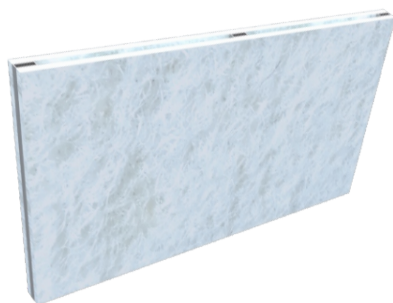

Description

Panel made from two polyester fiber boards - non-polluting - recyclable - thermal insulation - flame retardant - moisture-proof - impact resistant - easy to install and to clean.

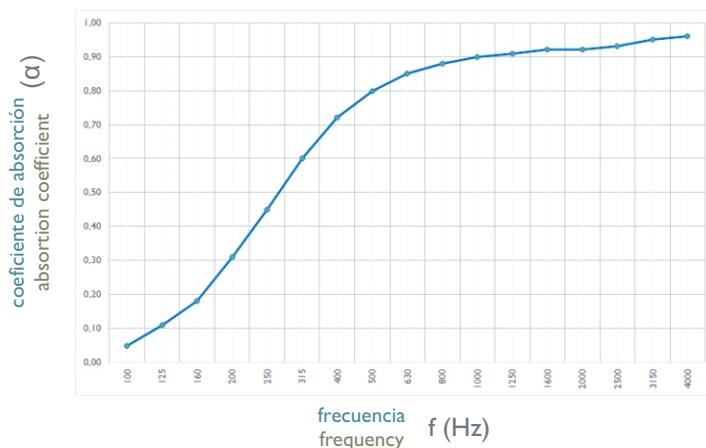

$\alpha_w = 0.85$



NRC = 0.78

f (Hz)	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000
α_w	0,05	0,11	0,18	0,31	0,45	0,60	0,72	0,80	0,85	0,88	0,90	0,91	0,92	0,92	0,93	0,95	0,96

Datos técnicos - Technical data

Característica Characteristics	Especificación Specification
Material Material	100% Fibra poliéster reciclable 100% Polyester fiber recyclable Eco-friendly standard
Densidad Density	1.5 Kg/m ²
Espesor estándar Standard Thickness	9 mm / 12 mm
Retardante al fuego Flame retardant	Clase Class E0 / B - S1, d0

