
REV	DESCRIPTION OF REVISION	E.C.N.	BY	APPROVED	DATE
Α	GLASS STOP WAS .043		E.C.	E.T.W.	3-06-15

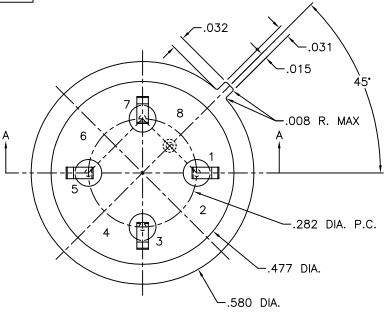


MATERIAL:

EYELET - 30/70 COPPER CLAD KOVAR. GLASS - 7052 OR EQUAL, OPAQUE. LEADS - ASTM F-15 ALLOY, KOVAR. MOUNT - 200 NICKEL, 1/2 HARD.

PLATING:

- 1. OPTION: RoHS COMPLIANT ELECTROLESS NICKEL PLATE OF 100 MICROINCHES MINIMUM FINAL PLATE.
- 2. OPTION: RoHS COMPLIANT ELECTROLESS NICKEL PLATE OF 100 MICROINCHES MINIMUM FOLLOWED BY A ROHS COMPLIANT LEAD FREE SOLDER COAT, ON LEADS ONLY.
- 3. OPTION: Rohs COMPLIANT ELECTROLESS NICKEL PLATE OF 100 MICROINCHES MINIMUM FOLLOWED BY A GOLD FLASH OF .99999 PURE 24 KART GOLD UP TO A MAX. OF 8 MICROINCHES.

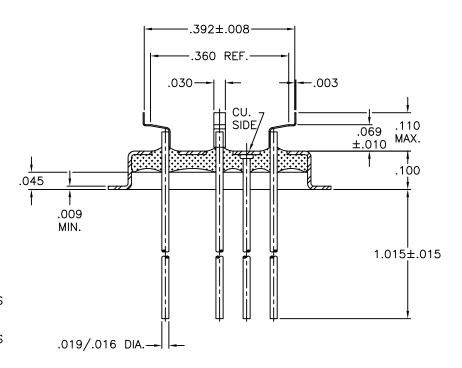

SECTION A-A

ſ	DRAWN BY:	MATERIAL:			T	OLERANCING	PER ANSI	Y14.5	A		
	E.T.W. 06-11-10	SEE ABOVE			.x	± .005	.XXX	±.005	MISSION		. 47th TERR. , KS. 66203 3-432-2487
Ì	CHECKED BY:	APP. SPECS	S SUPERSEDES NEXT ASSY .XX ± .005 ANG ± 5* UNLESS OTHERWISE SPECIFIED				Legacy Technologies Inc.	FAX: 913-432-0570			
	E.T.W. 06-11-10				SCALE		FINISH: UNLESS OTHERWISE SI		PART NUMBER:		
	APPROVED BY:	TITLE: HC-37/U .017 DIA. (COLD WELD TO-8)					CW-T08-017Y-CN3300	RoHS	A		
	W/ CHAIR MOUNTS						FILE: HB00014A	PAGE	1 of 1		