


ROOM FINISH SCHEDULE						
ROOM NUMBER	ORIENTATION	FLOOR	WALL	BASE	CEILING	REMARKS
	ENTIRE ROOM					
	PARTIAL WALL					
	FULL WALL					
	ROOM NAME	(V.C.T.) TILE	UNFINISHED	WOOD BASE	2X4 SUSP. A.C.T.L.	
101	DINING	12" X 12" POLY. C.C.	CARPET	NO BASE	EXPOSED	
102	WOMEN	•	•	•	•	PROVIDE 4" H. WAINSCOT
103	MEN	•	•	•	•	PROVIDE 4" H. WAINSCOT
104	OFFICE	•	•	•	•	PROVIDE 4" H. WAINSCOT
105	UNISEX	•	•	•	•	PROVIDE 4" H. WAINSCOT
106	KITCHEN	•	•	•	•	PROVIDE FULL-HT. WAINSCOT
107	MECHANICAL	•	•	•	•	VARIES
108	STORAGE	•	•	•	•	VARIES

WALL TYPES		
WALL LEGEND	DESCRIPTION	1-HOUR
	6", 16 GA. STUDS AT 16" O.C. WITH 7/8" EXTERIOR STUCCO SYSTEM OVER 5/8" EXTERIOR SUBSTRATE AND 5/8" GYPSUM BOARD ON INTERIOR SIDE, PROVIDE R-19 BATT INSULATION	NONE
	6", 16 GA. STUDS AT 16" O.C. WITH 7/8" EXTERIOR STUCCO SYSTEM OVER 5/8" EXTERIOR SUBSTRATE AND 5/8" GYPSUM BOARD ON INTERIOR SIDE	NONE
	6", 16 GA. STUDS AT 16" O.C. WITH 7/8" EXTERIOR STUCCO SYSTEM OVER 5/8" EXTERIOR SUBSTRATE AND 26 GA. DECK ON INTERIOR SIDE	NONE
	6", 16 GA. STUDS AT 24" O.C. WITH 5/8" GYPSUM BOARD ON BOTH SIDES	NONE
	3-5/8", 16 GA. STUDS AT 24" O.C. WITH 5/8" GYPSUM BOARD ON BOTH SIDES (PROVIDE MOISTURE-RESISTANT GYPSUM BOARD AT RESTROOMS)	NONE
	6", 16 GA. STUDS AT 16" O.C. WITH R-19 BATT INSULATION AND 26 GA. LINER PANEL ON INTERIOR SIDE	NONE

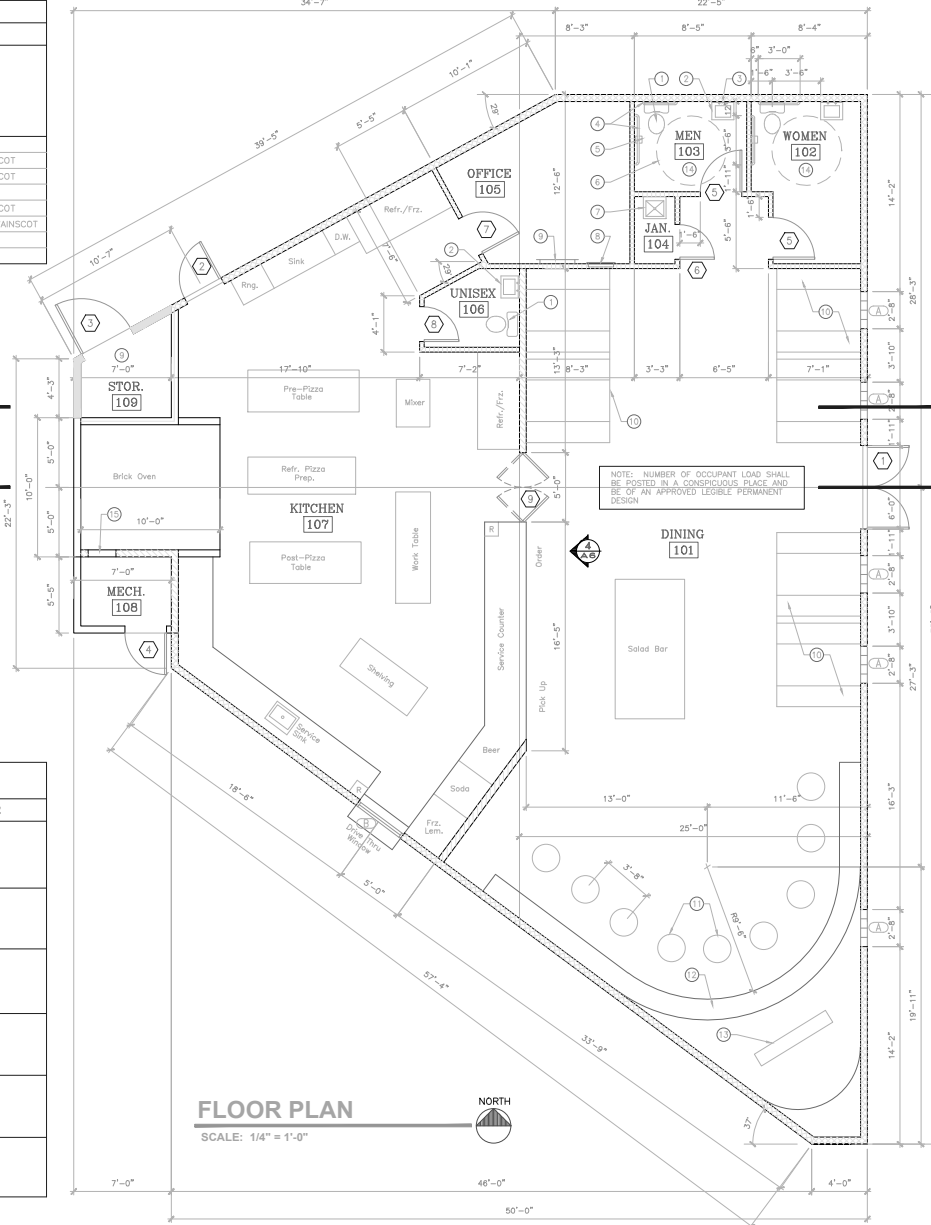

- ### NOTES
1. WATER CLOSET PER PLUMBING PLAN
 2. SINK PER PLUMBING PLAN
 3. A.D.A. APPROVED MIRROR
 4. A.D.A. APPROVED H.C. GRAB BARS
 5. TOILET PAPER DISPENSER
 6. 5'-0" DIA. H.C. TURNING RADIUS
 7. MOP SINK PER PLUMBING PLAN
 8. ELECTRICAL PANEL LOCATION PER ELECTRICAL PLAN
 9. TELEPHONE BOARD PER ELECTRICAL PLAN
 10. SEATING BOOTH BY OTHERS
 11. STOOL SEATING BY OTHERS
 12. 42" HIGH COUNTER BY OTHERS
 13. TELEVISION SET BY OWNER
 14. SEE SHEET 1/A3 FOR HANDICAPPED PLUMBING FIXTURE AND ACCESSORY HEIGHTS
 15. 24"X24" ACCESS PANEL, 1-HR. RATED

- ### WINDOW SCHEDULE
- | | |
|---|---|
| A | 2'-8" X 7'-4" 8X8 OBSCURED GLASS BLOCK |
| B | 4'-0" X 3'-4" DOUBLE-PANE SLIDING WINDOW WITH LOW-E |

- ### DOOR SCHEDULE
- | | |
|---|---|
| 1 | PAIR 3070 ALUM. STOREFRONT DOORS, CLOSER, THRESHOLD, WEATHERSTRIP, PANIC HARDWARE & DEADBOLT. |
| 2 | 3070 INSULATED HOLLOW METAL DOOR, CLOSER, THRESHOLD, WEATHERSTRIP, PANIC HARDWARE & KEYED LOCKSET. PROVIDE SIGNAGE STATING "THIS DOOR TO REMAIN UNLOCKED DURING BUSINESS HOURS" |
| 3 | 4070 HOLLOW METAL DOOR WITH KEYED LOCKSET |
| 4 | 3070 HOLLOW METAL DOOR WITH KEYED LOCKSET |
| 5 | 3070 SOLID CORE DOOR WITH CLOSER AND PRIVACY LOCK |
| 6 | 2670 SOLID CORE DOOR WITH KEYED LOCKSET |
| 7 | 3070 SOLID CORE DOOR WITH KEYED LOCKSET |
| 8 | 2670 SOLID CORE DOOR WITH CLOSER AND PRIVACY LOCK |
| 9 | PAIR 2630 WOOD DOOR WITH DOUBLE-SWING ACTION |

OWNER:
MARIO BERNARDONE
 21 ROAD 1740
 FARMINGTON, N.M. 87401
 HOME: (505) 326-0333

NO. _____ REVISION _____ BY CHK'D DATE _____

PROPRIETARY NOTE

© 2006

THIS DRAWING AND ALL INFORMATION CONTAINED HEREIN, INCLUDING ANY REVISIONS, ARE THE PROPERTY OF CHARTERED ARCHITECTS, P.C. NO PART OF THIS DRAWING OR INFORMATION CONTAINED HEREIN IS TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT THE WRITTEN PERMISSION OF CHARTERED ARCHITECTS, P.C.

STATE OF NEW MEXICO
 REGISTERED ARCHITECT
 CHARLES L. PEARSON
 1220
 87409 (505) 832-8690

FLOOR PLAN

CHARLES L. PEARSON
 P.O. Box 807
 NAVAJO DAM NM
 87419 (505) 832-8690

JOB	DATE	REVISION	SHEET
8001	RE	CLP	4/27/06
			A2