



PASS & SEYMOUR®

Plug Load Hospital Grade Devices Heavy-Duty Decorator Receptacles Tamper-Resistant 20A, 125V



TR26362HGCDRED

TR26362HGCHGRY


Sturdy tamper-resistant receptacles in Decorator-style.

TR26362HGCHGRY, TR26362HGCHW, TR26362HGCHRED

Sleek, ergonomic Decorator-style matches other Decorator devices while giving the same performance and ease of installation as our standard tamper-resistant devices. The thermoplastic dual mechanical shutter system helps prevent children from sticking objects into the receptacle. They feature screw-pressure-plate back wiring and a back wire clamp on the ground terminal.

Pass & Seymour® Plug Load Fed Spec Tamper-Resistant Duplex Receptacles – is a convenient device that allows a facility to meet all of their plugload energy requirements and maintain a hospital grade rating.

Features & Benefits

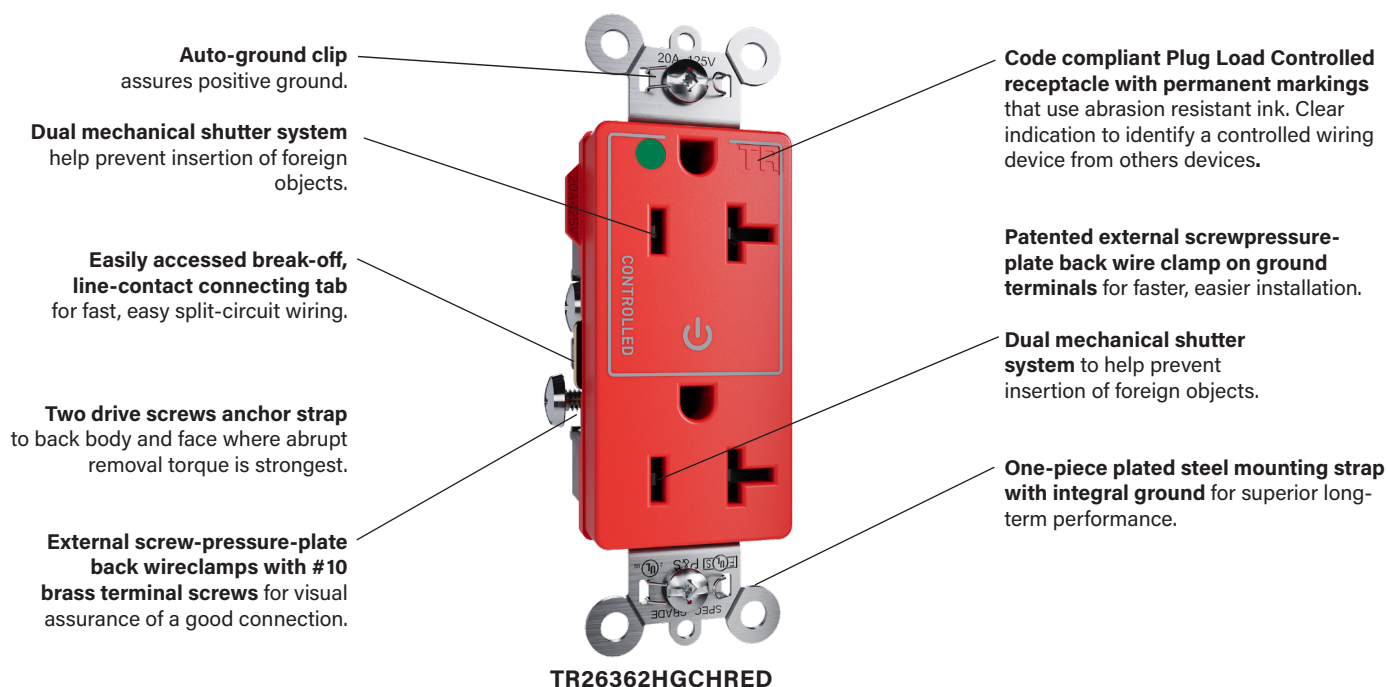

3rd Party Compliance



cULus Listed, UL Fed Spec Listed

Complies with test requirements UL 498, UL 1310. Fed Spec WC596, CSA C22.2 No. 42, CSA C22.2 No. 223

CA Title 24, and ASHRAE Energy Efficiency Standard 90.1

2024 International Energy Conversation Code (IECC), 2024 NEC, Part 6: Building Energy Efficiency Standards

Technical Information

Performance

Electrical

Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

Mechanical


Terminal Identification	Terminal Identification in accordance with UL498 (Brass, White, Green)
Terminal Accommodation	#14 AWG - #10 AWG copper conductor only
Product Identification	Ratings are a permanent part of the device

Environmental

Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C (without impact)

Materials

Face	Nylon
Back Body	Nylon
Line Contacts	.036 688 Brass
Mounting Strap	Plated Steel
Ground Contacts	Strap with Integral Ground
Pressure Plate	.031 260 Brass
Tamper Shutter	Thermoplastic
Terminal Screws	#10 Tri-Drive Brass (Neutral = Nickel-Plated Steel)
Ground Screw	#10 Hex Tri-Drive Brass
Assembly Drive Screw	Zinc-Plated Steel
Auto-Ground Clip	Steel
Mounting Screws	Tri-Drive Steel

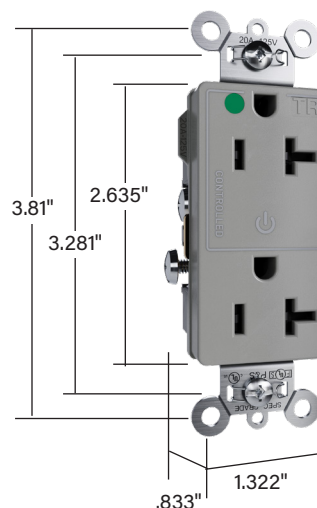

TR26362HGCHGRY

Warranty

1 Year

Ordering Information - Tamper-Resistant Duplex Receptacles Back & Side Wire

Catalog Number		Rating		Color	NEMA Config. No.
		A.	V.		
TR26362HGCHGRY	TR Decorator HG Half Cont	20	125	Gray	5-20R
TR26362HGCDGRY	TR Decorator HG Dual Cont	20	125	Gray	5-20R
TR26362HGCHW	TR Decorator HG Half Cont	20	125	White	5-20R
TR26362HGCDW	TR Decorator HG Dual Cont	20	125	White	5-20R
TR26362HGCHRED	TR Decorator HG Half Cont	20	125	Red	5-20R
TR26362HGCDRED	TR Decorator HG Dual Cont	20	125	Red	5-20R



Vertical Markets

- Health Care

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.



Legrand, North America
60 Woodlawn Street
West Hartford, CT 06110
877-295-3472
www.legrand.us

Canada
844-977-3783
www.legrand.ca

FOLLOW US

