

CON-E-CO®

An Oshkosh Corporation Company

CON-E-CO® TILT MIXERS:



***INNOVATIVE DESIGN.
BUILT STRONG.
PROVEN PRODUCTIVITY.***

TILT MIXERS THAT ARE PROVEN PERFORMERS.

Built for productivity, long life and reliability. Engineered to be easy to install.
Retrofits on a wide range of plants – virtually any brand. -



DESIGNED TO RAISE THE STANDARD. BUILT TO GO THE DISTANCE.

CON-E-CO tilt mixer is a large volume drum that shortens mixing times and boosts productivity.

Dedication to constant improvement:

- Variable Frequency Drive (VFD) to reduce wear and cleanup
- Ultra Life paddle liners and advanced "Five Star" mixer paddle
- SAE 4340 alloy mixer ring gear through hardened with 1" thick belly band
- Continuous submerge arc welded gear to belly band and belly band to drum
- Industry-leading bogey support roller system
- Gear teeth engagement preset at factory



OVERSIZED CAPACITY

- True capacities of 12- or 15-cubic yards
- Increased quality of concrete mix
- Shortened mix time
- Allows for 54" wide conveyor belt charging while maintaining ratings of 12- or 15-cubic yard capacities

FIVE-STAR PADDLE MIXING SYSTEM

- Simple design for easy replacement
- Aggressive mixing action for quality concrete mixing
- Shortened mixing time

NO MIXING PADDLES IN CONE

- Even, controlled discharge for faster truck mixer charging
- Does not retard discharge of low-slump concrete
- Not needed for capacity rating

MACHINE CUT RING AND PINION GEARS


- Smooth and quiet operation
- Through hardened stress relieved ring and pinion gears for longer life.
- 5" wide track and rollers

MACHINE TURNED — 1" THICK X 14" WIDE RING GEAR BELLY BAND

- Superior roundness of drum insures smooth operation and extends life
- Heavy-duty belly band greatly increases strength at critical load area of mixer drum

BOGEY ROLLERS

- Trunion mount
- Four 5" wide load rollers instead of two
- Decreased point loading by 50% thus reducing stress on the ring gear, rollers and bearings

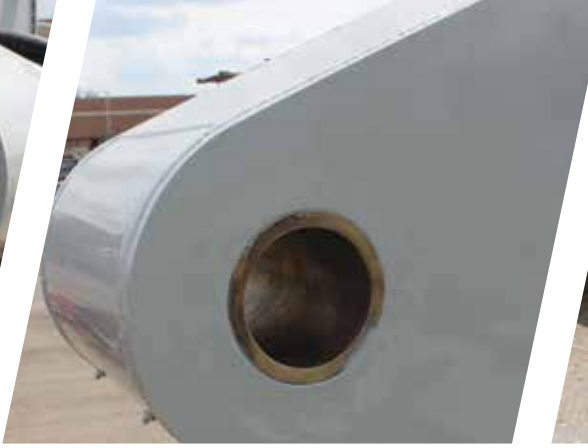

AUTOMATIC RING GEAR OILER

- Increases life of ring and pinion gear
- Automatic system reduces maintenance time

PLANETARY DRIVE SYSTEM

- Two (2) 75 or two (2) 100 horsepower motors
- All motors totally enclosed and fan cooled for lasting, durable operation
- Heavy-duty planetary gear drives transfer more horsepower to mixer over conventional drives
- Low mount drive for easy access

1" URETHANE DRUM AND PADDLE LINERS

- Longer drum and mixer paddle life
- Quick and easy cleanout

4 7/16" DIAMETER BRONZE BUSHED TILT PINS

- Oversized for long life and smooth, reliable operation

LARGE HYDRAULIC RESERVOIR WITH TANK HEATER

- Large capacity oil reservoir and built-in cooler
- Tank heater preheats oil during plant startup to insure consistent hydraulic operations
- Heavy-duty components for long life
- Hydraulic power pack design for easy serviceability

SHIPPED ASSEMBLED AND PRE-WIRED

- Factory pre-assembly reduces field assembly cost
- Pre-wired means no costly field wiring
- Mixer is factory tested

65,000 POUNDS — DELIVERED

- Heavy-duty mixer drum for added strength and long life
- Heavy-duty tilt frame designed for extreme duty and long life
- Heavy-duty stationary frame for solid foundation and long life



SUPPORT THAT IS SECOND TO NONE.

When you choose a CON-E-CO tilt mixer, you also get the full resources of our exceptional dealer network and unbeatable factory support.

**To learn more, visit con-e-co.com
or call 1-800-656-2651.**



CON-E-CO®

An Oshkosh Corporation Company

237 North 13th Street • Blair, Nebraska 68008 • 402-426-4181 • Fax 402-426-4180