

B230D -TL40 - S3050 - B1 - M 750W - B

型號
Model

孔型與每轉移動量
Hole type and movement per revolution

行程
Stroke

馬達方向
Motor direction

馬達廠牌及出力
Motor brand and output

煞車
Brake

T 底部通孔
Through hole
Y 底部牙孔
Thread hole

馬達方向 Motor direction

B1 馬達左折上端 Motor leftward,upper position
B2 馬達右折上端 Motor rightward,upper position
B3 馬達左折水平 Motor leftward,horizontal position
B4 馬達右折水平 Motor rightward,horizontal position
B5 馬達左折下端 Motor leftward,lower position
B6 馬達右折下端 Motor rightward,lower position



馬達廠牌及出力 Motor brand and output

H 上銀 Hiwin
X 西門子 Siemens
M 三菱 Mitsubishi
Y 安川 Yaskawa
P 松下 Panasonic
F 富士 Fuji
T 台達 Delta

B230D規格表(B230D Specification):

馬達出力 AC Servo motor output(W)	750W
重覆定位精度 Repeatability(mm)	±0.04
每轉移動量 Equivalent to lead(mm)	39.9515
最大載重 Maximun payload(kg)	85
最快速度 Maximun speed(mm/sec)	2000
行程 Stroke(mm)	150~3050 100間隔 (interval)

線性滑軌23x22-2支 (Linear Guide23x22-2 個)



水平安裝應用(單位:mm)
Horizontal use

	90°	45°	0°
45kg	1588	790	350
65kg	1052	510	290
85kg	768	324	205


牆面安裝應用(單位:mm)
Wall installation use

	90°	45°	0°
40kg	500	247	1890
60kg	315	141	1155
85kg	205	205	768

*滑塊表面中心到搬送物重心的距離(僅供參考)


Distance center of slider top to center of gravity of object being transported (For reference only)

靜態容許負載慣量
Stidic Loading Moment




(單位:N.m) (Unit:N.m)
水平使用時 Static Loading Moment


MY	2052
MP	2052
MR	1810




B1




B2




B3



B4





B5



B6



B1

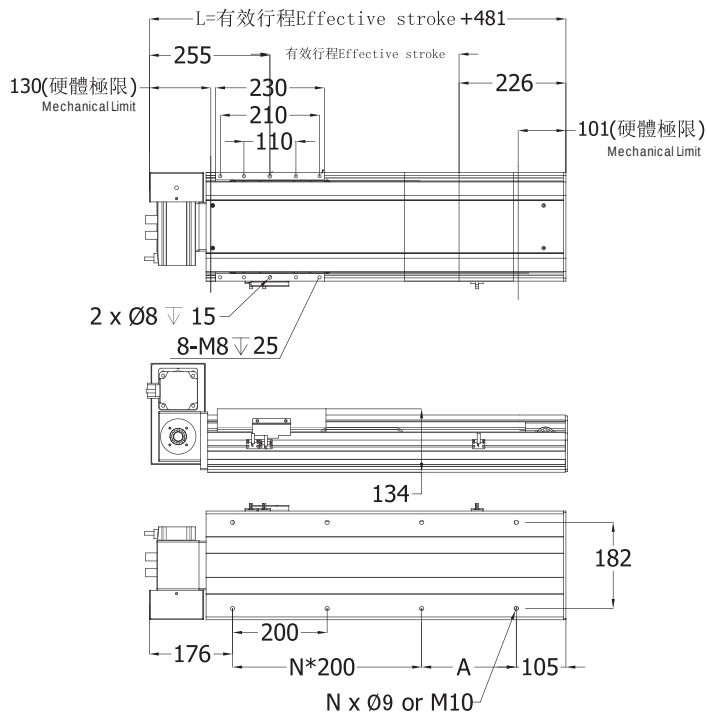

行程 Stroke	150	250	350	450	550	650	750	850	950	1050	1150	1250	1350	1450	1550	1650	1750	1850	1950	2050	2150	2250	2350	2450	2550	2650	2750	2850	2950	3050
L	631	731	831	931	1031	1131	1231	1331	1431	1531	1631	1731	1831	1931	2031	2131	2231	2331	2431	2531	2631	2731	2831	2931	3031	3131	3231	3331	3431	3531
A	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13	14	14	15	15
N	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34	36
重量(kg)	33	36	39	42	45	48	51	54	57	60	63	66	69	72	75	78	81	84	87	90	93	96	99	102	105	108	111	114	117	120

※本公司享有變更規格之權益，恕不另行通知 ※Drawings and specifications are subject to change without prior notice.


B2

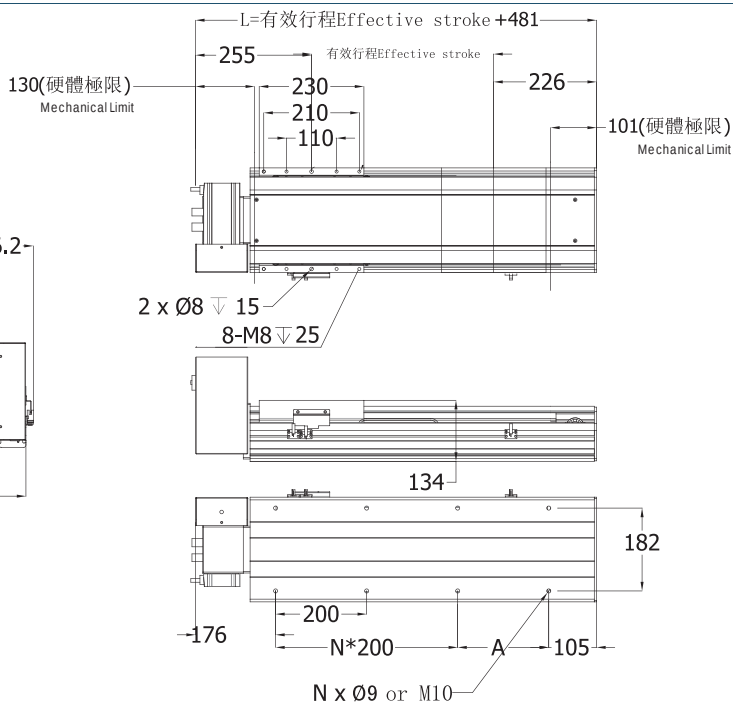

行程 Stroke	150	250	350	450	550	650	750	850	950	1050	1150	1250	1350	1450	1550	1650	1750	1850	1950	2050	2150	2250	2350	2450	2550	2650	2750	2850	2950	3050
L	631	731	831	931	1031	1131	1231	1331	1431	1531	1631	1731	1831	1931	2031	2131	2231	2331	2431	2531	2631	2731	2831	2931	3031	3131	3231	3331	3431	3531
A	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13	14	14	15	15
N	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34	36
重量(kg)	33	36	39	42	45	48	51	54	57	60	63	66	69	72	75	78	81	84	87	90	93	96	99	102	105	108	111	114	117	120

※本公司享有變更規格之權益，恕不另行通知 ※Drawings and specifications are subject to change without prior notice.


B3

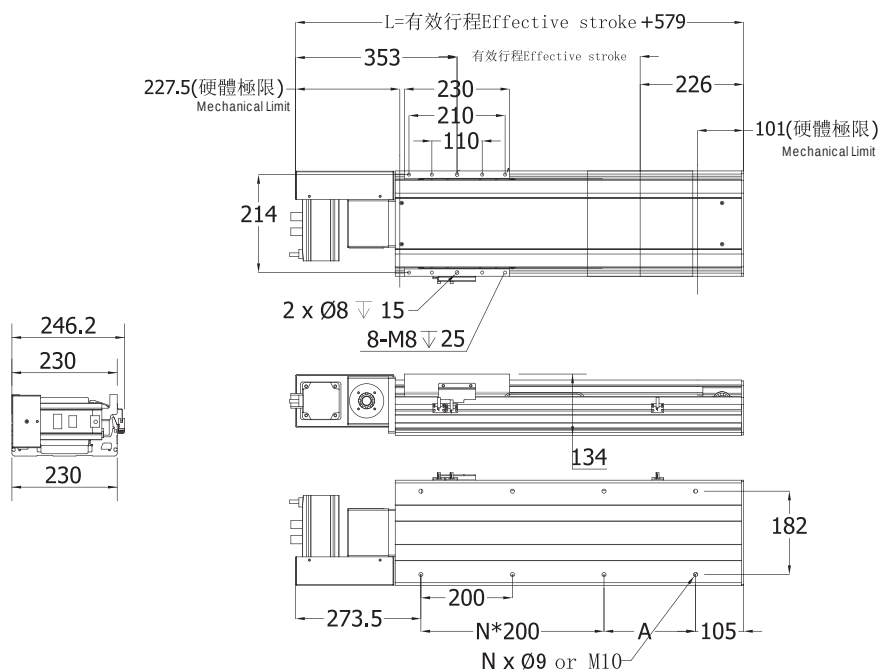

行程 Stroke	150	250	350	450	550	650	750	850	950	1050	1150	1250	1350	1450	1550	1650	1750	1850	1950	2050	2150	2250	2350	2450	2550	2650	2750	2850	2950	3050
L	729	829	929	1029	1129	1229	1329	1429	1529	1629	1729	1829	1929	2029	2129	2229	2329	2429	2529	2629	2729	2829	2929	3029	3129	3229	3329	3429	3529	3629
A	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13	14	14	15	15
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34
重量(kg)	33	36	39	42	45	48	51	54	57	60	63	66	69	72	75	78	81	84	87	90	93	96	99	102	105	108	111	114	117	120

※本公司享有變更規格之權益，恕不另行通知 ※Drawings and specifications are subject to change without prior notice.


B4

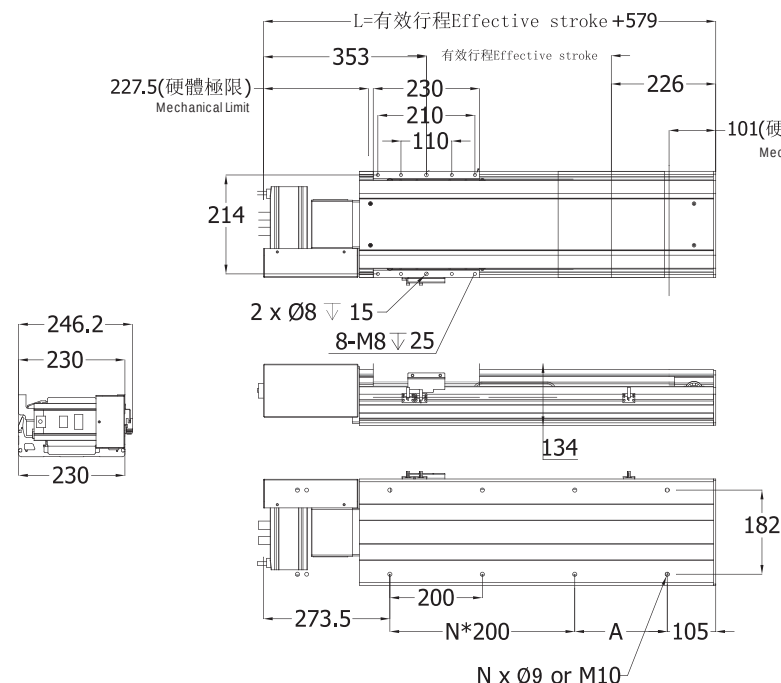

行程 Stroke	150	250	350	450	550	650	750	850	950	1050	1150	1250	1350	1450	1550	1650	1750	1850	1950	2050	2150	2250	2350	2450	2550	2650	2750	2850	2950	3050
L	729	829	929	1029	1129	1229	1329	1429	1529	1629	1729	1829	1929	2029	2129	2229	2329	2429	2529	2629	2729	2829	2929	3029	3129	3229	3329	3429	3529	3629
A	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13	14	14	15	15
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34
重量(kg)	33	36	39	42	45	48	51	54	57	60	63	66	69	72	75	78	81	84	87	90	93	96	99	102	105	108	111	114	117	120

※本公司享有變更規格之權益，恕不另行通知 ※Drawings and specifications are subject to change without prior notice.


B5

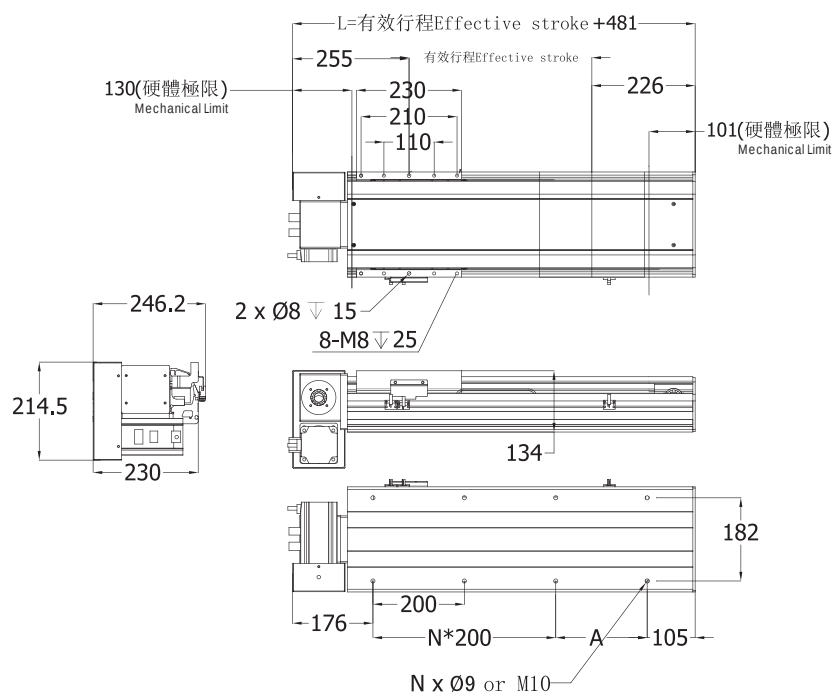

行程 Stroke	150	250	350	450	550	650	750	850	950	1050	1150	1250	1350	1450	1550	1650	1750	1850	1950	2050	2150	2250	2350	2450	2550	2650	2750	2850	2950	3050
L	631	731	831	931	1031	1131	1231	1331	1431	1531	1631	1731	1831	1931	2031	2131	2231	2331	2431	2531	2631	2731	2831	2931	3031	3131	3231	3331	3431	3531
A	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13	14	14	15	15
N	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34	36
重量(kg)	33	36	39	42	45	48	51	54	57	60	63	66	69	72	75	78	81	84	87	90	93	96	99	102	105	108	111	114	117	120

※本公司享有變更規格之權益，恕不另行通知 ※Drawings and specifications are subject to change without prior notice.

B6

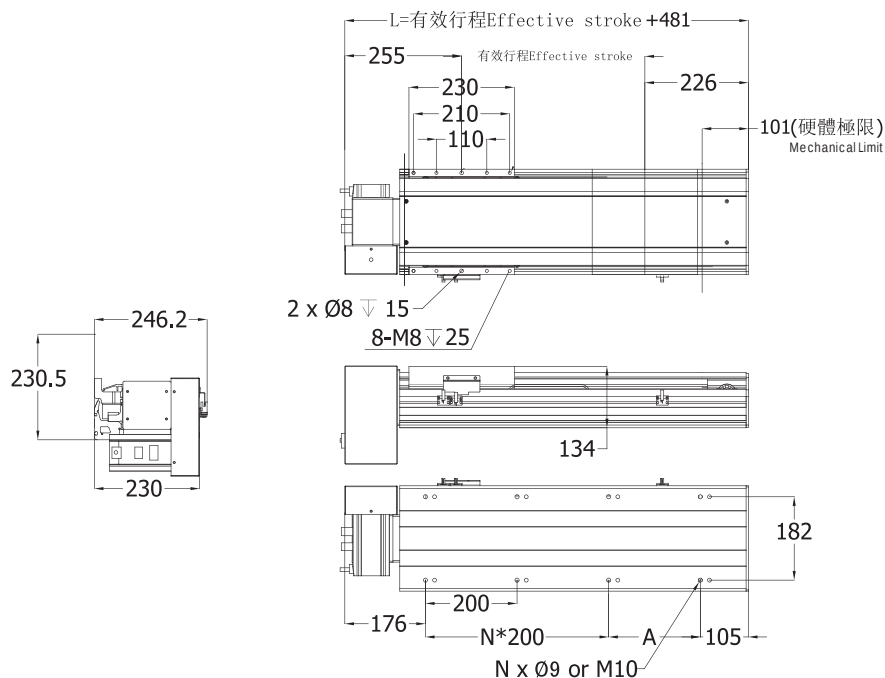

行程 Stroke	150	250	350	450	550	650	750	850	950	1050	1150	1250	1350	1450	1550	1650	1750	1850	1950	2050	2150	2250	2350	2450	2550	2650	2750	2850	2950	3050
L	631	731	831	931	1031	1131	1231	1331	1431	1531	1631	1731	1831	1931	2031	2131	2231	2331	2431	2531	2631	2731	2831	2931	3031	3131	3231	3331	3431	3531
A	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50	150	50
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13	14	14	15	15
N	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34	36
重量(kg)	33	36	39	42	45	48	51	54	57	60	63	66	69	72	75	78	81	84	87	90	93	96	99	102	105	108	111	114	117	120

※本公司享有變更規格之權益，恕不另行通知 ※Drawings and specifications are subject to change without prior notice.