

## The Avantis Flexi-Fit Window Lock

### Multi-point window locking for high corrosion environments

Manufactured entirely from either stainless or mild steel together with injection-moulded glass filled nylon, to ensure exceptional corrosion resistance in corrosive environments.

Profile specific nylon sliders ensure optimal fit and performance, reducing manufacturing times and extending service life.

### Features

- ✓ 20mm and 22mm back sets
- ✓ Easy-fit extensions enable simple sizing and offsetting
- ✓ Roller or Mushroom cam locking points
- ✓ Mild or stainless steel faceplate
- ✓ 10 Year Mechanical guarantee
- ✓ Corrosion resistance to EN1670: Grade 5 (480 hours NSS)\*


\*Performance on stainless steel faceplate



## Technical specifications


- ✓ 15mm wide faceplate
- ✓ 20mm and 22mm backsets
- ✓ 9mm cam height
- ✓ 304 grade stainless steel or mild steel faceplate
- ✓ 30% glass filled injection-moulded nylon components
- ✓ Corrosion resistance to EN1670: Grade 5 (480 hours NSS)\*
- ✓ Service life of over 50,000 cycles

\*Performance on stainless steel faceplate

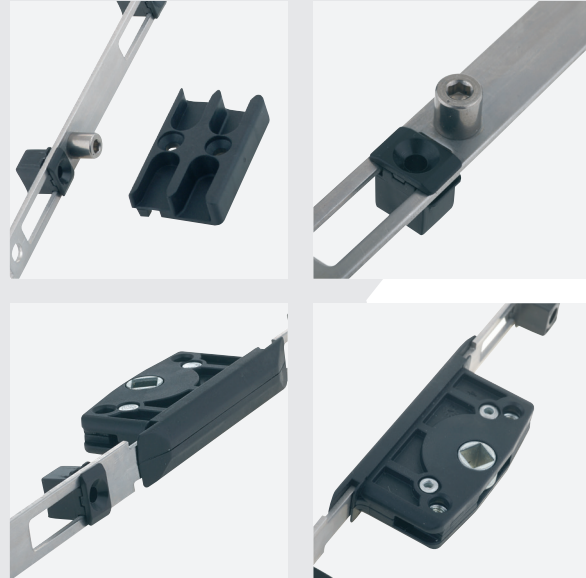

| 22mm Backset  | 20mm Backset  | Size (mm) | Cams | Box Quantity |
|---------------|---------------|-----------|------|--------------|
| WLFF1-250-3S  | WLFF2-250-3S  | 250       | 2    | 20           |
| WLFF1-400-3S  | WLFF2-400-3S  | 400       | 2    | 20           |
| WLFF1-600-3S  | WLFF2-600-3S  | 600       | 2    | 20           |
| WLFF1-800-3S  | WLFF2-800-3S  | 800       | 2    | 20           |
| WLFF1-1000-3S | WLFF2-1000-3S | 1000      | 3    | 20           |
| WLFF1-1200-3S | WLFF2-1200-3S | 1200      | 3    | 20           |

| EXTENSIONS | Part Number      | Size (mm) | Cams | Box Quantity |
|------------|------------------|-----------|------|--------------|
| Top        | WLFF1-EXT-317-3S | 317       | 1    | 20           |
| Bottom     | WLFF1-EXT-BTM-3S | 317       | 1    | 20           |

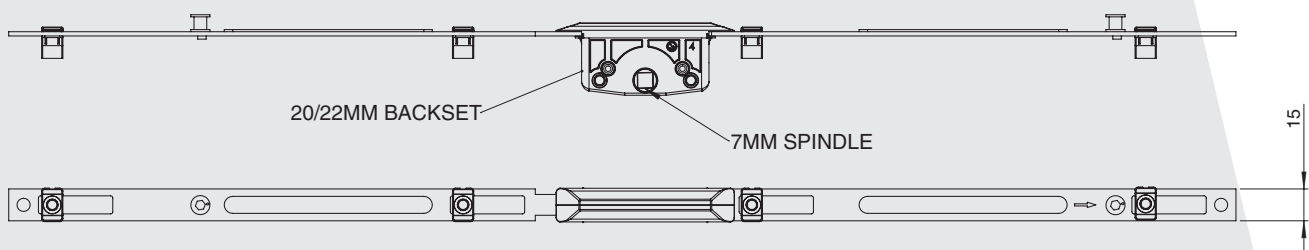

**Avantis Hardware Ltd**  
Grange Works, Mill Lane  
Rugeley  
Staffordshire WS15 2JW  
Tel: +44 1889 579364 Fax: +44 03300 100 502  
Website: [www.avantis-international.com](http://www.avantis-international.com)  
Email: [sales@avantis-international.com](mailto:sales@avantis-international.com)