

Magnetic *Film Fingers*


Film Fingers reinforce the top or bottom edges of the film for greater strength. By simply running along the roller of the Film Finger, the film's edge is folded and rolled, creating a durable band that protects the web from breaks and adds extra security to the load.

Film Fingers are available with a heavy duty magnetic base that you can mount on any stretch wrapper in the field with steel construction. The removable design means you can position the Film Finger at the top or bottom of the web, and as far into the web as needed to overcome any film breaks or film roll damage. Multiple Film Fingers can also be used to reinforce the top and bottom of the film web, or to attach to the bottom of the system to provide bottom roping.

*Magnetic Film Fingers are not meant to be used for tight film roping, only for folding the edge of the film

HIGHLIGHTS

- » Film Fingers will reinforce the film web to overcome damage and nicks to the film roll that might have otherwise been disposed of
- » Provides extra security and reduces film breaks for loads with sharp corners or large protrusions that might otherwise tear the film
- » Magnetic design allows for installation on any stretch wrapper in the field with steel construction

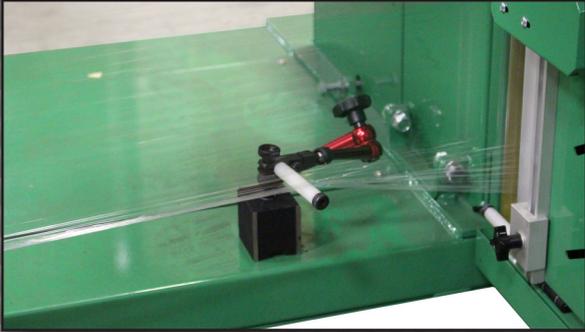

Bottom Roping

The magnetic base of the Film Finger allows the user to remove the unit and reposition it anywhere on the carriage, as well as on the base of the machine to provide bottom roping capabilities.

Bottom roping allows the bottom of the film web to be reinforced near the pallet only, to better secure the load the the pallet.

Retrofit

Magnetic Film Fingers are available for most stretch wrapping systems in the field. The magnetic base can be adhered to any steel surface, ensuring you can reinforce your film in a variety of ways, on a variety of machines.

Two Sizes Available

The Magnetic Film Fingers are available in two sizes: Standard and Large.

The Standard Film Fingers work best for reinforcement anywhere on the carriage or for bottom roping.

The Large Film Finger will work best in cases where the film output is further away from a suitable mounting location, or for bottom roping where the carriage is further away from the frame of the machine.

STANDARD MODEL SPECIFICATIONS

Max Extension Size	7 Inches
Magnet Strength	Up to 4.5 Pounds
Dimensions	1.13 x 2.13 x 7.75 Inches
Weight	1 Pound
Part Number	700904
PRICE	\$129.00

LARGE MODEL SPECIFICATIONS

Max Extension Size	13.5 Inches
Magnet Strength	Up to 7 Pounds
Dimensions	2 x 2 x 13.75 Inches
Weight	2.5 Pounds
Part Number	700908
PRICE	\$139.00

Contact:



2694 Prairie SW
Wyoming, Michigan 49519
800-531-2465