
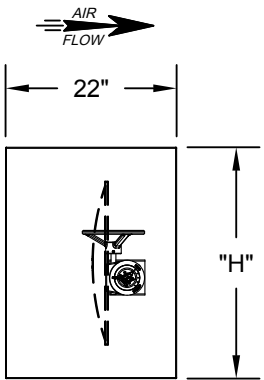



SIZE CODES

WIDTH "W"		1	2	3	4	5	6
		27"	51"	75"	102"	126"	150"
HEIGHT "H"	1	NOTE: UNITS COME IN WHOLE SIZES ONLY. ALL DAMPERS ON A SINGLE TIER ARE OPERATED BY THE SAME ACTUATOR.					
	29-3/4"						
	2						
	59-1/2"						
	3						
	89-1/4"						
	4						
	119"						



ORDER DETAILS

ITEM#	HEIGHT	WIDTH	QTY. REQ'D
1			
2			
3			
4			
5			
EX.	1	2	4

STANDARD OPTIONS

(CHECK IF APPLICABLE)

LEAK TEST REQUIREMENTS

BUBBLE TIGHT

MATERIAL

T-304 STAINLESS

T-316 STAINLESS

L GRADE

ACTUATOR LOCATION

RIGHT HAND (STANDARD)

LEFT HAND

ACTUATOR REQ.

MANUAL (AS SHOWN)

ELECTRIC (FULL OPEN, FULL CLOSE OPERATION)

1/60/110 VAC (STANDARD)

1/60/220 VAC

3/60/220-440 VAC

1/60/24 VAC

24 VDC

PNEUMATIC (FULL OPEN, FULL CLOSE OPERATION)

70 PSI

80 PSI (STANDARD)

90 PSI

SPRING RETURN

FAIL OPEN

FAIL CLOSED

OTHER OPTIONS

BEACON INDICATOR (VISUAL DISPLAY OPEN/CLOSED)

SOLENOID VALVE

MANUAL OVERRIDE (IF SPRING RETURN OPTION REQ.)

STANDARD TESTING SPECS:

BUBBLE TIGHT: THE DAMPER BLADE SHALL BE TESTED IN THE CLOSED POSITION AT ±10" W.G. AND SHALL BE BUBBLE TIGHT WHEN IN ACCORDANCE WITH ASME N510-1995 REAFFIRMED, "TESTING OF NUCLEAR AIR CLEANING SYSTEMS." THE COMPLETE DAMPER PRESSURE BOUNDARY SHALL BE LEAK TESTED AT ±10" W.G. AND HAVE A MAXIMUM ACCEPTABLE LEAK RATE OF .0005 CFM PER CUBIC FOOT OF HOUSING VOLUME.

OTHER LEAK RATE OPTIONS AND TESTING PARAMETERS ARE AVAILABLE UPON REQUEST, SPEAK WITH THE MAUFACTURERS SALES REPRESENTATIVE FOR DETAILS.

CUSTOMER INFORMATION

IF YOU DO NOT SEE THE OPTIONS YOU REQUIRE, THE MANUFACTURER CAN CUSTOM DESIGN YOUR DAMPER TO NEARLY ANY SIZE AND SPECIFICATION.

20" DISH STYLE DAMPER

P&G MANUFACTURING

WASHINGTON N.C. 27889
 PHONE NO.: 252-946-9110
 FAX NO.: 252-946-4823



SALES DRAWING

REV.	DRAWN BY DATE	DESCRIPTION:	APPR. BY DATE	DWG SCALE: NTS	
THE DEVICE DEPICTED AND DESCRIBED HEREON EMBODIES PROPRIETARY INFORMATION OWNED BY P&G MANUFACTURING INC. ALL DESIGN, MANUFACTURING, REPRODUCTION, SALES, AND PATENT RIGHTS REGARDING THIS DEVICE OR DRAWING ARE RESERVED EXCEPT WHERE EXPLICIT RIGHT IS GRANTED IN WRITING.		UNLESS OTHERWISE SPECIFIED • ALL DIMENSIONS ARE IN INCHES • TOLERANCES ARE: FRACTION: ±1/8" DECIMAL: ±.125" ANGULAR: ±1°		DRAWN BY: WMA	DATE: 5/7/10
APPROVED BY: JWW	DATE: 6/29/10	DRAWING NO.: CSD-015	SHEET 1	OF 1	REV. 0

DIMSCALE: 24" TEXT HEIGHT: