

## IBUC $\mathcal{R}$ X-Band Intelligent Block Upconverter

### IBUC Advantages

Integrated BUC/SSPA for higher performance and reliability.

Upgraded with a weatherized RJ45 M&C interface connector for simplified cable installation.

All models available with integral AC power supply or separate DC power supply.

Internal 10MHz reference option automatically switches to internal reference when external reference is not detected.

NMS-friendly interfaces enable remote management of your earth station RF.

Embedded Web pages provide management for small networks using any Web browser.


AGC or ALC circuits hold gain or output level constant.

30 dB User-adjustable gain in 0.1 dB steps preserves modem dynamic range.

Output sample port included.

Advanced user interfaces:

- TCP/IP HTTP with embedded Web pages
- SNMP
- TELNET through TCP/IP
- FSK through TX IFL cable
- RS232/485 serial port
- Hand-held terminal

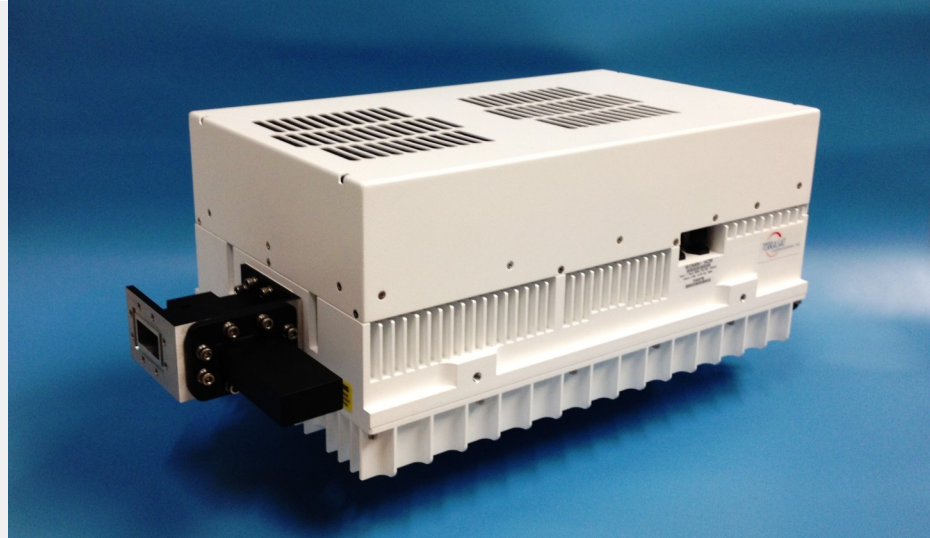

The **IBUC  $\mathcal{R}$**  has all of the advanced **IBUC** features and the upgraded RJ45 M&C connector.

**IBUC** offers significant benefits:

- Low terminal cost
- Simple design and installation
- Superior RF performance
- Simplified 1+1 configuration

New interfaces connect you to extensive M&C facilities for network management or local access. This powerful new M&C enables:

- **Trouble-free commissioning** with easy, point-and-click installation/configuration
- Continuous **verification** of performance with time-stamped alarm history
- Simplified **monitoring** of terminal status

The **IBUC** comes with a complete set of diagnostic tools including:

- 10 MHz input detector
- Input voltage and current monitoring
- Transmit L-band input level detector
- Transmit RF output level detector
- User configurable thresholds and alarms

Unique to the **IBUC** are internal AGC and ALC functions that satisfy demanding applications with stringent specifications.

# IBUC $\pi$

## X-Band Intelligent Block Upconverter

<b>Frequency range</b>	RF	IF
	7900 to 8400 MHz	950 to 1450 MHz

<b>Input</b>	
VSWR / Impedance	1.5:1 max / 50 Ohm
Input Connector	Type N female (50 Ohm)
Input Connector options	Type F (75 Ohm), TNC (50 Ohm)
Input power detector range	-55 to -20 dBm

<b>Gain</b>	
Small Signal Gain (L-band to RF) with attenuator set to 0 dB	
80W	80 dB min
100 W	81 dB min
125 W	82 dB min
150 W	83 dB min
175 W	83 dB min
Attenuator range	30 dB variable in 0.1 dB steps
Gain flatness	
Full band	4 dB p-p max
36 MHz	1.5 dB p-p max
1 MHz	0.25 dB p-p
Gain variation over temperature	
Open loop	3 dB p-p max
With AGC	1 dB p-p max

<b>RF Output</b>	
Interface	CPR-112G
VSWR	1.5:1 max
Rated output power (P1dB)	
80 W	+49 dBm min
100 W	+50 dBm min
125 W	+51 dBm min
150 W	+51.8 dBm min
175 W	+52.4 dBm min
IMD3 (2 carriers, 3 dB TOBO)	-27 dBc max
Level stability with ALC	$\pm 0.5$ dB
Output power detector range	Rated power to -20 dB
Power reading accuracy	$\pm 1.0$ dB max.
Spurious	In Band -65 dBc
	Out of Band Complies with MIL-STD 188-164B
Harmonics	-60 dBc max.
Output Noise Power Density	
TX Band	< -75 dBm/Hz
RX Band (with RX reject filter)	< -165 dBm/Hz
Mute	-70 dBc max.
AM-PM Conversion	< 3.0 deg/dB @ rated power
Group Delay	
Linear	0.03 ns/MHz
Parabolic	0.003 ns/MHz <sup>2</sup>
Ripple	1 ns p-p over any 36 MHz

<b>SSB Phase Noise</b>	External refer-	IBUC
10 Hz	-115 dBc/Hz	-55 dBc/Hz
100 Hz	-140 dBc/Hz	-80 dBc/Hz
1 kHz	-150 dBc/Hz	-90 dBc/Hz
10 kHz	-155 dBc/Hz	-95 dBc/Hz
100 kHz	N/A	-100 dBc/Hz
1 MHz	N/A	-110 dBc/Hz

### External Reference (multiplexed on TX IFL)

Frequency	10 MHz
Level	-12 to +5 dBm
Internal Reference - optional	

<b>Local Oscillator Frequency</b>	6950 MHz
Sense	Non-inverting

### IBUC Power Supply

Voltage	DC	42 V min, 60 V max
	AC	100 to 240 VAC , 100W to 125W 200 to 240 VAC , 150W to 175W

Power Consumption	DC	AC
	80 W	576 W
100 W	770 W	850 VA
125 W	880 W	950 VA
150 W	1100 W	1250 VA
175 W	1200 W	1300 VA

### Monitor and Control

**Ethernet** (HTTP, Telnet, SNMP), via RJ45 connector,  
**RS232/485, Hand-held Terminal** via MS-type connector,  
**FSK** multiplexed on TX IFL.

### Environmental

Operating temperature	-40°C to +55°C
Relative humidity	100% condensing
Altitude	10,000 ft., (3,000 m) ASL

<b>Mechanical</b>	DC powered	AC pow -
	80W	12.2x7.2x6.5 in. 18.5 lbs
100W-175W	16.2x10x7.2 in. 32 lbs	16.2x10x7.4 in. 33 lbs

(dimensions not including isolators)

Specifications are subject to change without notice.

IBUC Hi Power X-Band Data Sheet 2/9/16



**315 Digital Drive, Morgan Hill, CA 95037**  
**Tel. +1 408-782-5911 Fax +1 408-782-5912**  
**www.terrasatinc.com**